INDOOR UNIT	OUTDOOR UNIT
ASH070VE/D	AXH070VE/D
ASH090VE/D	AXH090VE/D
ASH120VE/D	AXH120VE/D
ASH071VE/D	AXH071VE/D
ASH091VE/D	AXH091VE/D
ASH121VE/D	AXH121VE/D
ASH074VE/D	AXH074VE/D
ASH094VE/D	AXH094VE/D
ASH124VE/D	AXH124VE/D
ASH075VE/D	AXH075VE/D
ASH095VE/D	AXH095VE/D
ASH125VE/D	AXH125VE/D

SERVICE Manual

AIR CONDITIONER

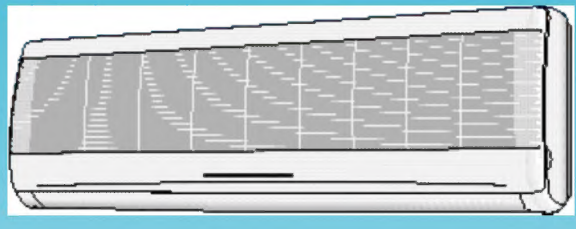

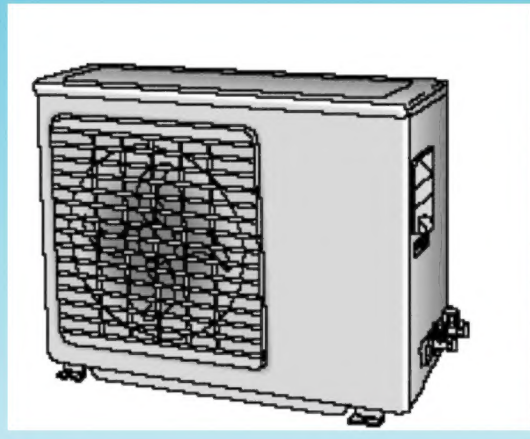

CONTENTS

1. Precautions
2. Product Specifications
3. Operating Instructions and Installation
4. Disassembly and Reassembly
5. Troubleshooting
6. Exploded Views and Parts List
7. Block Diagrams
8. PCB Diagrams
9. Wiring Diagrams
10. Schematic Diagrams

© Samsung Electronics Co., Ltd. FEB. 1997.
Printed in Korea.
Code No. DB81-10122A(1)

1. Precautions

1. Warning: Prior to repair, disconnect the power cord from the circuit breaker.

2. Use proper parts: Use only exact replacement parts. (Also, we recommend replacing parts rather than repairing them.)

3. Use the proper tools: Use the proper tools and test equipment, and know how to use them. Using defective tools or test equipment may cause problems later-intermittent contact, for example.

4. Power Cord: Prior to repair, check the power cord and replace it if necessary.

5. Avoid using an extension cord, and avoid tapping into a power cord. This practice may result in malfunction or fire.

6. After completing repairs and reassembly, check the insulation resistance. Procedure: Prior to applying power, measure the resistance between the power cord and the ground terminal. The resistance must be greater than 30 megohms.

7. Make sure that the grounds are adequate.

8. Make sure that the installation conditions are satisfactory. Relocate the unit if necessary.

9. Keep children away from the unit while it is being repaired.

10. Be sure to clean the unit and its surrounding area.

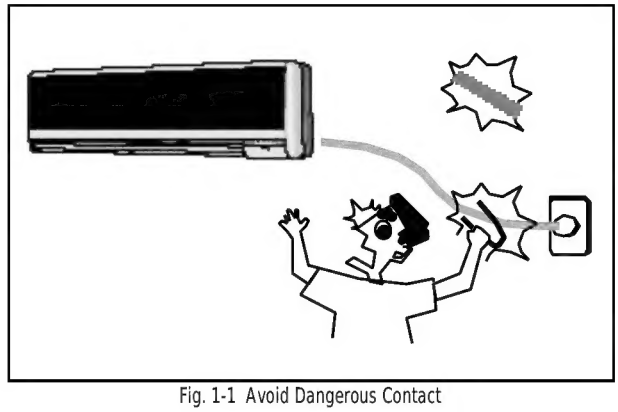

Fig. 1-1 Avoid Dangerous Contact

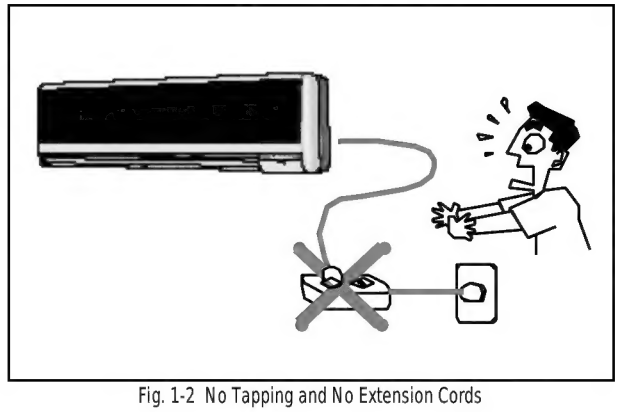

Fig. 1-2 No Tapping and No Extension Cords

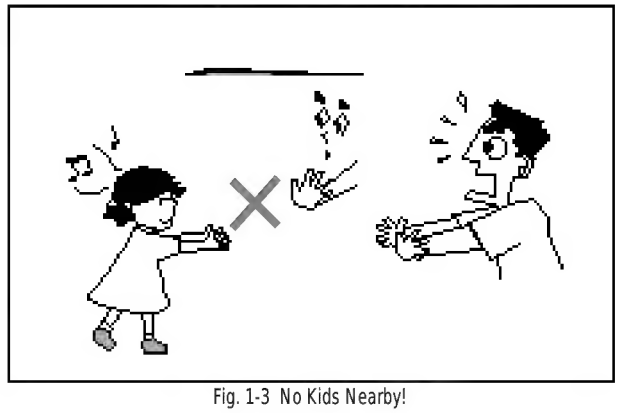

Fig. 1-3 No Kids Nearby!

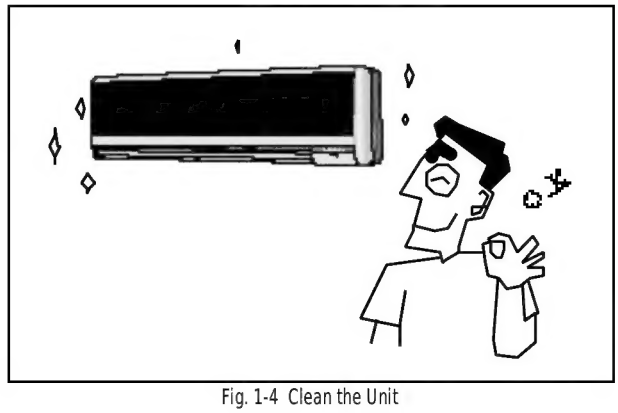

Fig. 1-4 Clean the Unit

MEMO

2. Product Specifications

2-1 Table

Item			Model	ASH070VE/ASH071VE/ASH074VE/ASH075VE		ASH090VD/ASH091VD/ASH094VD/ASH095VD		ASH090VE/ASH091VE/ASH094VE/ASH095VE		ASH090VD/ASH091VD/ASH094VD/ASH095VD		ASH120VE/ASH121VE/ASH124VE/ASH125VE		ASH120VD/ASH121VD/ASH124VD/ASH125VD	
				Indoor unit	Outdoor unit	Indoor unit	Outdoor unit	Indoor unit	Outdoor unit	Indoor unit	Outdoor unit	Indoor unit	Outdoor unit	Indoor unit	Outdoor unit
Type			-	Wall-mounting		Wall-mounting		Wall-mounting		Wall-mounting		Wall-mounting		Wall-mounting	
Perfor-mance	Cooling		BTU/h	7000		7000		9000		9000		12000		12000	
	Dehumiditying		l/h	1.2		1.2		1.6		1.6		1.9		1.9	
	Heating		BTU/h	7500		7500		10000		10000		13000		13000	
	Low temp. heating		BTU/h	-		-		-		-		-		-	
	Air volume	Cooling	m3/min	6.0		6.0		6.1		6.1		7.8		7.8	
		Heating	m3/min	6.2		6.2		6.9		6.9		8.2		8.2	
	Noise	Cooling	dB	35	45	35	45	35	45	35	45	38	49	38	49
		Heating	dB	35	45	35	45	35	45	35	45	38	49	38	49
	Energy efficiency ratio	Cooling	BTU/h.W	10.6		10.6		10.1		10.1		10.2		9.83	
		Heating	BTU/h.W	12.1		11.7		10.7		10.7		10.8		10.4	
	Power		V-Hz	1-220 / 240-50		1-200 / 220-50		1-220 / 240-50		1-220 / 220-50		1-220 / 240-50		1-200 / 220-50	
Power	Power Consumption	Cooling	W	660		660		890		890		1180		1220	
		Heating	W	620		640		930		930		1200		1250	
	operating Current	Cooling	A	2.8		3.3		4.0		4.2		5.0		5.9	
		Heating	A	2.7		3.2		4.0		4.2		5.2		6.1	
	Power factor	Cooling	%	98.2		90.9		92.7		96.3		98.3		94.0	
		Heating	%	95.7		90.9		96.9		99.9		96.2		93.1	
	Starting current		A	17.0		17.0		22.0		22.0		30.0		36.0	
	Power cord	Length	m	2	-	2	-	2	-	2	-	2	-	2	-
		Number of core wire		250V 10/16A		250V 10/16A		250V 10/16A		250V 10/16A		250V 10/16A		250V 10/16A	
	Fuse capacity		A	3.15	-	3.15	-	3.15	-	3.15	-	3.15	-	3.15	-
Size	Outer dimension	Width x Height x Depth	mm	815x298x182	720x525x245	185x298x182	720x525x245	815x298x182	720x525x245	185x298x182	720x525x245	815x298x182	720x525x245	185x298x182	720x525x245
			inch	32.08x11.73x7.17	28.35x20.67x9.65	32.08x11.73x7.17	28.35x20.67x9.65	32.08x11.73x7.17	28.35x20.67x9.65	32.08x11.73x7.17	28.35x20.67x9.65	32.08x11.73x7.17	28.35x20.67x9.65	32.08x11.73x7.17	28.35x20.67x9.65
	Weight		kg	9.6	28	9.6	28	9.6	28	9.6	28	9.6	32	9.6	32
	Refrigerant pipe	Liquid	OD(mm)x L(m)	ø6.35 x 5		ø6.35 x 5		ø6.35 x 5		ø6.35 x 5		ø6.35 x 5		ø6.35 x 5	
		GAS		ø9.52 x 5		ø9.52 x 5		ø9.52 x 5		ø9.52 x 5		ø12.7 x 5		ø12.7 x 5	
	Drain hose		ID(mm)x L(m)	ø17 x 2000		ø17 x 2000		ø17 x 2000		ø17 x 2000		ø17 x 2000		ø17 x 2000	
	Compressor	Type		-	Rotary	-	Rotary	-	Rotary	-	Rotary	-	Rotary	-	Rotary
		Motor Type		-	-	-	-	-	-	-	-	-	-	-	-
		Rated output	W	-	675	-	675	-	895	-	890	-	1210	-	1215
	Blower	Type		Cross-fan	Propeller	Cross-fan	Propeller	Cross-fan	Propeller	Cross-fan	Propeller	Cross-fan	Propeller	Cross-fan	Propeller
		Motor Type		Resin	Die casting	Resin	Die casting	Resin	Steel	Resin	Steel	Resin	Die casting	Resin	Steel
		Rated output	W	35	20	35	20	35	20	35	20	35	20	35	20
Heat exchanger				2Row 12Step	1Row 20Step	2Row 12Step	1Row 20Step	2Row 12Step	1Row 20Step	2Row 12Step	1Row 20Step	2Row 12Step	1Row 20Step	2Row 12Step	1Row 20Step
Refrigerant control unit				CAPILLARY TUBE		CAPILLARY TUBE		CAPILLARY TUBE		CAPILLARY TUBE		CAPILLARY TUBE		CAPILLARY TUBE	
Freezer oil capacity				280		280		360		360		410		410	
Refrigerant to change(R-22)				690		695		760		820		920		920	
Protection device				-	MST24AMN -12008	-	MST24AMM -12008	-	MRA12037 -12007	-	MRA12056 -12007	-	MRA12030 -12008	-	MRA98706 -12008	
Cooling test Condition				INDOOR UNIT : DB27°C WB19°C OUTDOOR UNIT : DB35°C WB24°C											
Heating test Condition				INDOOR UNIT : DB20°C OUTDOOR UNIT : DB7°C WB 6°C											
Maximum operation Condition				INDOOR UNIT : DB32°C WB22.5°C OUTDOOR UNIT : DB43°C WB25.5°C											

2-2 Dimensions

2-2-1 Indoor Unit

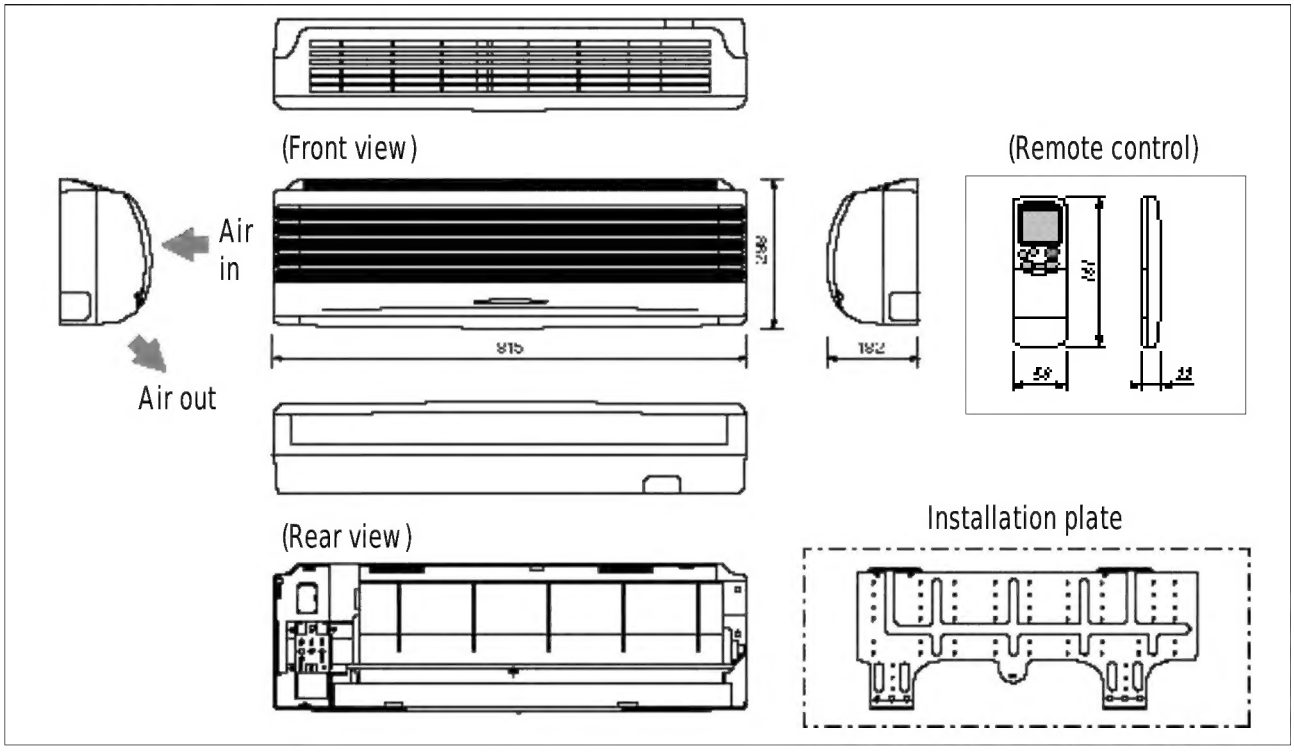

2-2-1 Outdoor Unit

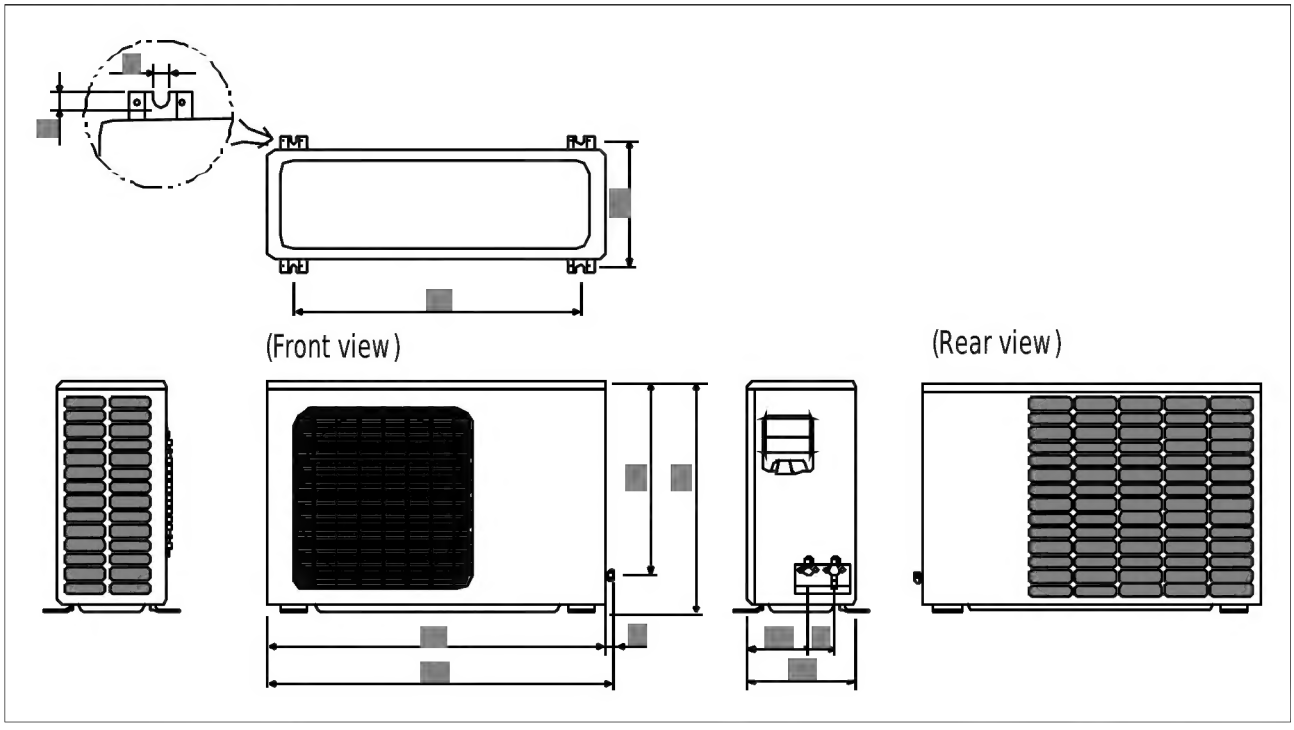

2-3 Low pressure & Current Data

Indoor Unit : ASH070VE/ASH071VE
ASH074VE/ASH075VE

Outdoor Unit : AXH070VE/AXH071VE
AXH074VE/AXH075VE

• Cooling characteristics

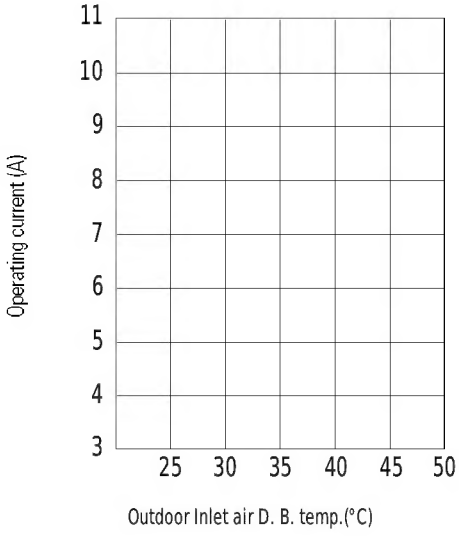

• Heating characteristics

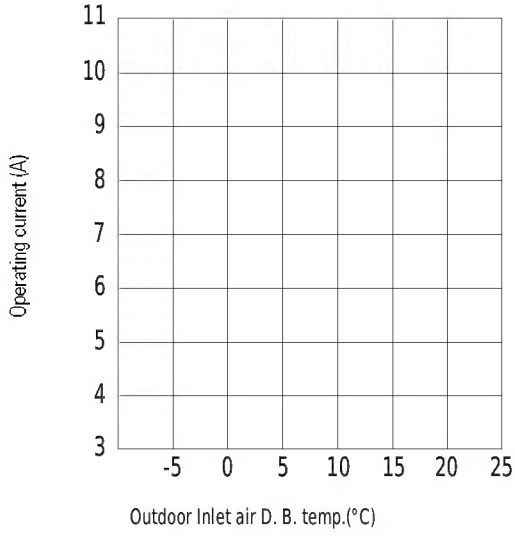

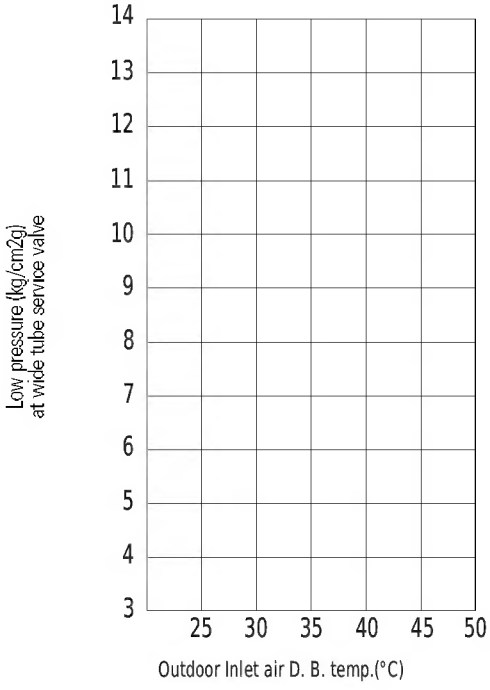

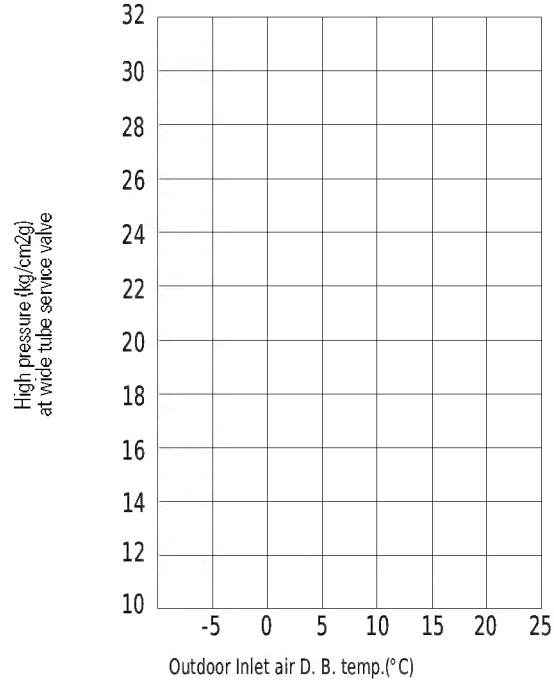

Indoor Unit : ASH070VD/ASH071VD
ASH074VD/ASH075VD

Outdoor : Unit AXH070VD/AXH071VD
AXH074VD/AXH075VD

• Cooling characteristics

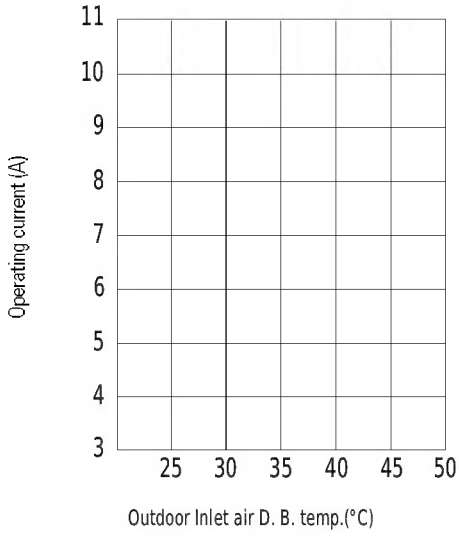

• Heating characteristics

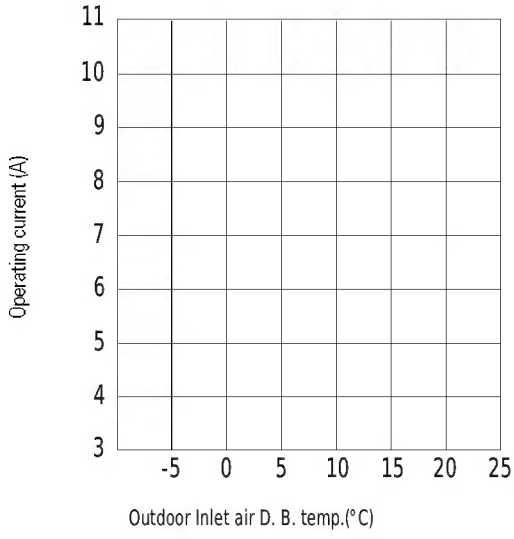

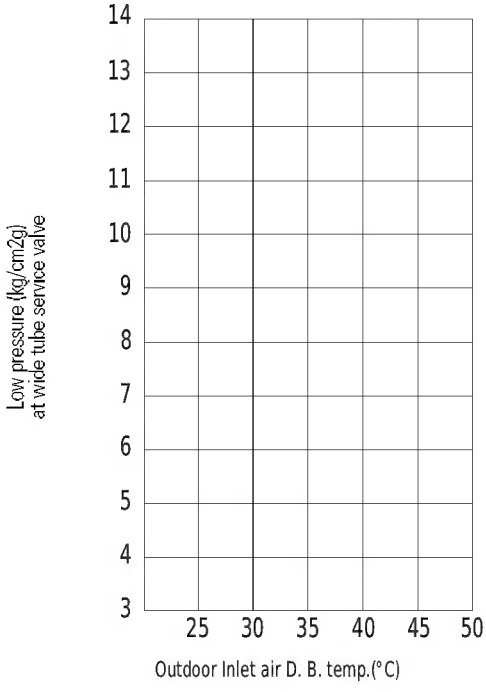

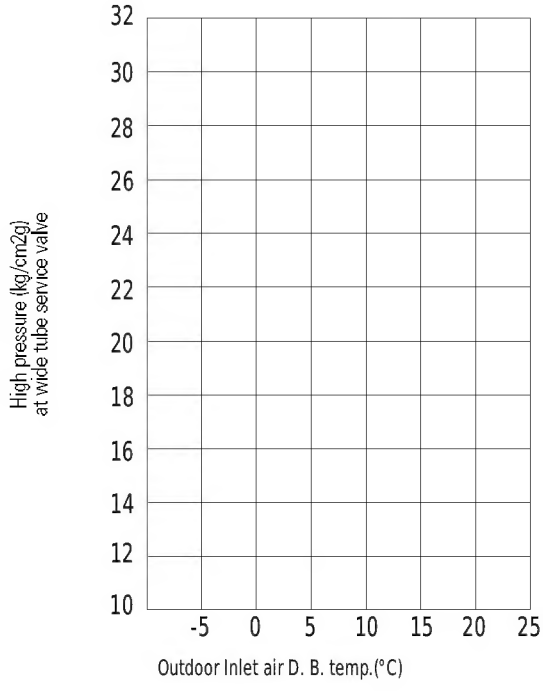

Indoor Unit : ASH090VE/ASH091VE
ASH094VE/ASH095VE

Outdoor : Unit AXH090VD/AXH091VE
AXH094VD/AXH095VE

• Cooling characteristics

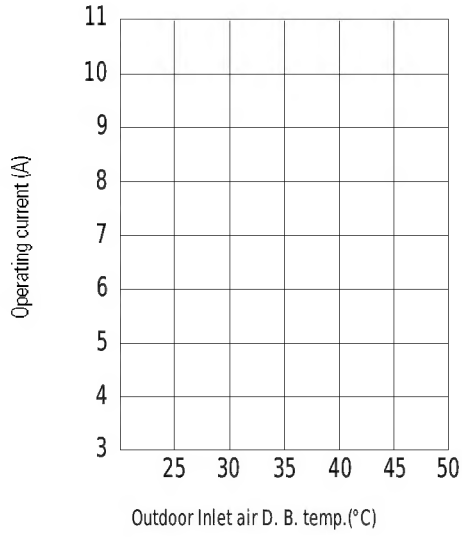

• Heating characteristics

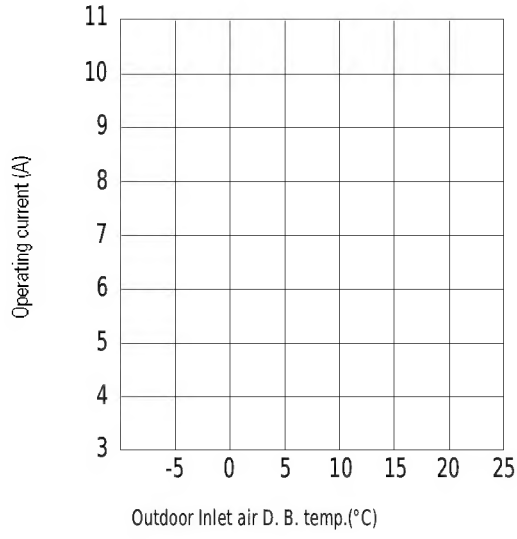

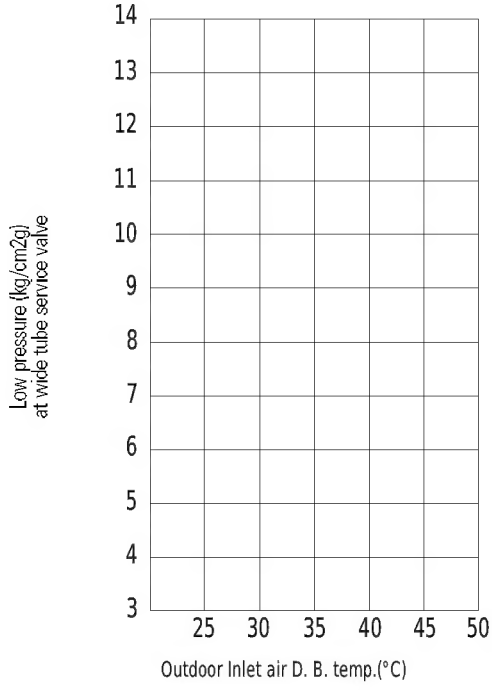

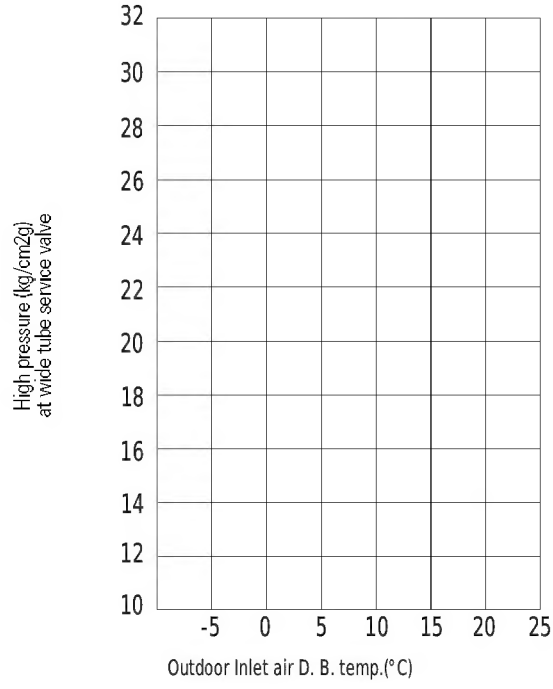

Indoor Unit : ASH090VD/ASH091VD
ASH094VD/ASH095VD

Outdoor Unit : AXH090VD/AXH091VD
AXH094VD/AXH095VD

• Cooling characteristics

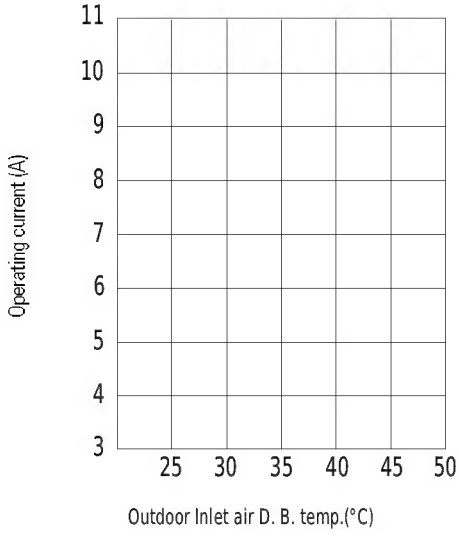

• Heating characteristics

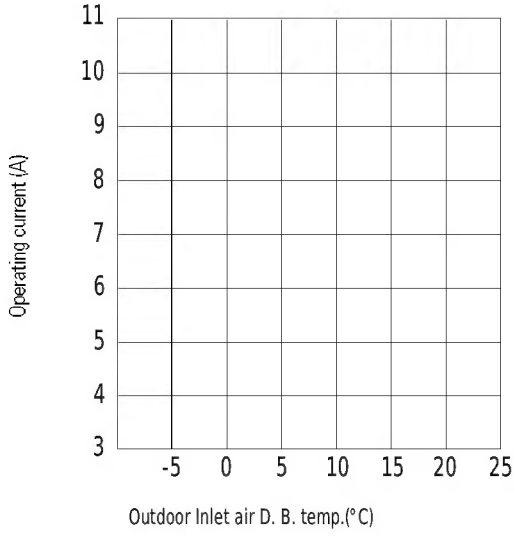

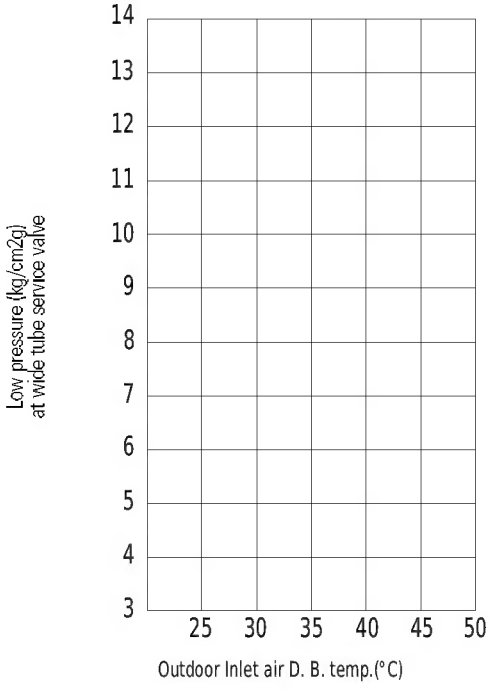

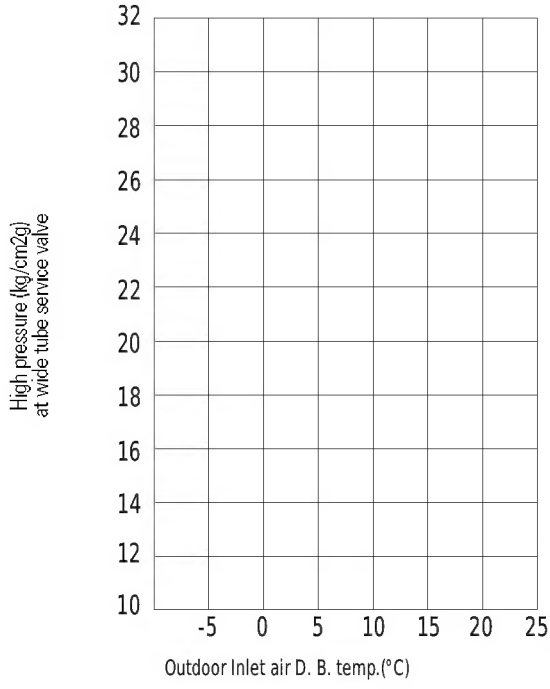

Indoor Unit : ASH120VE/ASH121VE
ASH124VE/ASH125VE

Outdoor Unit : AXH120VE/AXH121VE
AXH124VE/AXH125VE

• Cooling characteristics

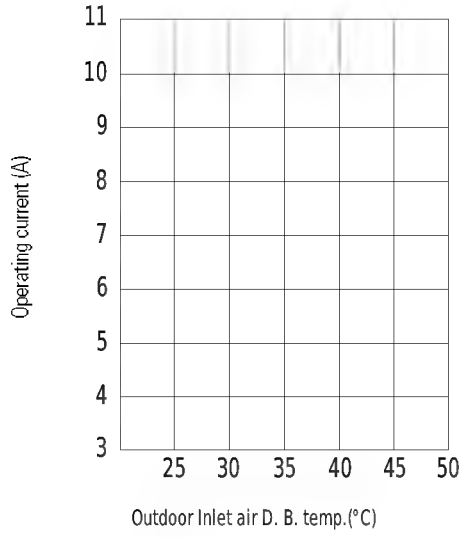

• Heating characteristics

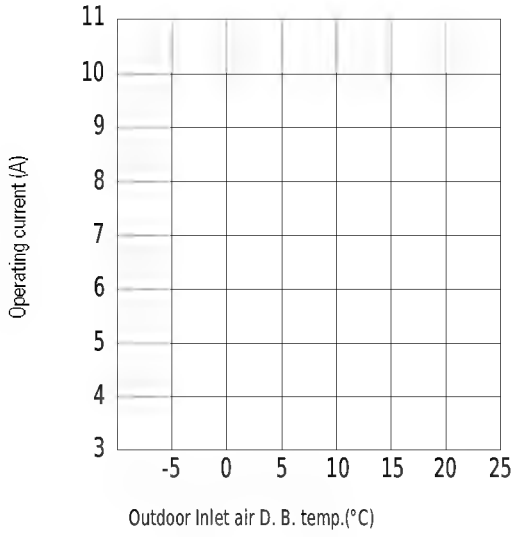

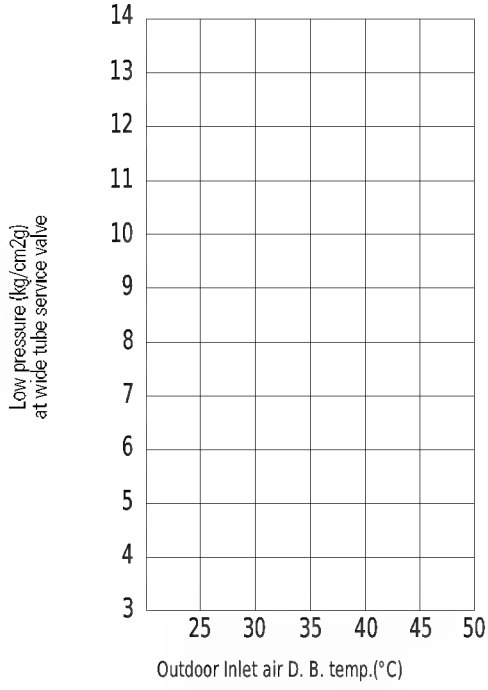

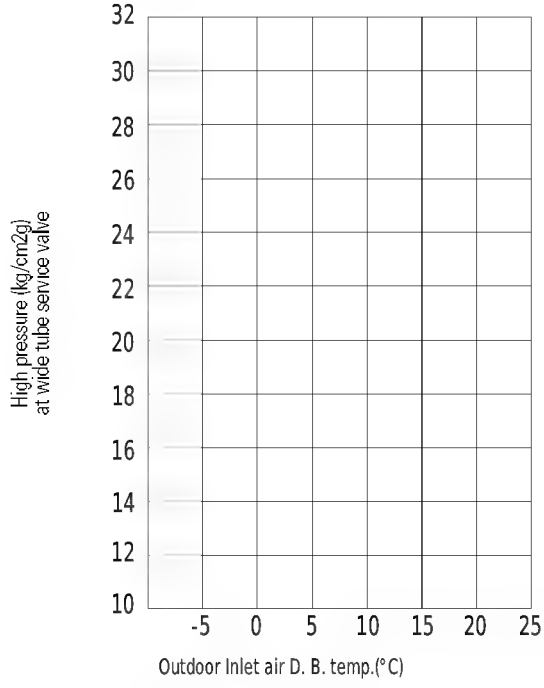

Indoor Unit : ASH120VD/ASH121VD
ASH124VD/ASH125VD

Outdoor Unit : AXH120VD/AXH121VD
AXH124VD/AXH125VD

• Cooling characteristics

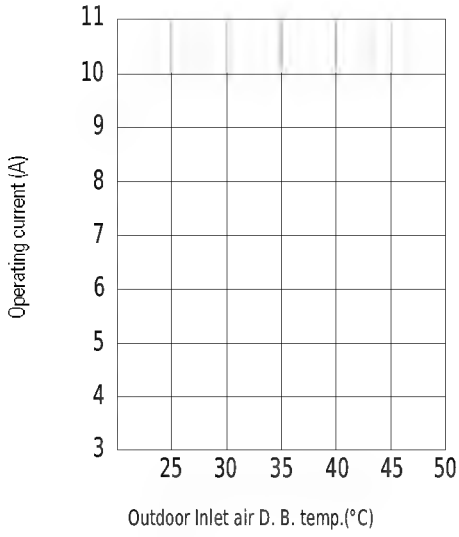

• Heating characteristics

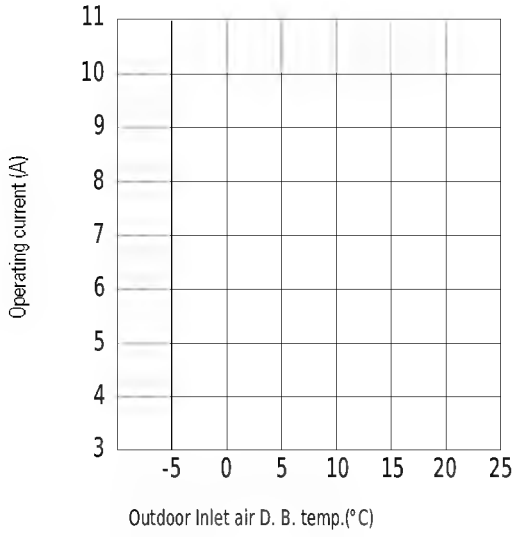

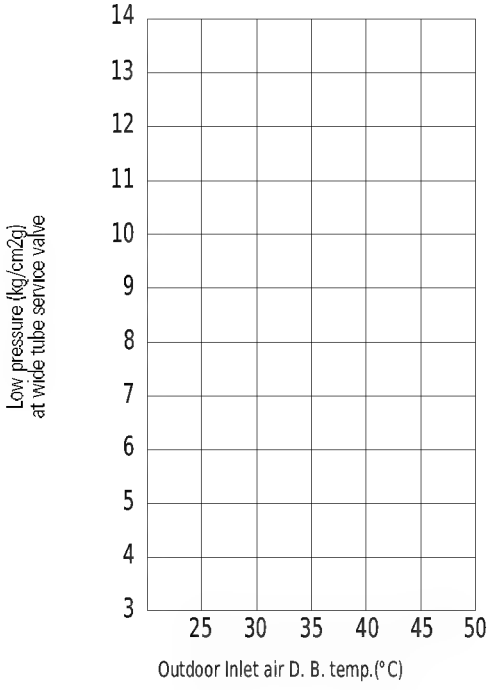

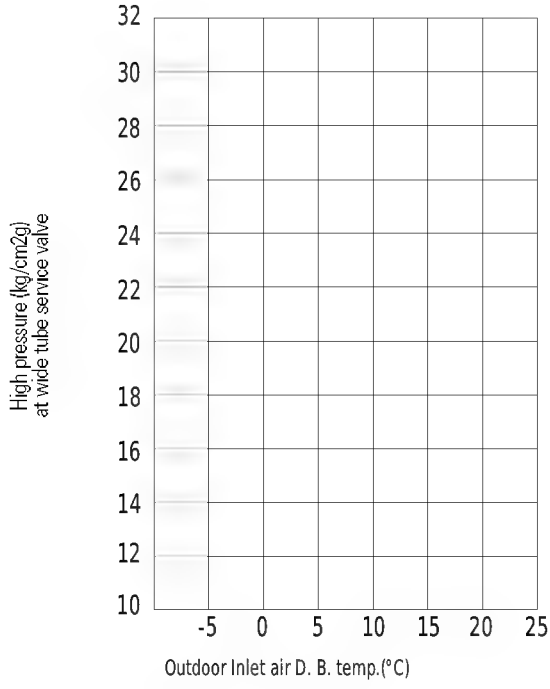

2-4 Refrigerating Cycle Block Diagram

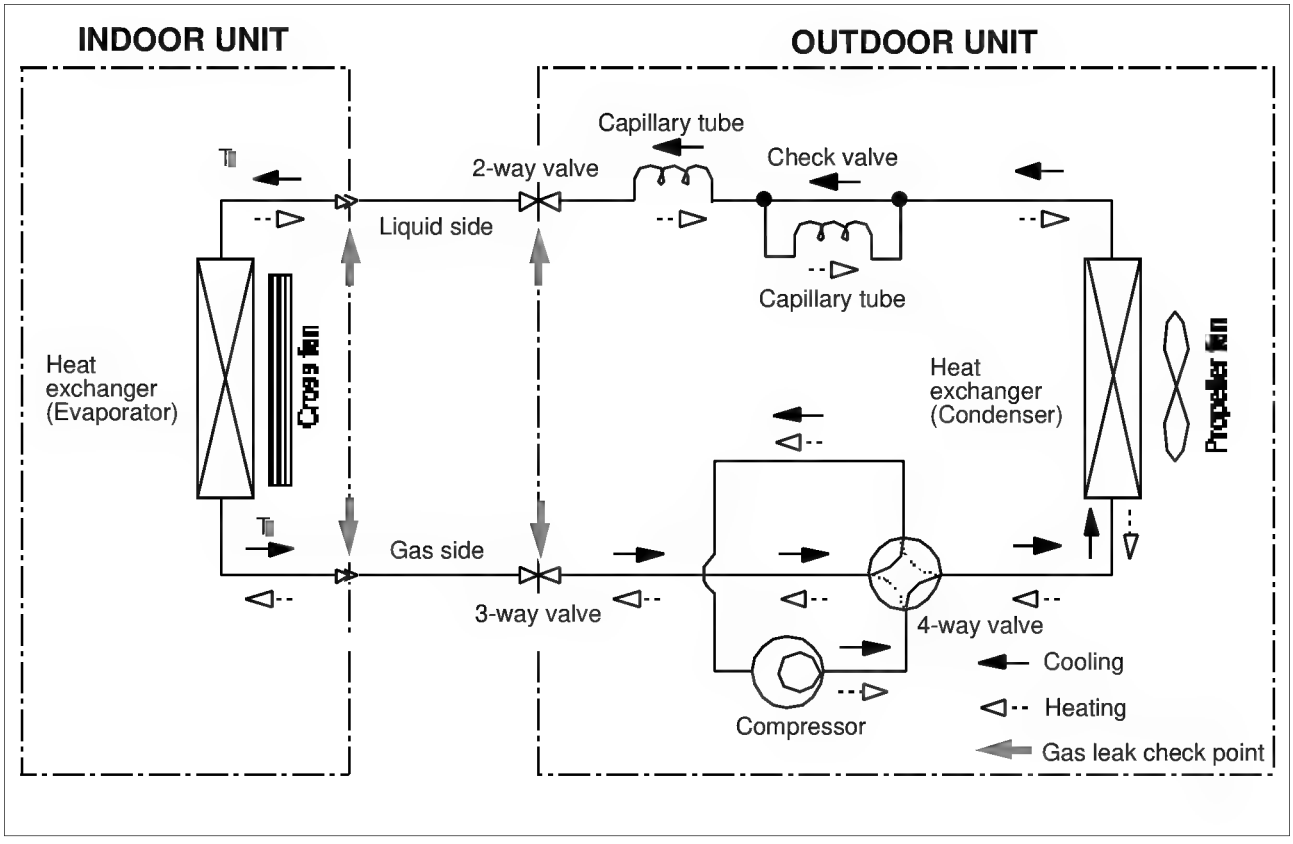

3. Operating Instructions and Installation

3-1 Operating Instructions

3-1-1 Name & Function of Key in remote controller

NO		NAMED OF KEY		FUNCTION OF KEY
1				On/Off Button. Use this button to start and stop air conditioner.
2			▲ (UP)	Temp. up button. If the ▲ button is pressed once, the setting temperature is increased by 1°C
			▼ (DOWN)	Temp. up button. If the ▼ button is pressed once, the setting temperature is decreased by 1°C
3		MODE		Each time you press this button, MODE is changed in the following order.
4		TURBO		Use this button to provide heavy duty cooling & Heating for 30 minutes.
5		OFF		Set up the reserve or cancel the timer on and timer off quickly
6				Use this button for sleep operation. (The SLEEP mode can be selected at COOL and HEAT mode.)
7				Adjusts air flow vertically. Each time you press this button, BLADE-H rotates by 10.58° (Changable range 42.3°)
8				Each time you press this button, FAN SPEED is changed in the following order.
9	COVER	TIMER	ON TIMER	Set up the time that operation start.
10			OFF TIMER	Set up the time that operation stop.
11			SET	Use this button to reserve the timer on.
12			CANCEL	Use this button to reserve or cancel the timer on and timer off.
13			(UP)	If the button is pressed once, the time increase by one minute during the time set mode, and ten minutes during the timer set mode.
14			(DOWN)	If the button is pressed once, the time decrease by one minute during the time set mode, and ten minutes during the timer set mode.
15			TIME	Without regard to ON/OFF condition in remote controller, use this button to set current time. Adjust the current time using button. (Data can be transmitted after setting up the time)

3-1-1 Name & Function of Key in remote controller

1. AUTO MODE : In this mode, operation mode(COOL, HEAT, DRY) is selected automatically by the room temperature of initial operation.

Room Temp	Operation Type
Tr≥ 21°C+ΔT	Cool Operation (Set Temp:AUTO SETTING)
21°C +ΔT>Tr	Heat Operation (Set Temp : 22°C+ΔT)

   ΔT= -1°, -2°C, 0°C+1°C+2°C
   ΔT is controlled by setting temperature up/down key of remote controller

2. COOL MODE : The unit operates according to the difference between the setting and room temperature. (18°C~30°C)

3. HEAT MODE : The unit operates according to the difference between the setting and room temperature.(16°C~30°C)
   *Prevention against cold wind : For about 3~5 minutes after initial operation, thermo control or "de-ice", the indoor fan will either not operate or operate very slowly(510 rpm), then switch to the selected fan speed. This period is to allow the indoor unit's heat-exchanger to prewarm before emitting warm air.
   *High temperature release function : The outdoor unit for and compressor ON/OFF control for safety operation, when the overheat is heat exchanger of indoor unit.
   *De-ice : Deicing operation is controlled by indoor unit's heat exchanger temperature and accumulating time of compressor's operation.
   De-ice end by sensing of the processing time by de-ice Condition.

4. DRY MODE : Has 3 states, each determined by room temperature.
   The unit operates in DRY mode.
   *Compressor ON/OFF Time is controlled compulsorily(can not set up the fan speed, always breeze).
   *Protective function : Low temperature release. (Prevention against freeze)

5. TURBO MODE : This mode is available in AUTO, COOL, HEAT, DRY, FAN MODE.
   When this button is pressed at first, the air conditioner is operated "powerful" state for 30 minutes regardless of the set temperature, room temperature.
   When this button is pressed again, or when the operating time is 30 minutes, turbo operation mode is canceled and returned to the previous mode.
   *But, if you press the TURBO button in DRY or FAN mode that is changed with AUTO mode automatically.

6. SLEEP MODE : Sleep mode is available only in COOL or HEAT mode.
   The operation will stop after 6 hours.
   *In COOL mode : The setting temperature is automatically raised by 1°C each 1hour When the temperature has been raised by total of 2°C, that temperature is maintained.
   *In HEAT mode : The setting temperature is automatically droped by 1°C each 1hour. When the temperature has been droped by total of 2°C, that temperature is maintained.

7. FAN SPEED : Manual (3 step), Auto (4 step)
   Fan speed automatically varies depending on both the difference between setting and the room temperature.

8. COMPULSORY OPERATION :
   For operating the air conditioner without the remote controller.
   *AUTO : The operating is the same function that AUTO MODE in the remote controller.

9. SWING : BLADE-H is rotated vertically by the stepping motor.
   *Memory louver : When ON/OFF button is pressed at stop state, the BLADE-H returns to its original location which is operating state before stop
   *Swing auto : The BLADE-H can rotate within about 10,500 in the original position set by the SWING SET button.
   *Swing Set : Press the utton under the remote control is disp..y ..d on LCD the and the blades move up and down, about ..
   If the one more time press the utton, blatles location is stop.

10. Quick OFF TIMER: OFF timer (quick timer) allows reservation or cancel the timer on and timer off quickly
    When OFF timer button is pressed at operating state, LCD displays the polling state sequentially.
    The LCD also displays the time remaining.

11. 24-Hour ON/OFF Real Setting Timer. : The air conditioner is turned ON at a specified time using ON TIMER.
    OFF TIMER : The air Conditioner is turned OFF at a specified time using OFF TIMER.
    *ON TIMER : Only timer LED lights on.
    *OFF TIMER : Both timer and operation LED lights on.
    *3 minutes delay timer.

14. SELF Diagnosis

LED DISPLAY				Check Point
operation	TIMER	FAN	Turbo	
■	○	○	○	Interruption of electric power and Power on.
○	■	○	○	Abnormal condition of the room sensor.
■	■	○	○	Abnormal condition of the indoor unit's heat exchanger sensor.
○	○	■	○	Indoor unit fan motor lock.

■ : LED blinking ○ : LED off

15. TIME SHORTENING : If the "Time short" connector pin is shorted on the main P. C. B, the compressor's three minutes delay function is cancelled, and each operation time is shortened to one fiftieth of its original time.

16. BUZZER SOUND : Whenever the ON/OFF button is pressed or whenever change occurs to the condition which is set up or select, the compulsory operation mode, buzzer is sounded "beep"

3-2 Installation

3-2-1 Selecting Area for Installation

Select an area for installation that is suitable to the customer's needs.

3-2-1(a) Indoor Unit

1. Make sure that you install the indoor unit in an area providing good ventilation. It must not be blocked by an obstacle affecting the airflow near the air inlet and the air outlet.
2. Make sure that you install the indoor unit in an area allowing good air handling and endurance of vibration of the indoor unit.
3. Make sure that you install the indoor unit in an area where there is no source of heat or vapor nearby.
4. Make sure that you install the indoor unit in an area from which hot or cool air is spread evenly in a room.
5. Make sure that you install the indoor unit in an area away from TVs, audio units, cordless phones, fluorescent lighting fixtures and other electrical appliances (at least 1 meter).
6. Make sure that you install the indoor unit in an area which provides easy pipe connection with the outdoor unit, and easy drainage for condensed water.
7. Make sure that you install the indoor unit in an area which is large enough to accomodate the measurements shown in figure on the next page.

3-2-1(b) Outdoor Unit

1. Make sure that you install the outdoor unit in area not exposed to the rain or direct sun light.
   (Install a separate sunblind if exposed to direct sun light.)
2. Make sure that you install the outdoor unit in area allowing good air moment, not amplifying noise or vibration, especially to avoid disturbing neighbours.
   (Fix the unit firmly if it is mounted in a high place.)
3. Make sure that you install the outdoor unit in area providing good ventilation and which is not dusty. It must not be blocked by any obstacle affecting the airflow near the air inlet and the air outlet.
4. Make sure that you install the outdoor unit in area free from animals or plants.
5. Make sure that you install the outdoor unit in area not blocking the traffic.
6. Make sure that you install the outdoor unit in area easy to drain condensed water from the indoor unit.
7. Make sure that you install the outdoor unit in area which provides easy connection within the maximum allowable length of a coolant pipe(15 meters).

   Note
   1. Add 10 grams of refrigerant (R-22) for every 1 meter if the pipe length exceeds the standard pipe length of 5 meters.
   2. Maintain a height between the indoor and outdoor units of less than 3 meters.
8. Make sure that you install the outdoor unit in an area which is large enough to accommodate the measurements shown in figure on the next page.

3-2-1(c) Remote Control Unit

1. Make sure that you install the remote control unit in an area free from obstacles such as curtains etc, which may block signals from the remote control unit.
2. Make sure that you install the remote control unit in an area not exposed to direct sunlight, and where there is no source of heat.
3. Make sure that you install the remote control unit in an area away from TVs, audio units, cordless phones, fluorescent lighting fixtures and other electrical appliances (at least 1 meter).

Caution :
It is harmful to the air conditioner if it is used in the following environments: greasy areas (including areas near machines), salty areas such as coast areas, areas where sulfuric gas is present such as hot spring areas. Contact your dealer for advice.

3-2-2 Installation diagram of indoor unit and outdoor unit

A Indoor unit gas leak test check point

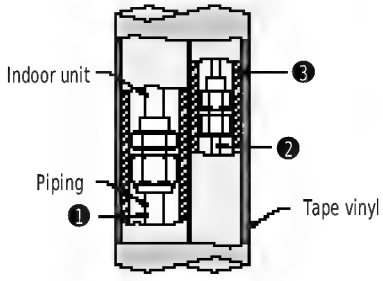

Piping may be laid to the rear, left, right or down .

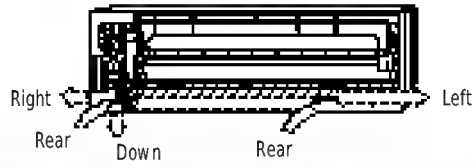

B Drain hose installation

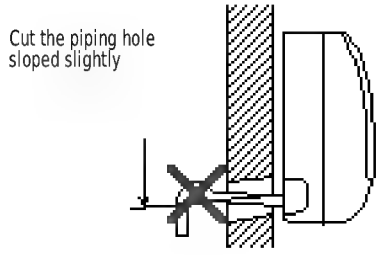

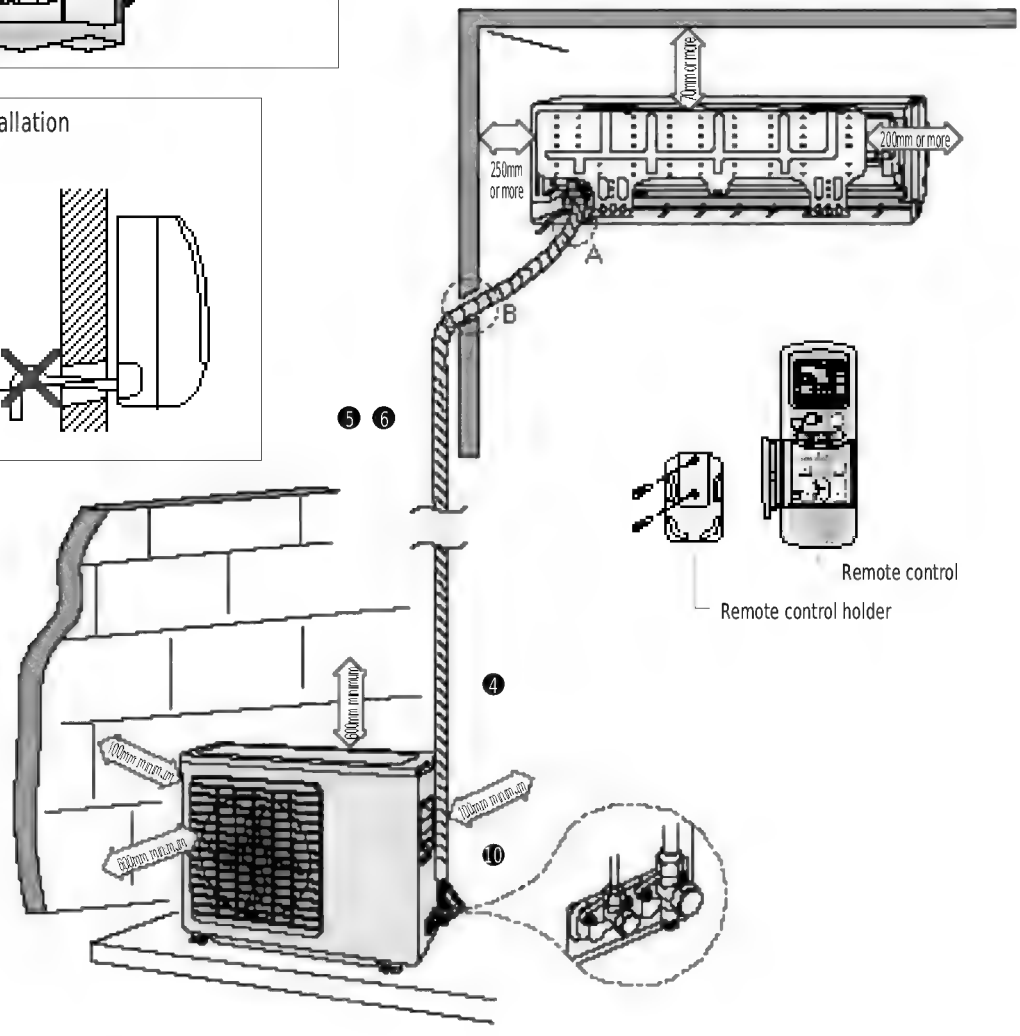

❶	Piping (Liquid) 1/4"		❻	Clamper tube
❷	7K/9K BTU 12K BTU	Piping(Gas)3/8" Piping(Gas)1/2"	❼	Installation plate
❸	Installation tube		❽	Pipe-connection
❹	Vinyl tape		❾	Screw
❺	Putty		❿	Drain hose

3-2-2(a) Fixing the Installation Plate

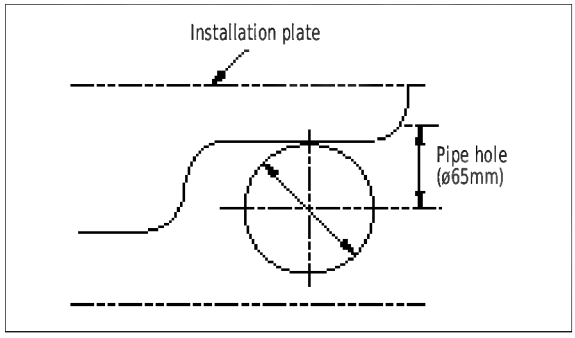

1. Determine the position of the pipe and drain hose hole using the right figure and drill the hole with an inner diameter of 65mm so that it slants slightly downwards.

2. **If you are fixing the indoor unit to a… Then follow Steps…**

Wall	**3.**
Window frame	**4 to 6.**

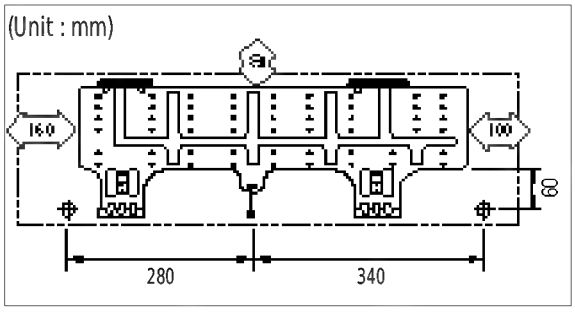

3. Fix the installation plate to the wall in a manner appropriate to the weight of the indoor unit.

   If you are mounting the plate on a concrete wall with anchor bolts, the anchor bolts must not project by more than 20mm.

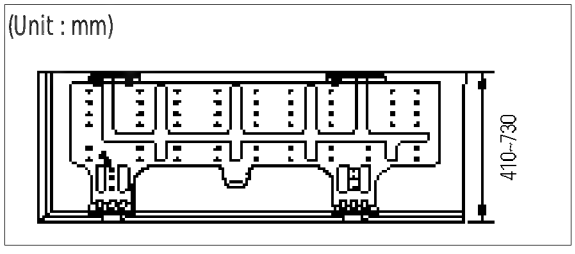

4. Determine the positions of the wooden uprights to be attached to the window frame.

5. Attach the wooden uprights to the window frame in a manner appropriate to the weight of the indoor unit.

6. Using tapped screws, attach the installation plate to the wooden uprights, as illustrated in the last figure opposite.

3-2-2(b) Purging the Unit

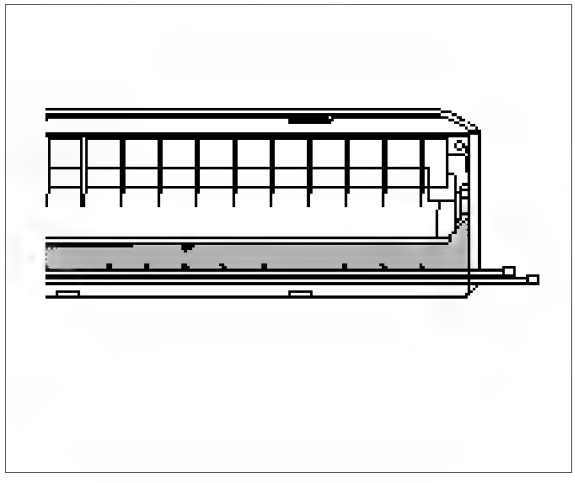

On delivery, the indoor unit is loaded with an inert gas. All this gas must therefore be purged before connecting the assembly piping. To purge the inert gas, proceed as fol - lows.

Unscrew the caps at the end of each pipe.

Result : All inert gas escapes from the indoor unit.

- **To prevent dirt or foreign objects from getting into the pipes during installation, do NOT remove the caps completely until you are ready to connect the piping.**

3-2-2(c) Connecting the Assembly Cable.

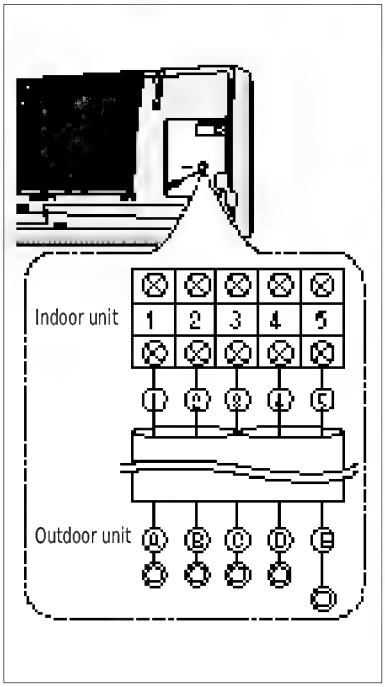

The outdoor unit is powered from the indoor unit via the assembly cable. If the outdoor unit is more than five metres away from the indoor unit, the cable must first be extended to a maximum of ten metres.

1. Extend the assembly cable if necessary.
2. Open the front grille by pulling on the tabs on the lower right and left sides of the indoor unit.
3. Remove the screw securing the connector cover.
4. Pass the assembly cable through the rear of the indoor unit and connect the assembly cable to terminals 1 to 5.
   - Each wire is labelled with the corresponding terminal number.
5. Firmly fix the ass'y cable with clamp wire holder.
6. Pass the other end of the cable through the 65mm hole in the wall.
7. Replace the connector cover, carefully tightening the screw.
8. Close the front grille.
9. For further details on how to plug the other end of the assembly cable into the outdoor unit, refer to page 12.

3-2-2(d) Installing and Connecting the Indoor Unit Drain Hose

Care must be taken when installing the drain hose for the indoor unit to ensure that any condensa - tion water is correctly drained outside.l When passing the drain hose through the 65mm hole drilled in the wall, check that none of the following situations occur.



The hose must NOT slope upw ards.



The end of the drain hose must NOT be placed in water.



Do NOT bend the hose in different directions.



Keep a clearance of at least 5cm between the end of the hose and the ground.



Do NOT place the end of the drain hose in a hollow.

To install the drain hose, proceed as follows.

1. If necessary, connect the 2-metre extension to the drain hose.
2. If you are using the extension, insulate the inside part of the extension drain hose with a shield.
3. Pass the drain hose under the refrigerant piping, taking care to keep the drain hose tight.
4. Pass the drain hose through the hole in the wall, making sure that it is sloping downwards, as shown in the illustrations above.

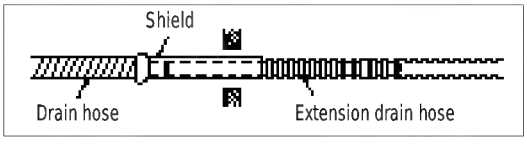

The hose will be fixed permanently into position once the whole installation has been tested for gas leaks; refer to page 16 for further details.

3-2-2(e) Outdoor unit installation

Wiring connection

1. Remove the cover-E parts.
2. Firmly connect the cable connector in the terminal block.
3. Fasten the M4 ring terminal to the hole marked
4. Firmly fix the ass'y cable with clamp wire holder.
5. Assemble the cover-E parts.
6. To prevent the entry of water, form a trap of the ass'y cable as illustrated in the installation diagram of indoor and outdoor unit.

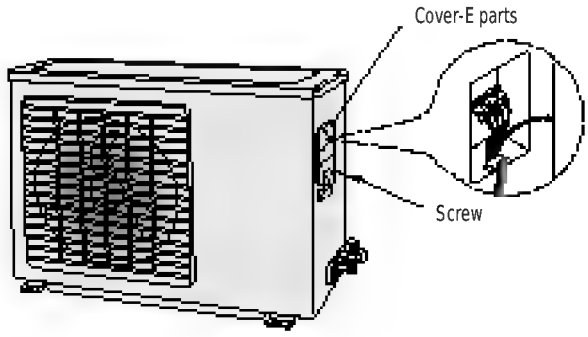

Installation of drain line

In heating and de-ice operation, condensed water may be generated.
Install drain line as following procedure.

1. Close Hole Ⓒwith Cap Drain A.
2. Close Hole Ⓑwith Cap Drain B.
3. Insert Drain plug into HoleⒶ, and then connect drain hose to drain plug.

• Inside diameter of drain hose is 18mm.

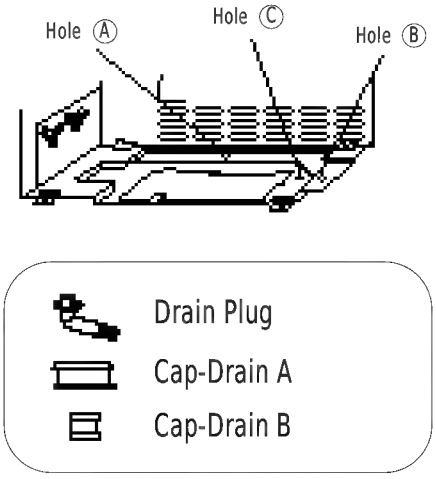

3-2-2(f) Flare Modification

• Tools used

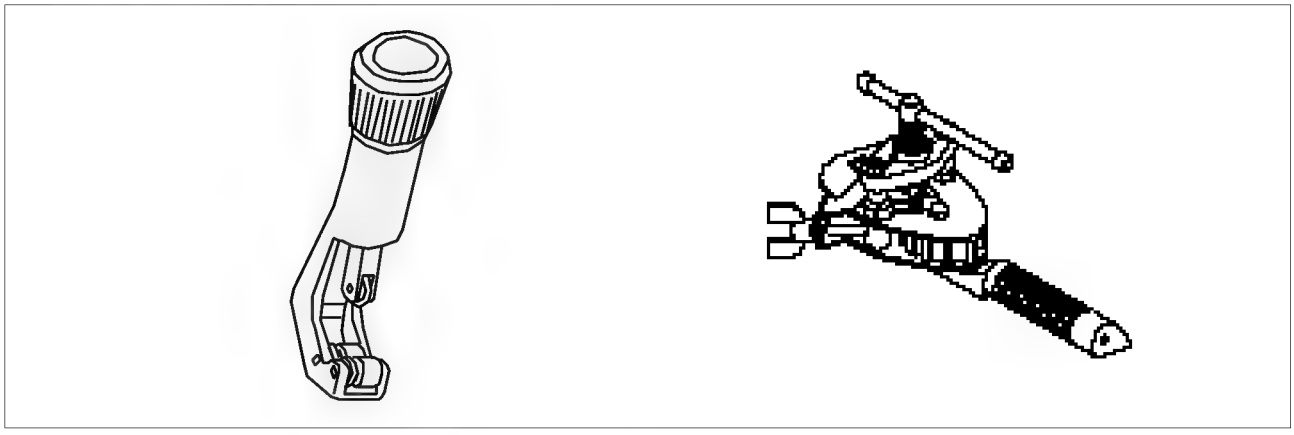

Flare modification procedure

1) Cut the pipe using a pipe cutter.

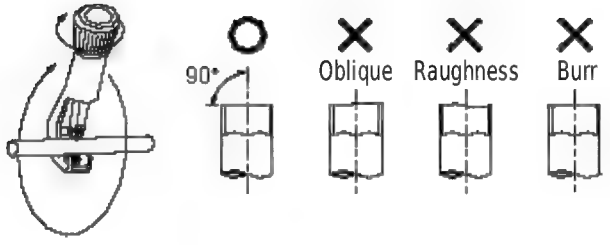

2) Remove burrs at the tip of the pipe cut.

Caution : Burrs not removed may result in leakage of gas.

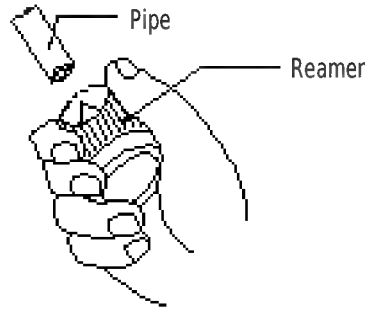

3) Insert a flare nut into the pipe and modifty flare.

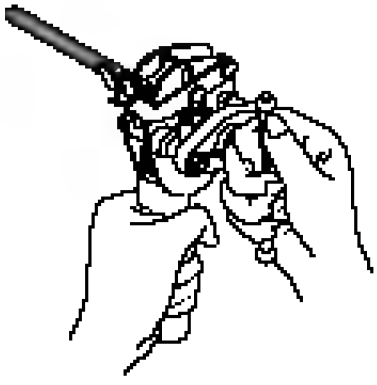



Outer diameter	A(mm)
ø6.35mm	1.3
ø9.52mm	1.8
ø12.7mm	2.0

* Unproper flaring

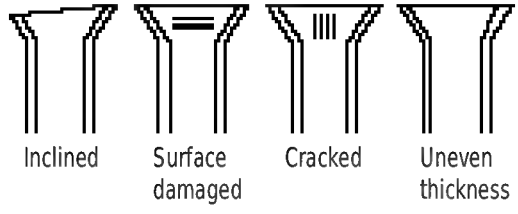

3-2-2(g) Air-Purge Procedure

• Use the refrigerant of the outdoor unit to purge air inside indoor unit and pipe.

1. Remove the caps from the 2-way valve(B) and the 3-way valve(A).

↓

2 Turn the 2-way valve cock approx. 45° counterclockwise to open it. Close it about 10 seconds later.

↓

3 Check refrigerant leakage of each joint parts (A, B, C & D in right figure)

↓

not leaking

Leaking

If leaking, tighten the flare nut one more time. If continues to leak, although the pipe fixing area has been tightened again, repair the leaking area.

4. Open the 2-way valve again.

↓

5. Open the service valve cap of the 3-way valve and press the needle valve to discharge gas for 3 seconds and leave it for about 1 minute.
Repeat the above procedure for 3 times to purge air.

↓

6. Open the 2-way valve and 3-way valve completely

↓

7. Close the cap of each valve.

↓

8. Check each valve for leakage.

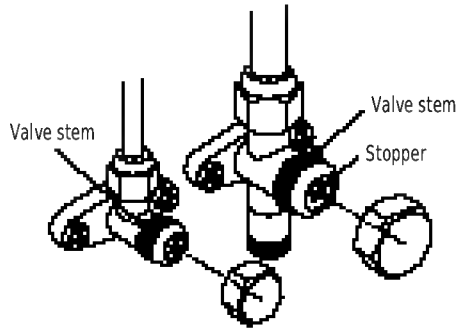

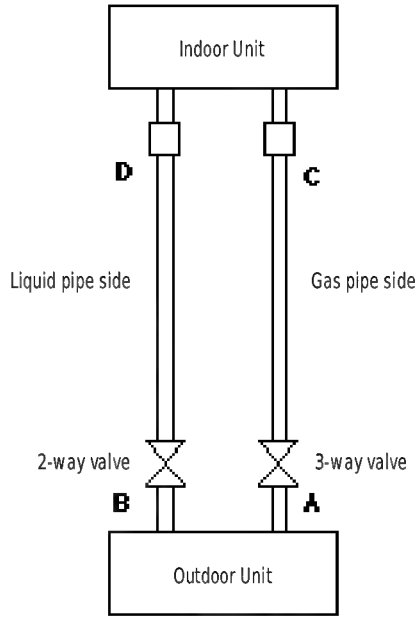

3-2-2(h) Refrigerant Refill

• Refill an air-conditioner with refrigerant when refrigerant has been leaked at installing or using

1. Purge air(for new installation only).

↓

2. Turn the 3-way valve clockwise to close, connect the pressure gauge(low pressure side) to the service valve, and open the 3-way valve again.

↓

3. Connect the tank to refill with Refrigerant

↓

4. Set the unit to cool operation mode.

↓

5. Check the pressure indicated by the pressure gauge(low pressure side).
   * Standard pressure is should be 4.5~5.5kg/cm² in a regular, high operation mode.

↓

6. Open the refrigerant tank and fill with refrigerant until the rated pressure is reached.
   * It is recommended not to pour the refrigerant in too quickly, but gradually while operating a pressure valve.

↓

7. Stop operation of the air conditioner.

↓

8. Close the 3-way valve, disconnect the pressure gauge, and open the 3-way valve again.

↓

9. Close the cap of each valve.

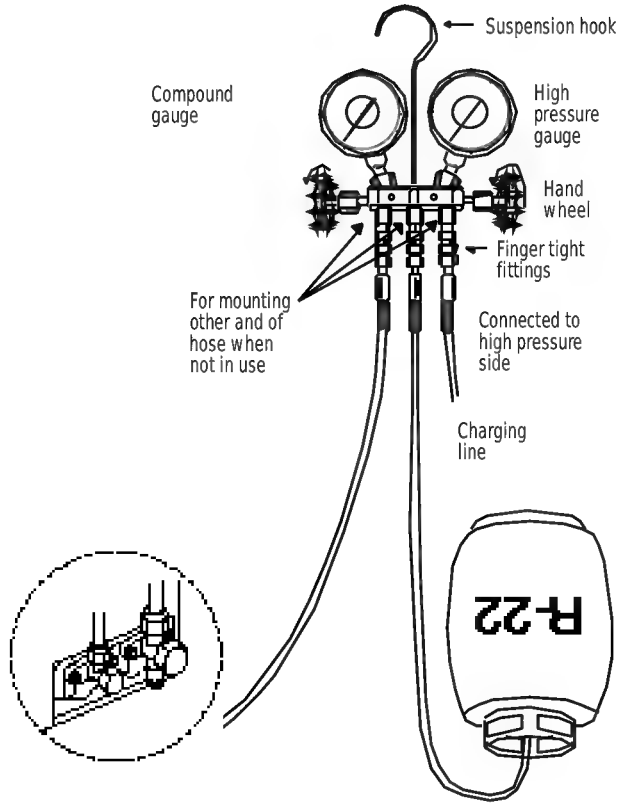

3-2-2(i) Refrigerant Adjustment

Class	At installation		At service	
Connection Pipe Length	Air-Purge Method	Refrigerant Adjustment	Air-Purge Method	Refrigerant Quantity
5m Max.	Refer to the detailed Air-Purge Procedure	Unnecessary	Purge air using a vaccum pump or an additional refrigerant cylinder.	refer to specification sheet
5~10m		Add 10g of refrigerant (R-22) for every 1m.		Add 10g of refrigerant (R-22) for every 1m.

3-2-2(j) Flare unt fixing torque

Outter diameter	Torque (kg-cm)	
	Fixing Torque	Final Torque
ø 6.35 (9000Btu, 12000Btu) (Liquid Side)	160	200
ø 9.52 (9000Btu) (Gas Side)	300	350
ø 12.7 (12000Btu) (Gas Side)	500	550

3-2-2(k) "Pump down" Procedure

- Pump down' shall be carried out when an evaporator is replaced or when the unit is relocated in another area.

1. Remove the caps from the 2-way valve and the 3-way valve.
2. Turn the 3-way valve clockwise to close and connect a pressure gauge(low pressure side) to the service valve, and open the 3-way valve again.
3. Set the unit to cool operation mode. (Check if the compressor is operating.)
4. Turn the 2-way valve clockwise to close.
5. When the pressure gauge indicates "0" turn the 3-way valve clockwise to close.
6. Stop operation of the air conditioner.
7. Close the cap of each valve.

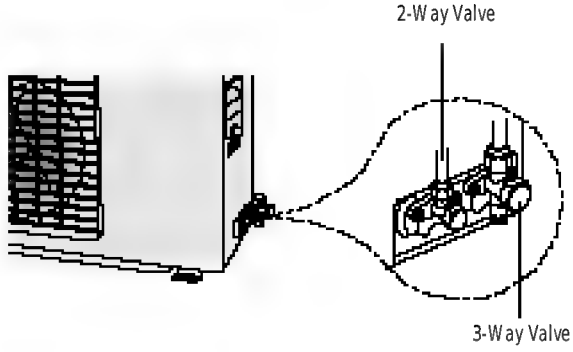

Relocation of the air conditioner

- Refer to this procedure when the unit is relocated.

1. Carry out the pump down procedure (refer to the details of 'pump down').
2. Remove the power cord.
3. Disconnect the assembly cable from the indoor and outdoor units.
4. Remove the flare nut connecting the indoor unit and the pipe.
   At this time, cover the pipe of the indoor unit and the other pipe using a cap or vinyl plug to avoid foreign material entering.
5. Disconnect the pipe connected to the outdoor unit.
   At this time, cover the valve of the outdoor unit and the other pipe using a cap or vinyl plug to avoid foreign material entering.
6. Make sure you do not bend the connection pipes in the middle and store together with the cables.
7. Move the indoor and outdoor units to a new locatioon.
8. Remove the mounting plate for the indoor unit and move it to a new location.

MEMO

4. Disassembly and Reassembly

Stop operation of the air conditioner and remove the power cord before repairing the unit.

4-1 Indoor Unit

No	Parts	Procedure	Remark
1	Front Grille	1) Stop the air conditioner operation and block the main power. 2) Seperate tape of front panel upper.	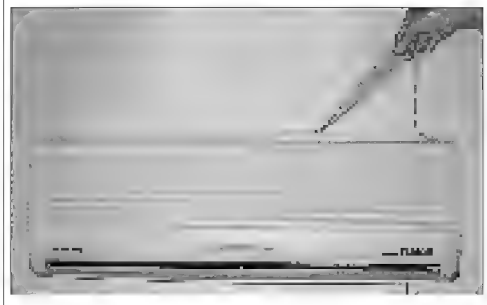
		3) Contract the second finger to the left, and right handle and pull to open the inlet grille. 4) Take the left and right filter out. * Take the Deadorizing and Electrostatic filter out. (ONLY "1" and "5" Series models) 5) Loosen one of the right fixing screw and seperate the terminal cover.	
		6) Loosen two fixing screws of front grille.	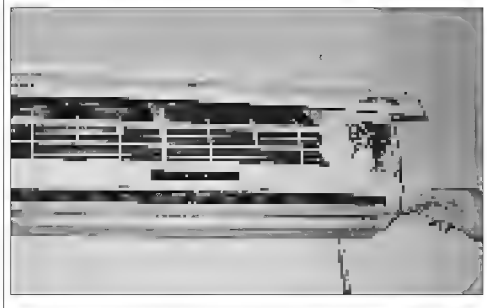
		7) Pull the upper left and right of discharge softly for the outside cover to be pulled out.	
		8) Pull softly the lower part of discharge and push it up. **Caution;** Assemble the front panel and fix the hooks of left and right.	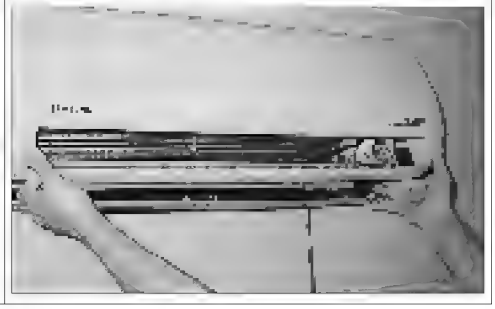

No	Parts	Procedure	Remark
2	Ass'y Tray Drain.	1) Do "1", above. Separate the drain hose from the extension drain hose. 2) Take the display PCB out. (Center of indoor unit) 3) Loosen three fixing screws of left and right 4)Pull tray drain out from the back body.	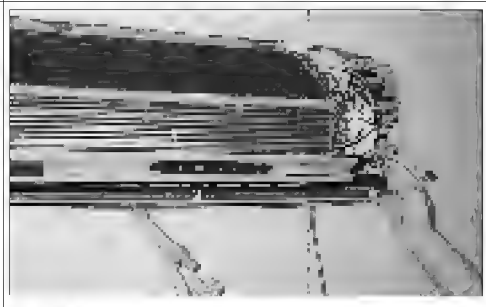
3	Electrical Parts (Main PCB)	1) Do "1", "2", above 2) Take all the connector of PCB upper side out. (Inclusion Power cord) 3) Separate the outdoor unit connection wire from the terminal block. 4) If pulling the Main PCB up. it will be taken out. (Separate the TRANS hook. it before).	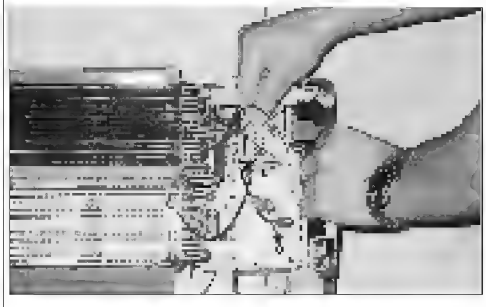
4	Heat Exchanger	1) Do "1" and "2", "3", above 2) Loosen two fixing earth screws of right side. 3) Separate the connection pipe. 4) Separate the bush body at the upper side and holder at the rearside. 5) Loosen the two fixing screws of left side. 6) Lifting the heat exchanger up a little to push the up side for separation from the indoor unit.	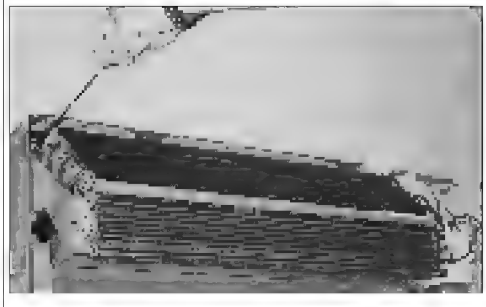 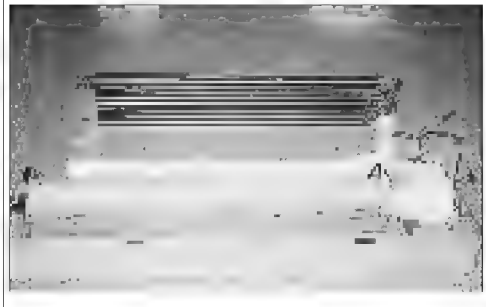

No	Parts	Procedure	Remark
3	Fan Motor and Cross Fan	1) Do "1" "2" "3" "4", above. 2) Loosen the fixing three screws and separate the motor holder. 3) Loosen the fixing screw of fan motor. (By use of M3 wrench) 4) Separate the fan motor from the fan. 5)Separate the fan from the left holder bearing.	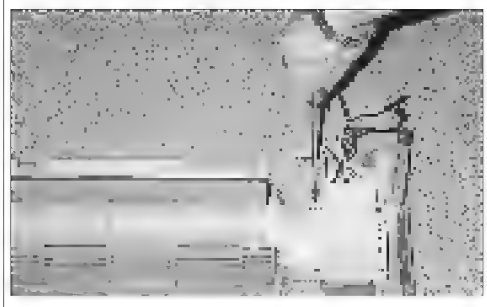 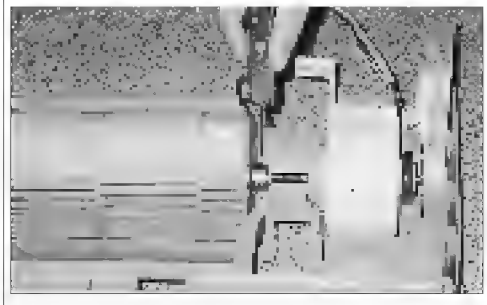

4-2-2 HORIZONTAL TYPE

No	Parts	Procedure	Remark
1	Common Work	1) Loosen the fixing screw and separate the cover E-parts. 2) Separate the connection wire from the terminal block.	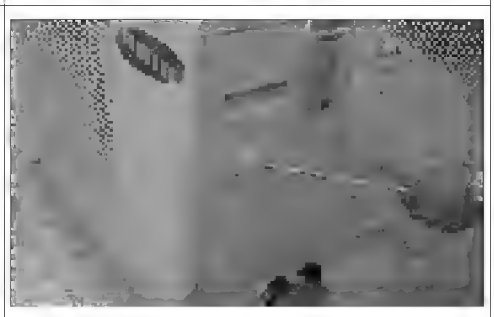
		3) Loosen three fixing screws and separate the upper cabinet.	
		4) Loosen the two fixing screws of Ass'y E-part.	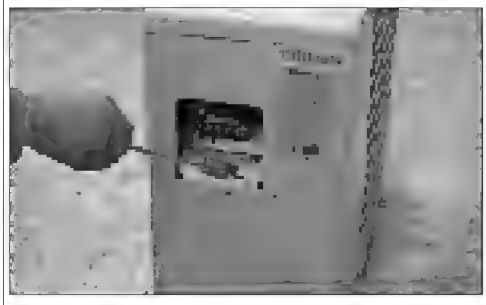
		5) Loosen seven fixing screws and separate the side cabinet.	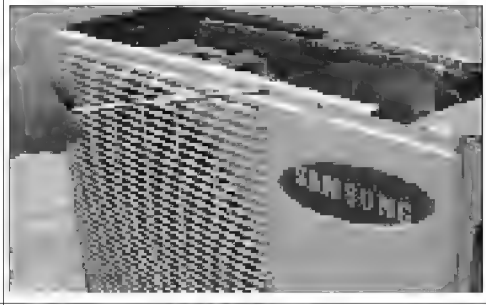
2	Fan and Motor	1) Do "1", above. 2) Loosen two fixing screw, of the front cabinet. 3) Push the brackets of the outer cover to separate the protection mesh from the rear side of front cabinet.	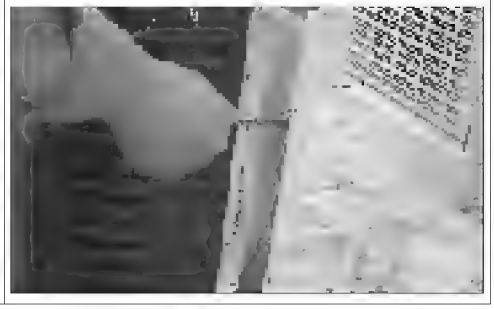

No	Parts	Procedure	Remark
		4) Remove the nut flange (Turn to the right to remove, as it is a left hand screw) 5) Separate the fan. 6) Loosen four fixing screws to separate the motor.	 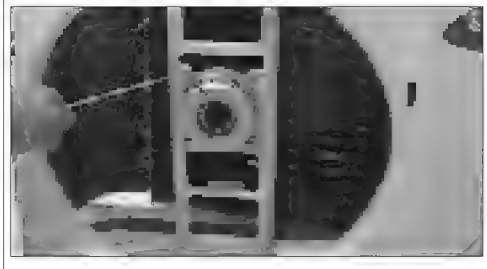 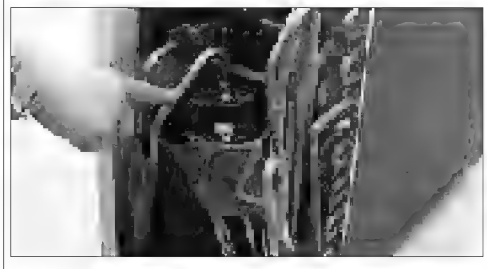
3	Heat Exchanger	1) Do "1", above. 2) Loosen three fixing screws of left and right side. 3) Disassemble the inlet and outlet pipe by welding. 4) Separate the heat exchanger.	
4	Compressor	1) Do "1", above. 2) Open the terminal cover of compressor and unscrew the connection terminal. 3) Disassemble the inlet and outlet pipe of compressor by welding. 4) Disassemble the inlet and outlet pipe of condenser by welding 5) Loosen the three bolts of the lower part. 6) separate the compressor.	

5. Troubleshooting

5-1 Items to be checked first

1) Is the voltage of the power correct?
The input voltage shall be 198-264VAC.
The airconditioner may not operate properly if the voltage is out of this range.

2) Is the link cable linking the indoor unit and the outdoor unit linked properly?
The indoor unit and the outdoor unit shall be linked by 5 cables.
Check the terminals if the indoor unit and outdoor unit are properly linked by the same number of cables.
Otherwise the airconditioner may not operate properly.

3) When a problem occurs due to the contents illustrated in the table below it is a symptom not related to the malfunction of the airconditioner.

NO	Operation of air conditioner	Explanation
1	The COOL operation indication LED (Green) blinks when a power plug of the indoor unit is plugged in for the first time.	It indicates power is on. The LED stops blinking if the operation ON/OFF button on the remote control unit is pushed.
2	In a COOL operation mode, the compressor does not operate at a room temperature higher than the setting temperature that the IN DOOR FAN should operate. In a HEAT operation mode, the compressor does not operate at a room temperature lower than the setting temperature that indoor fan should operate.	In happens after a delay of 3 minutes when the compressor is reoperated. The same phenomenon occurs when a power is on. As a phenomenon that the compressor is reoperated after a delay of 3 minutes, the indoor fan is adjusted automatically with reference to a temperature of the air blew
3	Fan speed setting is not allowed in AUTO or DRY mode.	The speed of the indoor fan is set to LL in DRY mode. Fan speed is 5 steps is selected automatically in AUTO mode.
4	Compressor stops operation intermittently in DRY mode.	Compressor operation is controlled automatically in DRY mode depending on the room temperature and humidity.
5	Compressor of the outdoor unit is operating although it is turned off in a HEAT mode.	When the unit is turned off while de-ice is activated, the compressor continues operation for up to 9 minutes (maximum) until the deice is completed.
6	Timer LED only of the indoor unit lights up and the air conditioner does not operate.	Timer is being activated and the unit is in ready mode. The unit operates normally if the timer operation is cancelled.
7	The compressor and indoor fan stop intermittently in HEAT mode.	The compressor and indoor fan stop intermittently if room temperature exceeds a setting temperature in order to protect the compressor from overheated air in a HEAT mode.
8	Indoor fan and outdoor fan stop operation intermittently in a HEAT mode.	The compressor operates in a reverse cycle to remove exterior ice in a HEAT mode, and indoor fan and outdoor fan do not operate intermittently for within 20% of the total heater operation
9	The compressor stops intermittently in a COOL mode or DRY mode, and fan speed of the indoor unit decreases.	The compressor stops intermittently or the fan speed of the indoor unit decreases to prevent inside/outside air frozen depending on the inside/outside air temperature.

4) Indoor unit observes operation condition of the air conditioner, and displays self diagnosis details on the display panel.

NO	Display	Self Diagnosis
1	Operating LED blinking (1Hz)	Restore from power failure (input initial power)
2	TIM ER LED blinking (1Hz)	Indoor unit Room sensor Error (open or short)
3	OPERATING and TIM ER LED blinking (1Hz)	Indoor unit heat exchanger temperature sensor Error (open or short)
4	FAN LEA blinking (1Hz)	Indoor fan malfunctioning (for spead is Below 38Orpm)

5-2-1 No Power (completely dead)-Initial diagnosis

1) Checklist :
   (1) Is input voltage normal? (198-264V~)
   (2) Is AC power linked correctly?
   (3) Are connections between primary side, secondary side of the power transformer and PCB good.
   (4) Is output voltage of DC regulator IC KA7812 (IC01) normal? (11VDC-12.5VDC)
   (5) Is output voltage of DC regulator IC KA7805 (IC02) normal? (4.5VDC-5.5VDC)

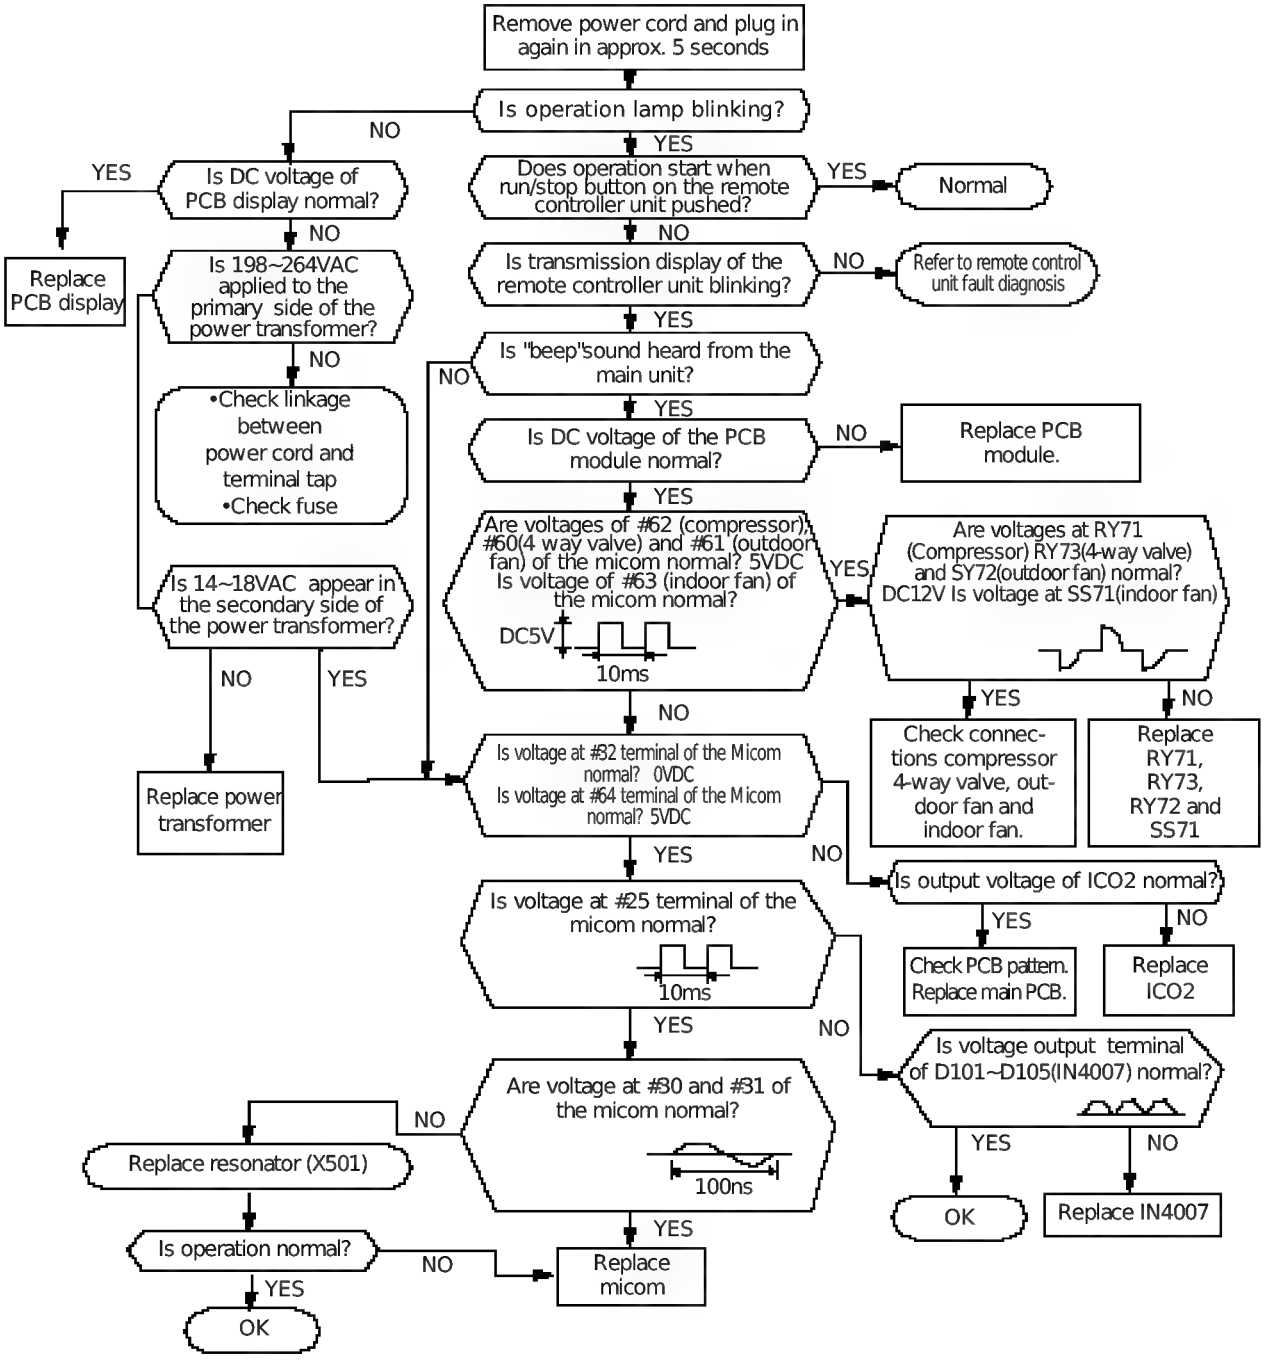

5-2-2 When the Indoor Unit Fan Does Not Operate. (Initial Diagnosis)

1) Checklist :
   (1) Is the indoor unit fan motor properly connected with the connector (CN73)?
   (2) Is the AC voltage correct?
   (3) Is HALL IC in indoor fan motor properly connected with the connector (CN43)?
   (4) Is the running capacitor properly connected with the terminal?

2) Troubleshooting procedure

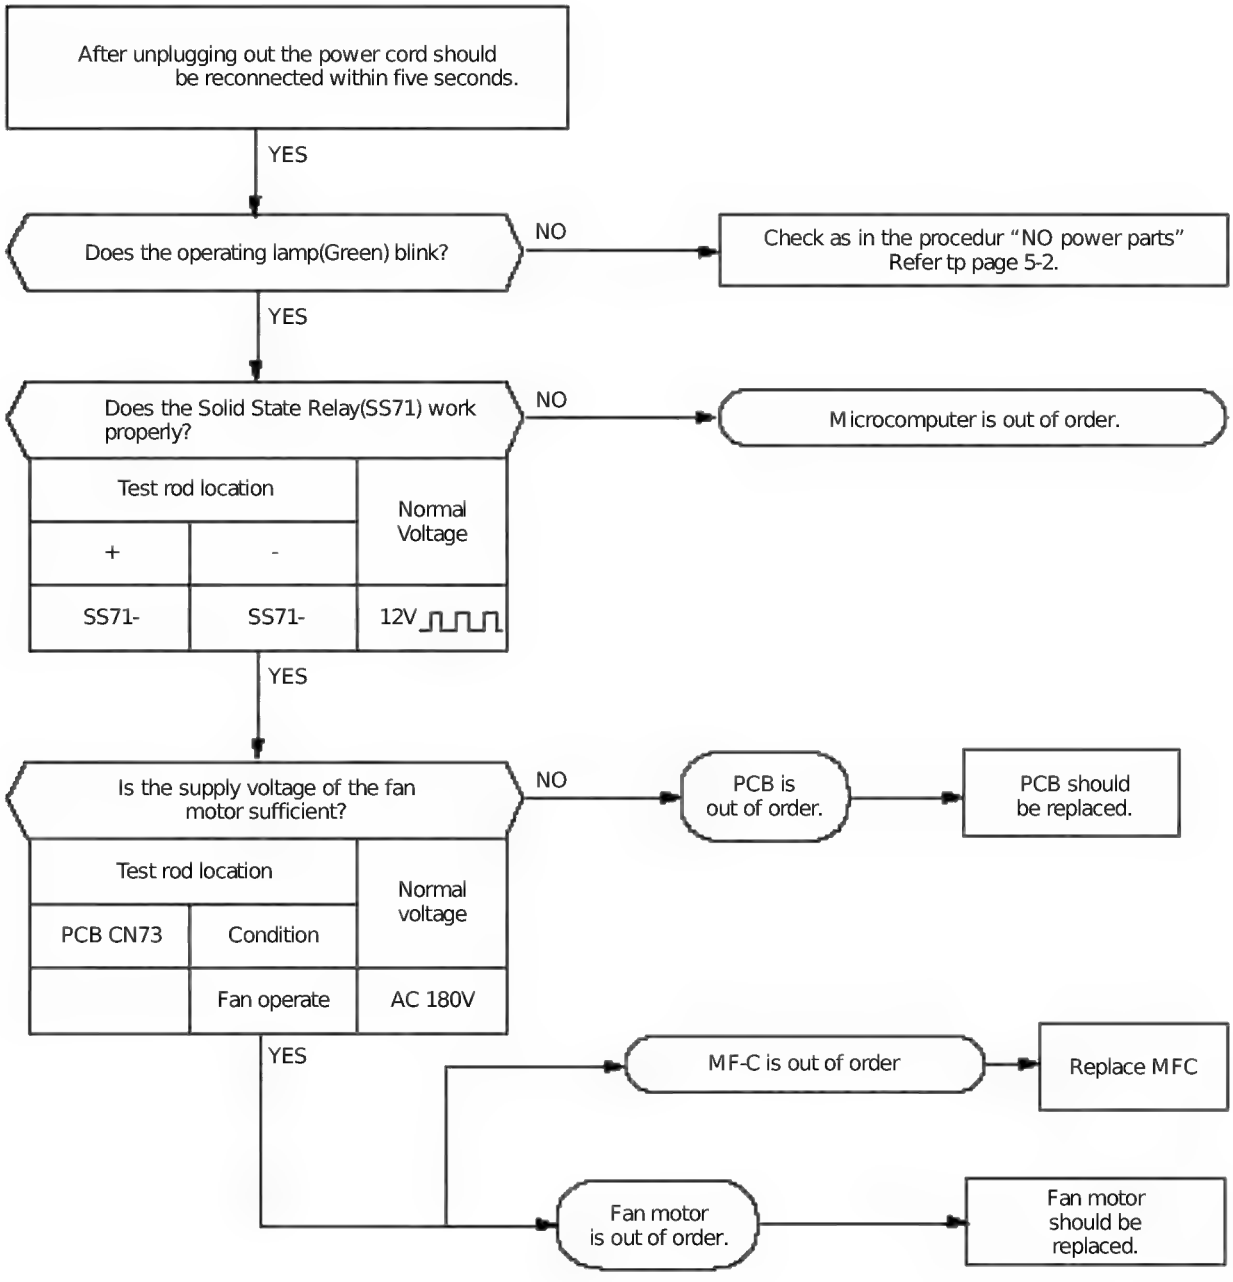

5-2-3 When the Outdoor Unit Does Not Operate. (Initial Diagnosis)

1) Checklist :
   (1) Is input voltage normal?(198~264VAC)
   (2) Is the set temperature of the remote control higher than room temperature in COOL mode?
   (3) Is the set temperature of the remote control lower than room temperature in HEAT mode?
   (4) Is the POWER IN connector (terminal-tab) linked correctly?
   (5) Is the outdoor unit properly connected with the TERMINAL BLOCK connector(5P)?

2) Troubleshooting procedure

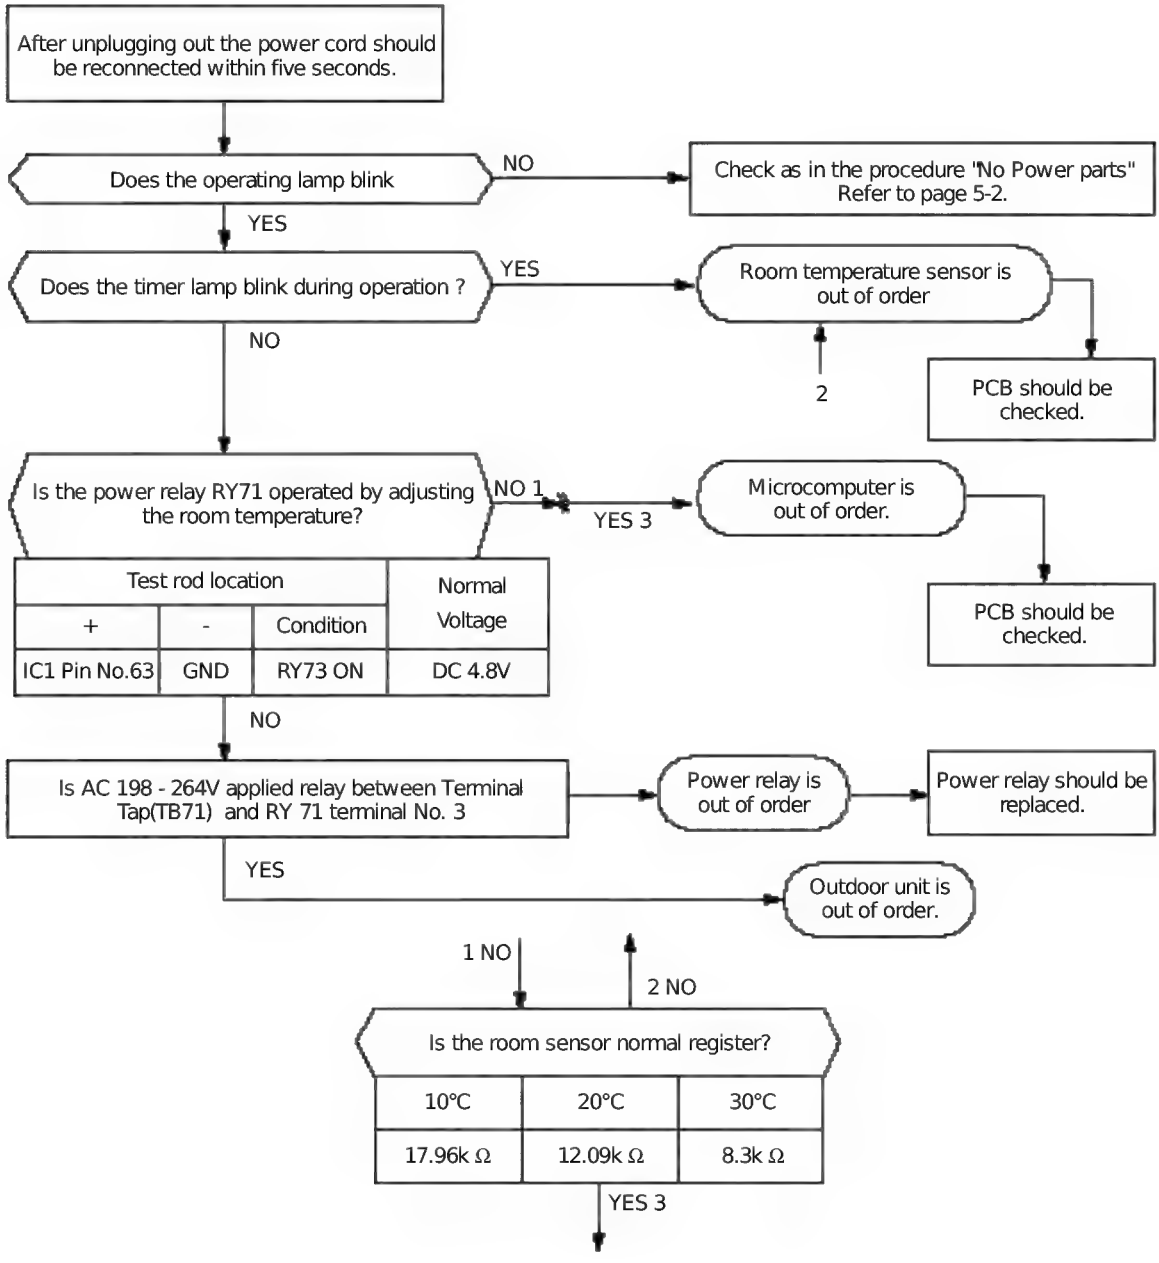

5-2-4 When the UP/DOWN Louver Moter Does Not Operate. (Initial Diagnosis)

1) Checklist :
   (1) Is input voltage normal? (198-264VAC)
   (2) Is the UP/DOWN louver motor properly connected with the connector (CN61)?

2) Troubleshooting procedure

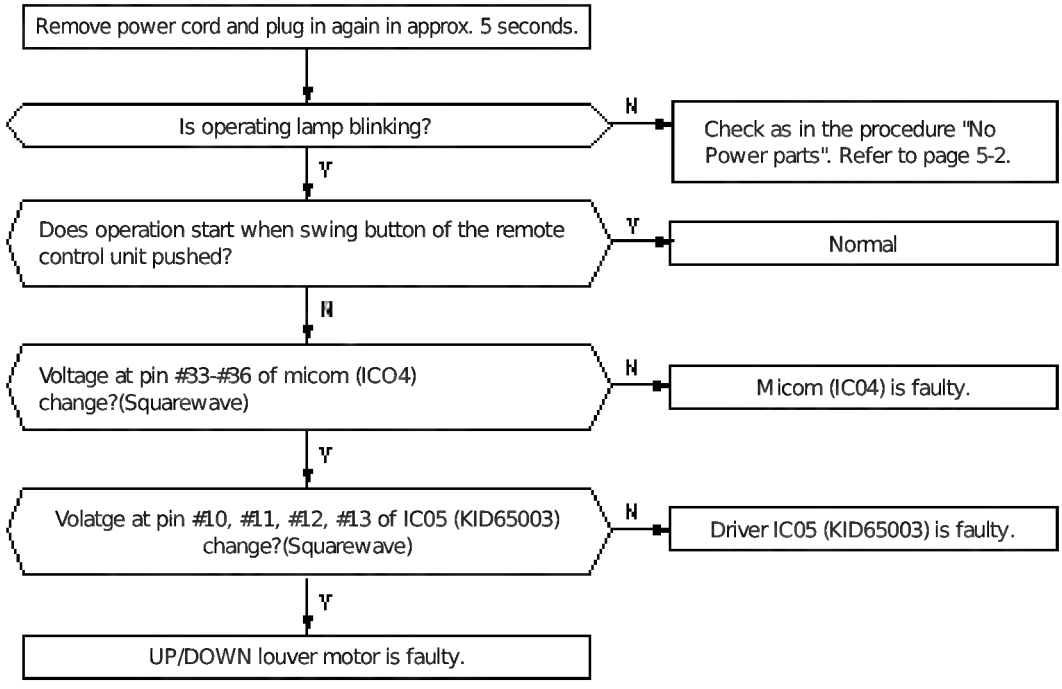
Remove power cord and plug in again in approx. 5 seconds.
Is operating lamp blinking?
N
Check as in the procedure "No Power parts". Refer to page 5-2.
Y
Does operation start when swing button of the remote control unit pushed?
Y
Normal
N
Voltage at pin #33-#36 of micom (ICO4) change?(Squarewave)
N
Micom (IC04) is faulty.
Y
Volatge at pin #10, #11, #12, #13 of IC05 (KID65003) change?(Squarewave)
N
Driver IC05 (KID65003) is faulty.
Y
UP/DOWN louver motor is faulty.

5-2-5 In the mode, When there is no warm air current. Check this first;

(1) Is the set temperature of Remote Control lower than room temperature in Heat mode?
(2) Is the Indoor PCB properly connected with the CN71 connector?

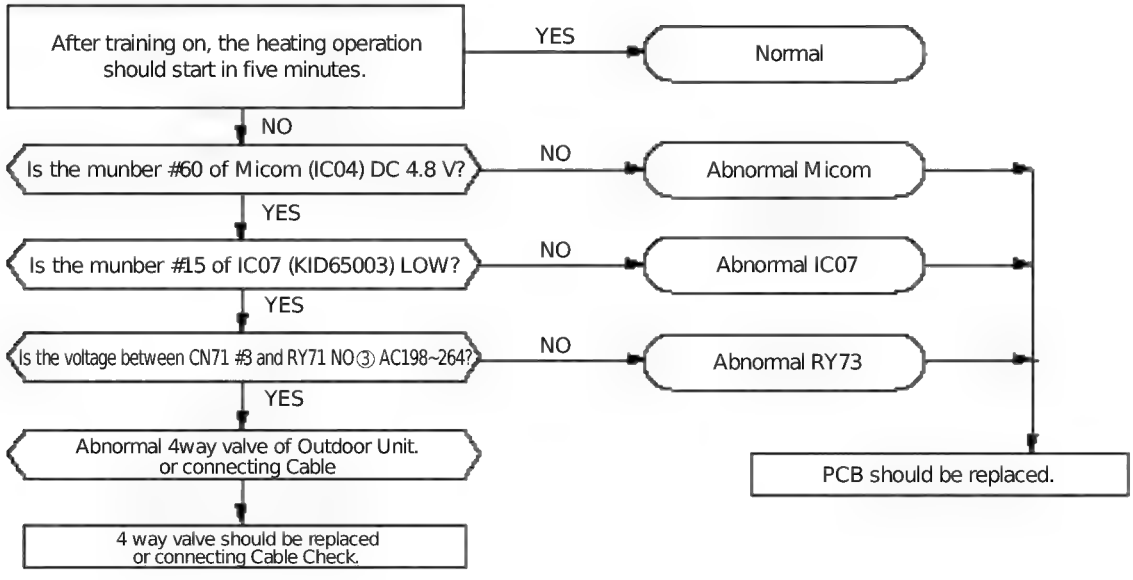
After training on, the heating operation should start in five minutes.
YES
Normal
NO
Is the munber #60 of Micom (IC04) DC 4.8 V?
NO
Abnormal Micom
YES
Is the munber #15 of IC07 (KID65003) LOW?
NO
Abnormal IC07
YES
Is the voltage between CN71 #3 and RY71 NO③ AC198~264?
NO
Abnormal RY73
YES
Abnormal 4way valve of Outdoor Unit. or connecting Cable
4 way valve should be replaced or connecting Cable Check.
PCB should be replaced.

5-2-6 If Operation By Remote Control Unit Is Impossible. (Initial Diagnosis)

1) Troubleshooting procedure

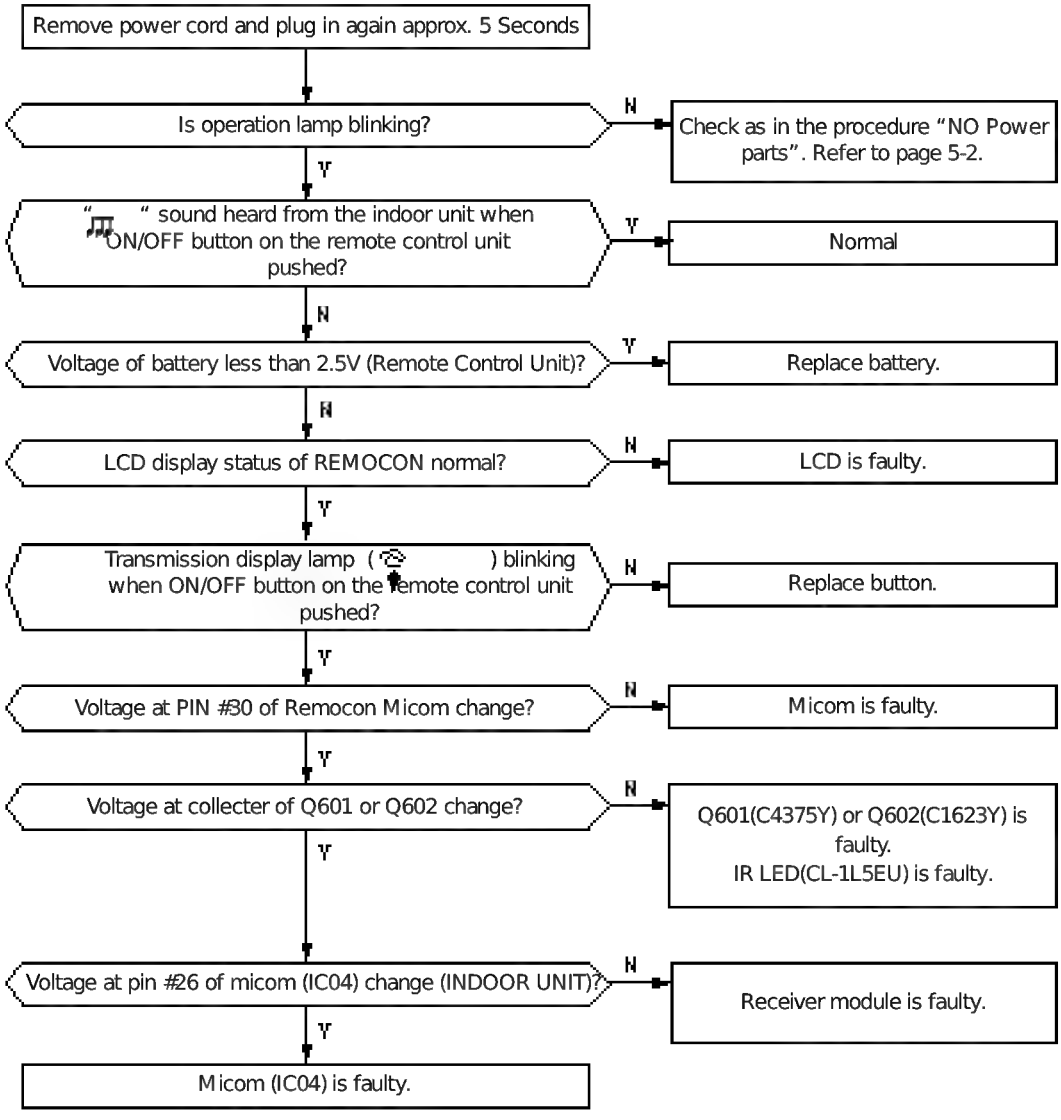
Remove power cord and plug in again approx. 5 Seconds
Is operation lamp blinking?
N
Check as in the procedure "NO Power parts". Refer to page 5-2.
Y
" sound heard from the indoor unit when ON/OFF button on the remote control unit pushed?
Y
Normal
N
Voltage of battery less than 2.5V (Remote Control Unit)?
Y
Replace battery.
N
LCD display status of REMOCON normal?
N
LCD is faulty.
Y
Transmission display lamp ( ) blinking when ON/OFF button on the remote control unit pushed?
N
Replace button.
Y
Voltage at PIN #30 of Remocon Micom change?
N
Micom is faulty.
Y
Voltage at collecter of Q601 or Q602 change?
N
Q601(C4375Y) or Q602(C1623Y) is faulty.
IR LED(CL-1L5EU) is faulty.
Y
Voltage at pin #26 of micom (IC04) change (INDOOR UNIT)?
N
Receiver module is faulty.
Y
Micom (IC04) is faulty.

5-3 PCB Inspection

5-3-1 Cautions for Part Replacement

1. The human body carries much static electricity. Before touching a part for repair, replacement or the similar purpose, be sure to touch a grounded metallic portion by hand to let the static electricity go through the matallic portion to the earth. Espectially when handling any micro computer or IC, carefully remove such static electricity before touching them.
2. When repairing any part on a work bench, be sure to place an insulative sheet on the bench and always keep the sheet surface neat without any metal fragments. If any such fragment touches a part, a secondary trouble will possibly be caused in the part.
3. Before replacing any parts, be sure to turn off the power supply. If such replacement is done with the power supply kept on, an electric shock, short circuit or destruction of a part may result.
4. During replacement or repair of a part, carefully handle it : The printed circuit board has fine lead wires (jumper wires) and glass-made parts (diode) on its substrate. So if a circuit board is roughly handled, such lead wires and parts will be easily broken or damaged by bending or shock.
5. When soldering the lead wires of any new part, be sure to polish them using an emery paper or the like before solding them. Since the lead wires of any new part are covered with an oxide film, solder cannot adhere to the lead wires if not polished.
6. When soldering any part, care should be exercised not to apply any high-wattage soldering iron to the part for a long time. Some parts are of so low a heat resistance that they may be broken or have the properties changed if a soldering iron is so applied (Otherwise, the pattern may possibly be separated and raised).
7. The heat of the soldering iron should be transfered to the entire object to be soldered. If the solder pieces are not well fused due to insufficient transfer of the heat from the soldering iron, no satisfactory electrical continuity can be assured even if the soldered objects appear well connected to each other.
8. The solder used should be limited to a minimum. If excessive solder is used, it will cause inter-pattern contact, which may cause malfunction of the circuit.

5-3-2 Procedure

The parts should be replaced in the following procedure.

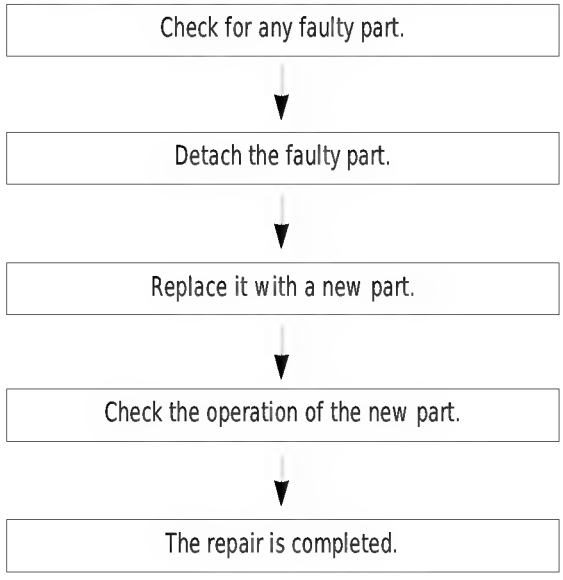
Check for any faulty part.
Detach the faulty part.
Replace it with a new part.
Check the operation of the new part.
The repair is completed.

5-3-3 Detailed Procedure

No.	Malfunction	Checking point (symptoms)	Causes
1	Pull out the power plug from the AC terminal and confirm the fuse on the PCB assembly	1. Is the broken?	1. Voltage over 2. Indoor unit fan motor short-circuit.
2	Turn the power on. If lamp blinks trouble is not related to the items 1 through 4 on the right.	Voltage check	
		1. AC voltage at both end of transformer Primary? 198 - 264V~	1. Irregular power code or power fuse, or poor wiring.
		2. AC voltage at both end of transformer secondary? 14- 18Vac	2. Transformer is faulty.
		3. DC voltage at OUT and GND of IC01 (KA7812)? 12VDC	3. Power circuit is faulty.
		4. DC voltage at OUT and GND of IC02? 5VDC	4. Power circuit is faulty.
		5. DC voltage at Q201 Base and GND change? squarewave	5. Q201 is faulty. D101~D104 (IN4007)
3	Set operating mode when RMC switch pushed. Except for [FAN]mode and [TIMER] mode.	Voltage check	
		1. Voltage of relay (RY71) coil Voltage at pin#10, pin#7 of IC07 : 12VDC	1. Relay(RY 71) coil is open. IC6(ULN2003) is faulty.
		2. Voltage at Terminal Tap (TB71 or 72) and RY71 Terminal NO④. 198- 264V~	2. Relay(RY 71) contactor is faulty.
4	Set operating mode when RMC switch pushed. 1. COOL mode 2. Fan speed [AUTO] 3. Set temperature lower than room temperature 4. Continuously operation.	1. Compressor does not operate.	1. Temperature of Heat exchange is lower. 2. PCB is faulty. 3. Room sensor or Heat exchanger temperature sensor is faulty
5	Set operating mode when RMC switch pushed. 1. HEAT mode 2. Fan speed [AUTO] 3. Set temperature higher than room temperature 4. Continuously operation	1. Compressor does not operate	1. Temperature of Heat exchange is higher. 2. PCB is faulty. 3. Room sensor or Heat exchanger temperature sensor is faulty
6	Set operating mode when RMC switch pushed. 1. [FAN] mode 2. Fan speed [Hi] 3. Continuously operation	1. Voltage at ③⑤ both ends of CN73 : above 180V~	1. Indoor unit fan motor is faulty.
		2. Indoor unit fan motor does not operate.	2. Poor connection of indoor fan motor and connector of RPM sensing (CN43)

5-4 Fault Diagnosis of Major Parts

<table>
<tr><th>Parts</th><th colspan="2">Diagnosis</th></tr>
<tr><td rowspan="11">Temp.Sensor

Heat ex. Sensor

Indoor Fan Motor

Outdoor Fan Motor</td><td colspan="2">Measure resistance with a tester.</td></tr>
<tr><td>Normal</td><td>8KΩ~27KΩ at ambient temperature (+0°C ~ +30°C)</td></tr>
<tr><td>Abnormal</td><td>∞, O Ω ... open or short</td></tr>
<tr><td colspan="2">Measure resistance between terminals (CN72) with a tester</td></tr>
<tr><td>Normal</td><td>At ambient temperature (10°C ~ 30°C)
<table><tr><th>between</th><th>Resistance</th></tr><tr><td>Red, Yellow</td><td>190±10Ω</td></tr><tr><td>Red, Blue</td><td>170±10Ω</td></tr></table></td></tr>
<tr><td>Abnormal</td><td></td></tr>
<tr><td colspan="2">Measure the voltage between ground and signal wire of the fan motor</td></tr>
<tr><td>Normal</td><td><table><tr><th>between</th><th>Voltage</th></tr><tr><td>Gray, Orange</td><td>05V~4.5V</td></tr><tr><td>Yellow, Orange</td><td>5V</td></tr></table></td></tr>
<tr><td>Abnormal</td><td>Abnormal if voltage does not change from 0V to 5V.</td></tr>
<tr><td>Normal</td><td>At ambient temperature (10°C ~ 30°C)
<table><tr><th>between</th><th>Resistance</th></tr><tr><td>Black, White</td><td>350±10Ω</td></tr><tr><td>Black, Red</td><td>270±10Ω</td></tr></table></td></tr>
<tr><td>Abnormal</td><td>∞, O Ω ... open or short</td></tr>
<tr><td rowspan="3">Stepping Motor

(UP/DOWN swing motor)</td><td colspan="2">Measure resistance between red wire and each terminal.</td></tr>
<tr><td>Normal</td><td>Approx. 380Ω at ambient temperature (20°C ~30°C)</td></tr>
<tr><td>Abnormal</td><td>∞, O Ω ... open or short</td></tr>
</table>

6. Exploded Views and Parts List

6-1 Indoor Unit

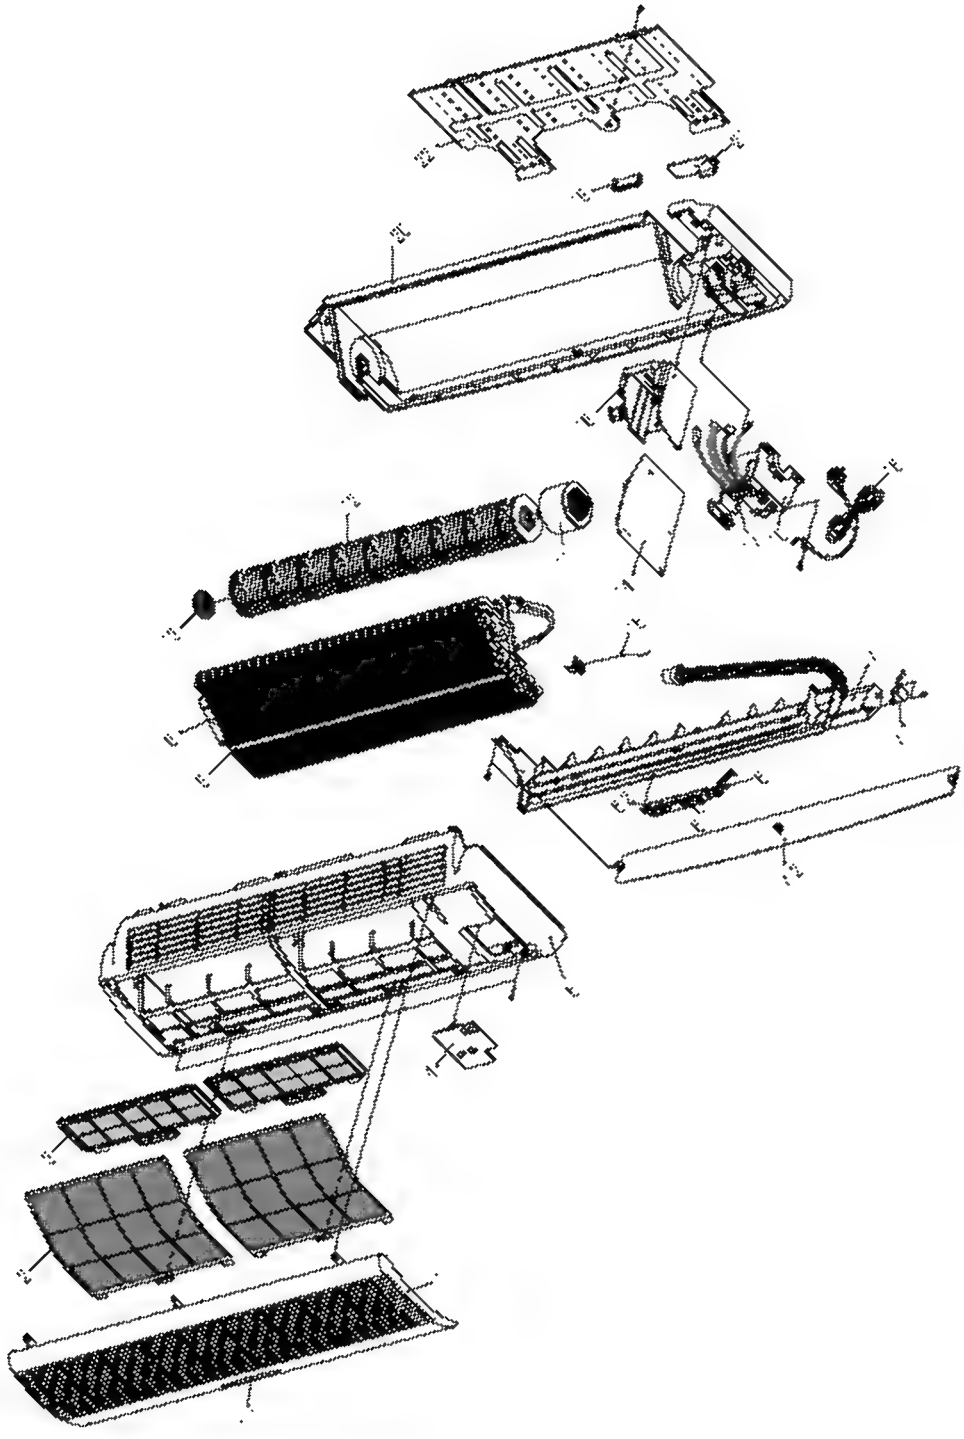

■ Parts List

No.	CODE NO	Description	Specification	Q'TY												Remark
				ASH070VE ASH070VD	ASH071VE ASH071VD	ASH074VE ASH074VD	ASH075VE ASH075VD	ASH090VE ASH090VD	ASH091VE ASH091VD	ASH094VE ASH094VD	ASH095VE ASH095VD	ASH120VE ASH120VD	ASH121VE ASH121VD	ASH124VE ASH124VD	ASH125VE ASH125VD	
1	DB64-10140A	GRILLE AIR INLET	ABS	1	1	-	-	1	1	-	-	1	1	-	-	
	DB64-10143A	〃	ABS	-	-	1	1	-	-	1	1	-	-	1	1	
1-1	DB64-70073A	PANEL CENTER DISPLAY	PC	1	1	-	-	1	1	-	-	1	1	-	-	
	DB64-70075A	〃	PC	-	-	1	1	-	-	1	1	-	-	1	1	
2	DB63-30131A	GUARD AIR FILTER	PP	2	2	2	2	2	2	2	2	2	2	2	2	
3	DB74-10091A	ASS´Y FILTER	CLEANER/CARBON	-	1	-	1	-	1	-	1	-	1	-	1	
4	DB63-10472B	COVER TERMINAL	HIPS	1	1	1	1	1	1	1	1	1	1	1	1	
5	DB92-70075C	ASS´Y FRONT PANEL	ASS´Y	1	1	-	-	1	1	-	-	1	1	-	-	
	DB92-70081A	〃	ASS´Y	-	-	1	1	-	-	1	1	-	-	1	1	
6	DB93-10470A	ASS´Y PCB DISPLAY	ASS´Y	1	1	-	-	1	1	-	-	1	1	-	-	⚠
	DB93-10475A	〃	ASS´Y	-	-	1	1	-	-	1	1	-	-	1	1	⚠
6-1	DB61-10137A	CASE CENTER PCB	PC	1	1	-	-	1	1	-	-	1	1	-	-	
	DB61-10143A	〃	PC	-	-	1	1	-	-	1	1	-	-	1	1	
6-2	DB41-10199A	PCB DISPLAY	ASS´Y	1	1	-	-	1	1	-	-	1	1	-	-	
	DB41-10200A	〃	ASS´Y	-	-	1	1	-	-	1	1	-	-	1	1	
7	DB94-10074B	ASS´Y TRAY DRAIN	ASS´Y	1	1	1	1	1	1	1	1	1	1	1	1	
7-1	DB95-20138A	ASS´Y STEP MOTOR U/D	DC12V.600GR	1	1	1	1	1	1	1	1	1	1	1	1	⚠
7-2	DB66-30153A	BLADE-H	HIPS	1	1	1	1	1	1	1	1	1	1	1	1	
8	DB75-40072A	ASS´Y EVAP	ASS´Y	-	-	-	-	-	-	-	-	1	1	1	1	
8-1	DB75-40074A	〃	ASS´Y	-	-	-	-	1	1	1	1	-	-	-	-	
8-2	DB75-40076A	〃	ASS´Y	1	1	1	1	-	-	-	-	-	-	-	-	
9	DB67-30058C	SPACER EVAP	PVC	1	1	1	1	1	1	1	1	1	1	1	1	
10	DB61-40250A	ASS´Y HOLDER MOTOR	ASS´Y	1	1	1	1	1	1	1	1	1	1	1	1	
11	DB31-10078F	MOTOR FAN IN	AMPFS040WTVB	1	1	1	1	1	1	1	1	1	1	1	1	⚠
12	DB94-30141A	ASS´Y-C-F-FAN	Ø95 X 619.4mm	1	1	1	1	1	1	1	1	1	1	1	1	
13	DB94-40017A	ASS´Y BEARING	ASS´Y	1	1	1	1	1	1	1	1	1	1	1	1	
14	DB93-10471A	ASS´Y MAIN PCB	ASS´Y	-	-	-	-	-	-	-	-	1	1	1	1	⚠
	DB93-10485A	〃	ASS´Y	-	-	-	-	1	1	1	1	-	-	-	-	⚠
	DB93-10483A	〃	ASS´Y	1	1	1	1	-	-	-	-	-	-	-	-	⚠
15	DB32-10008D	ASS´Y-THERMISTOR	ASS´Y	1	1	1	1	1	1	1	1	1	1	1	1	
16	DB39-10062V	ASS´Y POWER CORD	UCP2	1	1	1	1	1	1	1	1	1	1	1	1	⚠
17	DB65-40052A	ASS´Y TERMINAL BLOCK	ASS´Y	1	1	1	1	1	1	1	1	1	1	1	1	
18	DB61-10136A	CASE CONTROL	ABS	1	1	1	1	1	1	1	1	1	1	1	1	⚠
19	DB61-60093A	BODY-BUSH	HIPS	1	1	1	1	1	1	1	1	1	1	1	1	
20	DB94-20030B	ASS´Y BACK BODY	ASS´Y	1	1	1	1	1	1	1	1	1	1	1	1	
21	DB61-40219A	HOLDER PIPE	HIPS	1	1	1	1	1	1	1	1	1	1	1	1	
22	DB70-10618A	PLATE HANGER	SGCC-M	1	1	1	1	1	1	1	1	1	1	1	1	

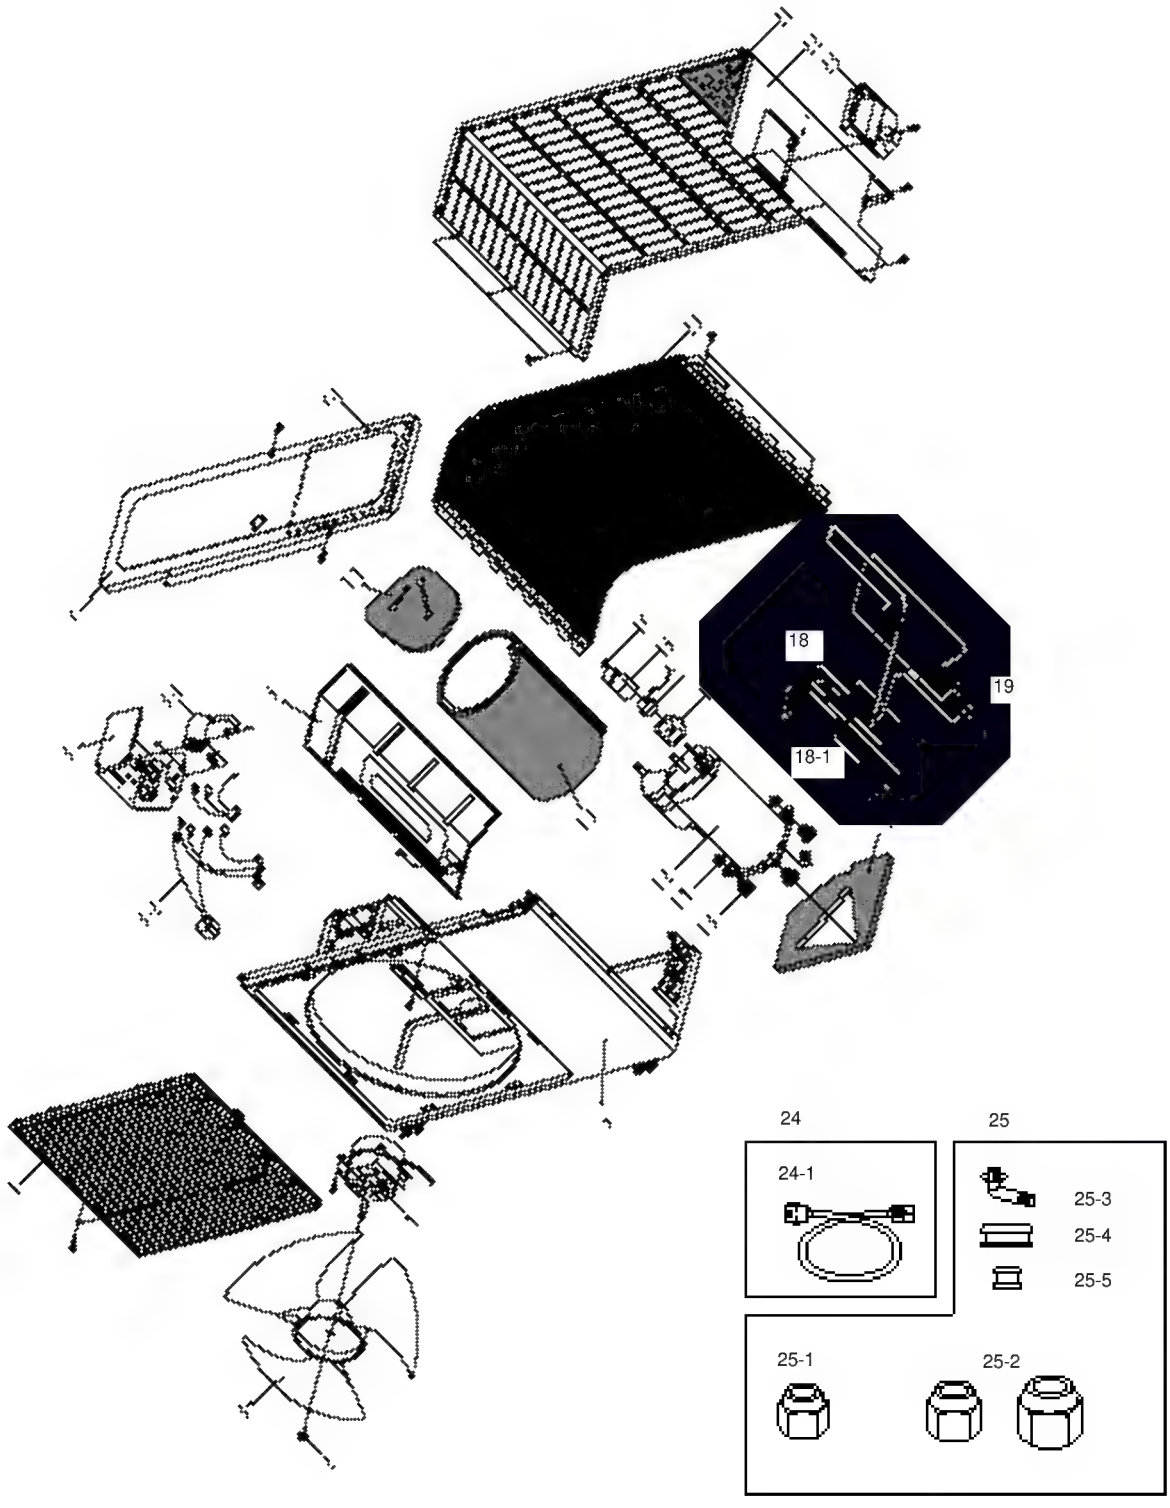
18
19
18-1
24
24-1
25
25-3
25-4
25-5
25-1
25-2

■ Parts List

No.	CODE NO	Description	Specification	Q'TY						Remark
				AXH070VE/ASH071VE AXH074VE/ASH075VE	AXH070VD/ASH071VD AXH074VD/ASH075VD	AXH090VE/ASH091VE AXH094VE/ASH095VE	AXH090VD/ASH091VD AXH094VD/ASH095VD	AXH120VE/ASH121VE AXH124VE/ASH125VE	AXH120VD/ASH121VD AXH124VD/ASH125VD	
1	DB63-30004A	GUARD FAN	ABS	1	1	1	1	1	1	
2	DB60-30004A	NUT FLANGE	2C SM 20C M6 NTR	1	1	1	1	1	1	
3	DB67-50063A	PROPELLER-FAN	AS+G/F Ø405	1	1	1	1	1	1	
4	DB31-10058C	MOTOR FAN OUT	AMASS020WTVA	-	-	-	-	1	1	⚠
	DB31-10140B	〃	AMASS015WTVA	1	1	1	1	-	-	⚠
5	DB90-50009H	ASS'Y FRAME	ASS'Y	-	-	-	-	1	1	
	DB90-50009J	〃	ASS'Y	1	1	1	1	-	-	
6	DB67-30077A	ASS'Y PARTITION	ASS'Y	-	-	-	-	1	1	
	DB94-50032B	〃	ASS'Y	1	1	1	1	-	-	
7	DB64-60138A	CABINET UPPER	SECC-P	1	1	1	1	1	1	
7-1	DB72-50560B	INSU CABI UPPER	FOAM-PE+FOAM-PU	1	1	1	1	1	1	
8	DB91-20074A	ASS'Y-E PARTS.	ASS'Y	-	-	-	-	1	-	
	DB91-20074B	〃	ASS'Y	-	-	-	-	-	1	
	DB91-20074C	〃	ASS'Y	-	-	1	-	-	-	
	DB91-20074D	〃	ASS'Y	-	-	-	1	-	-	
	DB91-20074E	〃	ASS'Y	1	-	-	-	-	-	
	DB91-20074F	〃	ASS'Y	-	1	-	-	-	-	
8-1	2501-001100	CAPACITOR	0.9/30μF 450VAC	-	-	-	-	1	-	⚠
	2501-001122	〃	1.5/30μF 450VAC	-	-	1	-	-	-	⚠
	2501-001099	〃	1.5/25μF 450VAC	1	-	-	-	-	-	⚠
	2501-001145	〃	1.2/30μF 450VAC	-	-	-	-	-	1	⚠
	2501-001147	〃	1.7/30μF 450VAC	-	-	-	1	-	-	⚠
	2501-001146	〃	1.7/20μF 450VAC	-	1	-	-	-	-	⚠
8-2	DB65-40049A	TERMINAL BLOCK	4P	1	1	1	1	1	1	
8-3	DB27-10031A	ASS'Y SOLENOLD COIL	ASS'Y	1	1	1	1	1	1	
8-4	DB39-20376A	COMP & MOTOR WIRE	ASS'Y	1	1	1	1	1	1	
8-5	DB47-20001Z	O.L.P.	MRA12030-12008	-	-	-	-	1	-	⚠
	DB47-20002B	〃	MST24AMN-12008	1	-	-	-	-	-	⚠
	DB47-20001Y	〃	MRA12037-12007	-	-	1	-	-	-	⚠
	DB47-20001V	〃	MRA98706-12008	-	-	-	-	-	1	⚠
	DB47-20002U	〃	MRA12056-12007	-	-	-	1	-	-	⚠
	DB47-20001X	〃	MST24AMM-12008	-	1	-	-	-	-	⚠
8-6	DB67-60020A	O.L.P SPRING	STS304	1	1	1	1	1	1	
9	DB72-50566A	CLOTH COMP BOTTOM	FELT	-	-	-	-	1	1	
	DB72-50558A	〃	RUB+FELT	1	1	1	1	-	-	
10	DB72-50571A	CLOTH COMP SIDE	FELT	-	-	-	-	1	1	
	DB72-50516B	〃	FELT	1	1	-	-	-	-	
	DB72-50516A	CLOTH COMP SIDE	FELT	-	-	1	1	-	-	
11	DB72-50567A	CLOTH COMP UPPER	FELT	1	1	1	1	1	1	
12	DB95-10062X	COMPRESSOR	48H124JV1E4	-	-	-	-	-	1	⚠
	DB95-10065P	〃	44H070JW1E2	1	-	-	-	-	-	⚠
	DB95-10065M	〃	44H092JW1E4	-	-	1	-	-	-	⚠
	DB95-10063C	〃	48H124MV1E4	-	-	-	-	-	1	⚠
	DB95-10065R	〃	44H092MW1E4	-	-	-	1	-	-	⚠
		〃	44H070MW1E2	-	1	-	-	-	-	⚠
13	DB73-10004A	GROMMET-ISOLATOR	EPDM	3	3	3	3	3	3	
14	DB60-30029A	NUT-WASHER	HEX 2C MB ZPC	3	3	3	3	3	3	
15	DB63-20002A	GASKET	EPDM	1	1	1	1	1	1	
16	DB63-10165B	COVER TERMINAL	NOTYL	1	1	1	1	1	1	
17	DB60-30018A	NUT-FLANGE	M5. SM20C	1	1	1	1	1	1	
18	DB99-10059B	ASS'Y 4 WAY VALVE	ASS'Y	-	-	-	-	1	1	
	DB99-10068A	〃	ASS'Y	-	-	1	1	-	-	
	DB99-10094A	〃	ASS'Y	1	1	-	-	-	-	
18-1	DB62-40035A	4-WAY VALVE	25kg/cm².G	1	1	1	1	1	1	
19	DB99-10076B	ASS'Y CHECK VALVE	ASS'Y	-	-	-	-	1	1	
	DB99-10077B	〃	ASS'Y	-	-	1	1	-	-	
	DB99-10095A	〃	ASS'Y	1	1	-	-	-	-	
20	DB96-30260A	ASS'Y COND	ASS'Y(F.P=1.5)	-	-	-	-	1	1	
	DB75-30085A	〃	ASS'Y(F.P=1.3)	-	-	1	1	-	-	
	DB75-30063A	〃	ASS'Y(F.P=1.5)	1	1	-	-	-	-	
21	DB72-50563A	INSU CABI SIDE	FOAM PE+FOAM PU	1	1	1	1	1	1	
22	DB90-10024D	ASS'Y CABI SIDE	SECC-P	1	1	1	1	1	1	
23	DB63-10443A	ASS'Y COVER E PARTS	ASS'Y	1	1	1	1	1	1	
24	DB39-20379A	ASS'Y CABLE BAG	RUBBER	1	1	1	1	1	1	
	DB39-20381A	〃	UINYL	3		-	-			
25	DB99-90033C	ASS'Y FLARE NUT	1/4" & 1/2"		-	-	-	1	1	
	DB99-90033D	〃	1/4" & 3/8"	1	1	1	1	-	-	
25-1	DB60-30010A	FLARE NUT	1/4"	2	2	2	2	2	2	OUTDOOR UNIT
25-2	DB60-30010B	〃	3/8"	2	2	2	2	-	-	
	DB60-30010C	〃	1/2"	-	-	-	-	2	2	
25-3	DB67-20008A	DRAIN PLUG	ABS	1	1	1	1	1	1	
25-4	DB63-10354A	CAP DRAIN	CR	1	1	1	1	1	1	
25-5	DB63-10355A	〃	CR	1	1	1	1	1	1	

6-3 Remote Control & PCB Box

6-3-1 Remote Control

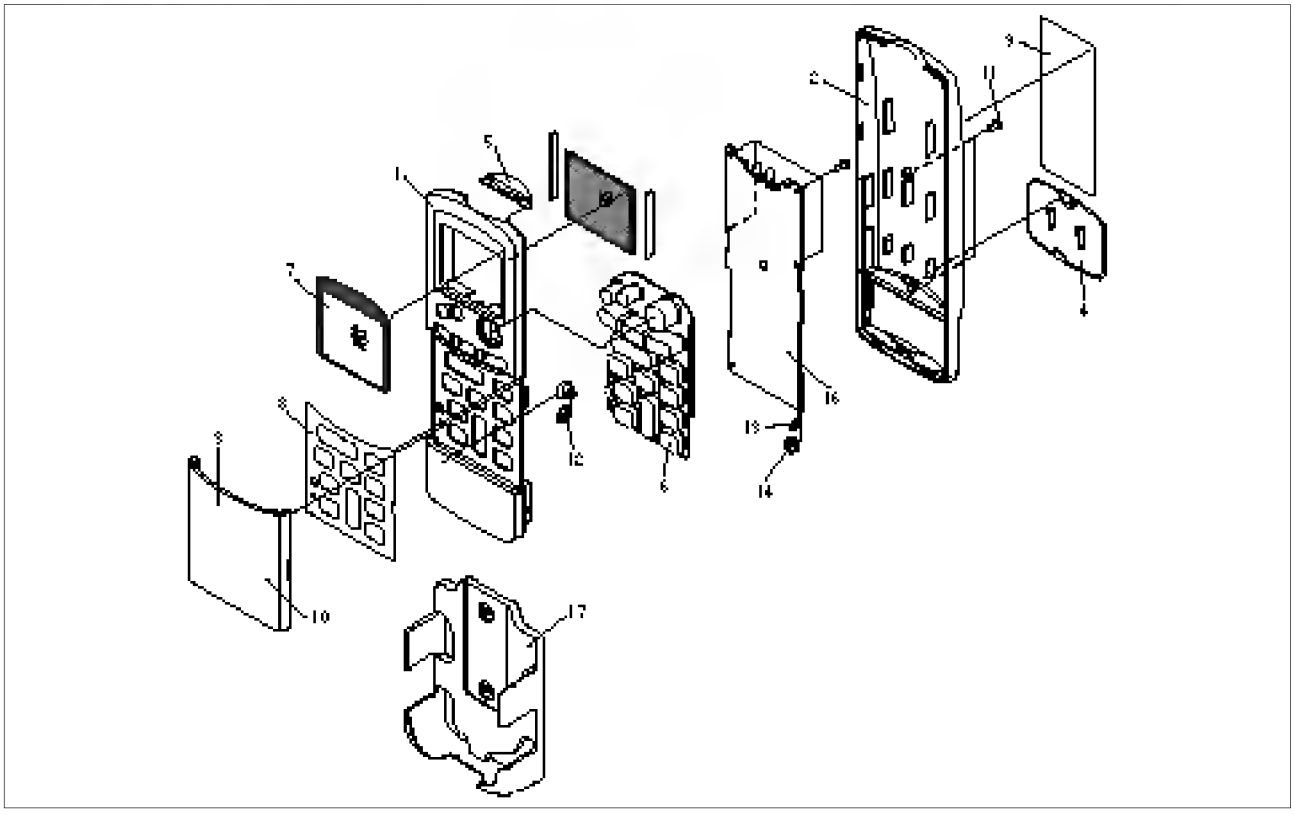

■ Parts List

No	CODE NO	Description	Specification	Q'TY	Remark
	DB93-30052C	ASS'Y CODE			
1	DB61-10144A	CASE UP	ABS	1	
2	DB61-10145A	CASE LOW	ABS	1	
3	DB64-20054A	DOOR REMOCON	ABS	1	
4	DB63-10477A	COVER BATTERY	ABS	1	
5	DB74-10084A	FILTER REMOCON	PC	1	
6	DB73-20110B	RUBBER REMOCON	SILICON	1	
7	DB64-40167A	INLAY LCD	PC	1	
8	DB64-40166B	INLAY REMOCON	PC	1	
9	DB68-10789A	LABEL REMOCON	ART 90	1	
10	DB68-10790A	LABEL DOOR	ART 90	1	
11	PH-M2	SCREW TAP	PH-M2	6	
12	DB67-60061A	SPRING BATTERY	SUS 304	1	
13	DB67-60062A	SPRING BATTERY	SUS 304	1	
14	DB67-60063A	SPRING BATTERY	SUS 304	1	
15	90 X 250	PE BAG	90 X 250	1	
16	DB93-40179C	ASS'Y PCB REMOCON		1	
17	DB61-40243A	HOLDER REMOCON	ABS	1	

6-3-2 PCB Box

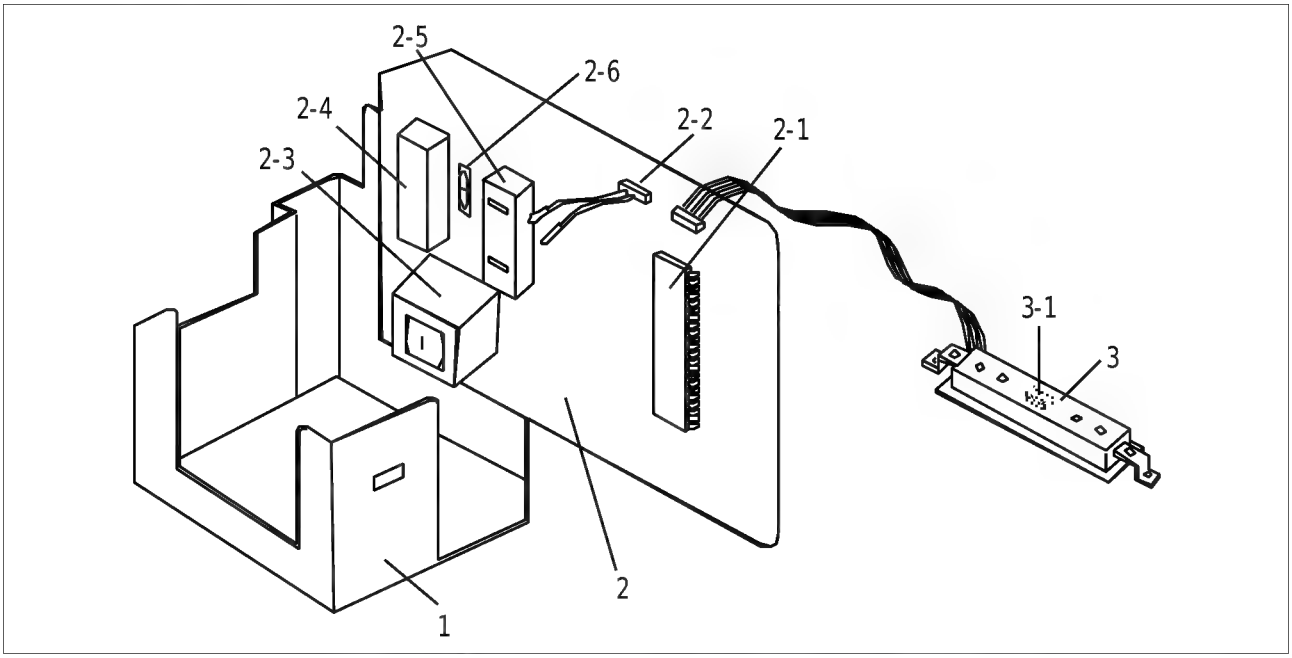

■ Parts List

No	CODE NO	Description	Specification	Q'TY			Remark
				7000	9000	12000	
1	DB61-10136A	CASE-CONTROL		1	1	1	
2	DB93-10483A	Ass'y main PCB	-	1	-	-	
	DB93-10485A	Ass'y main PCB	-	-	1	-	
	DB93-10471A	Ass'y main PCB	-	-	-	1	
2-1	DB09-10149A	Micom	M B89635R-466	1	1	1	
2-2	DB32-10008D	Thermistor-EVAP	103AT 240/240	1	1	1	
2-3	DE26-20154A	Trans-power	AC230V DC17V 300mA	1	1	1	
2-4	2306-000294	C-film	CFS 99N 450VAC 155K	1	1	1	
2-5	3501-001058	Power-relay	DI1U DC12V	1	1	1	
2-6	DE32-10037A	Fuse	250V 3.15A	1	1	1	
3	DB93-10470A	Ass'y-display and Remocon Module	-	1	1	1	ASH 070,071 VE/D 090,091 VE/D 120,121 VE/D
	DB93-10475A	Ass'y-display and Remocon Module		1	1	1	ASH 074,075,094,095 124,125 VE/D
3-1	DB32-50021A	Module-remocon	TSOP1238UU1	1	1	1	

MEMO

7. Block Diagrams

7-1 Micro Computer Block Diagram

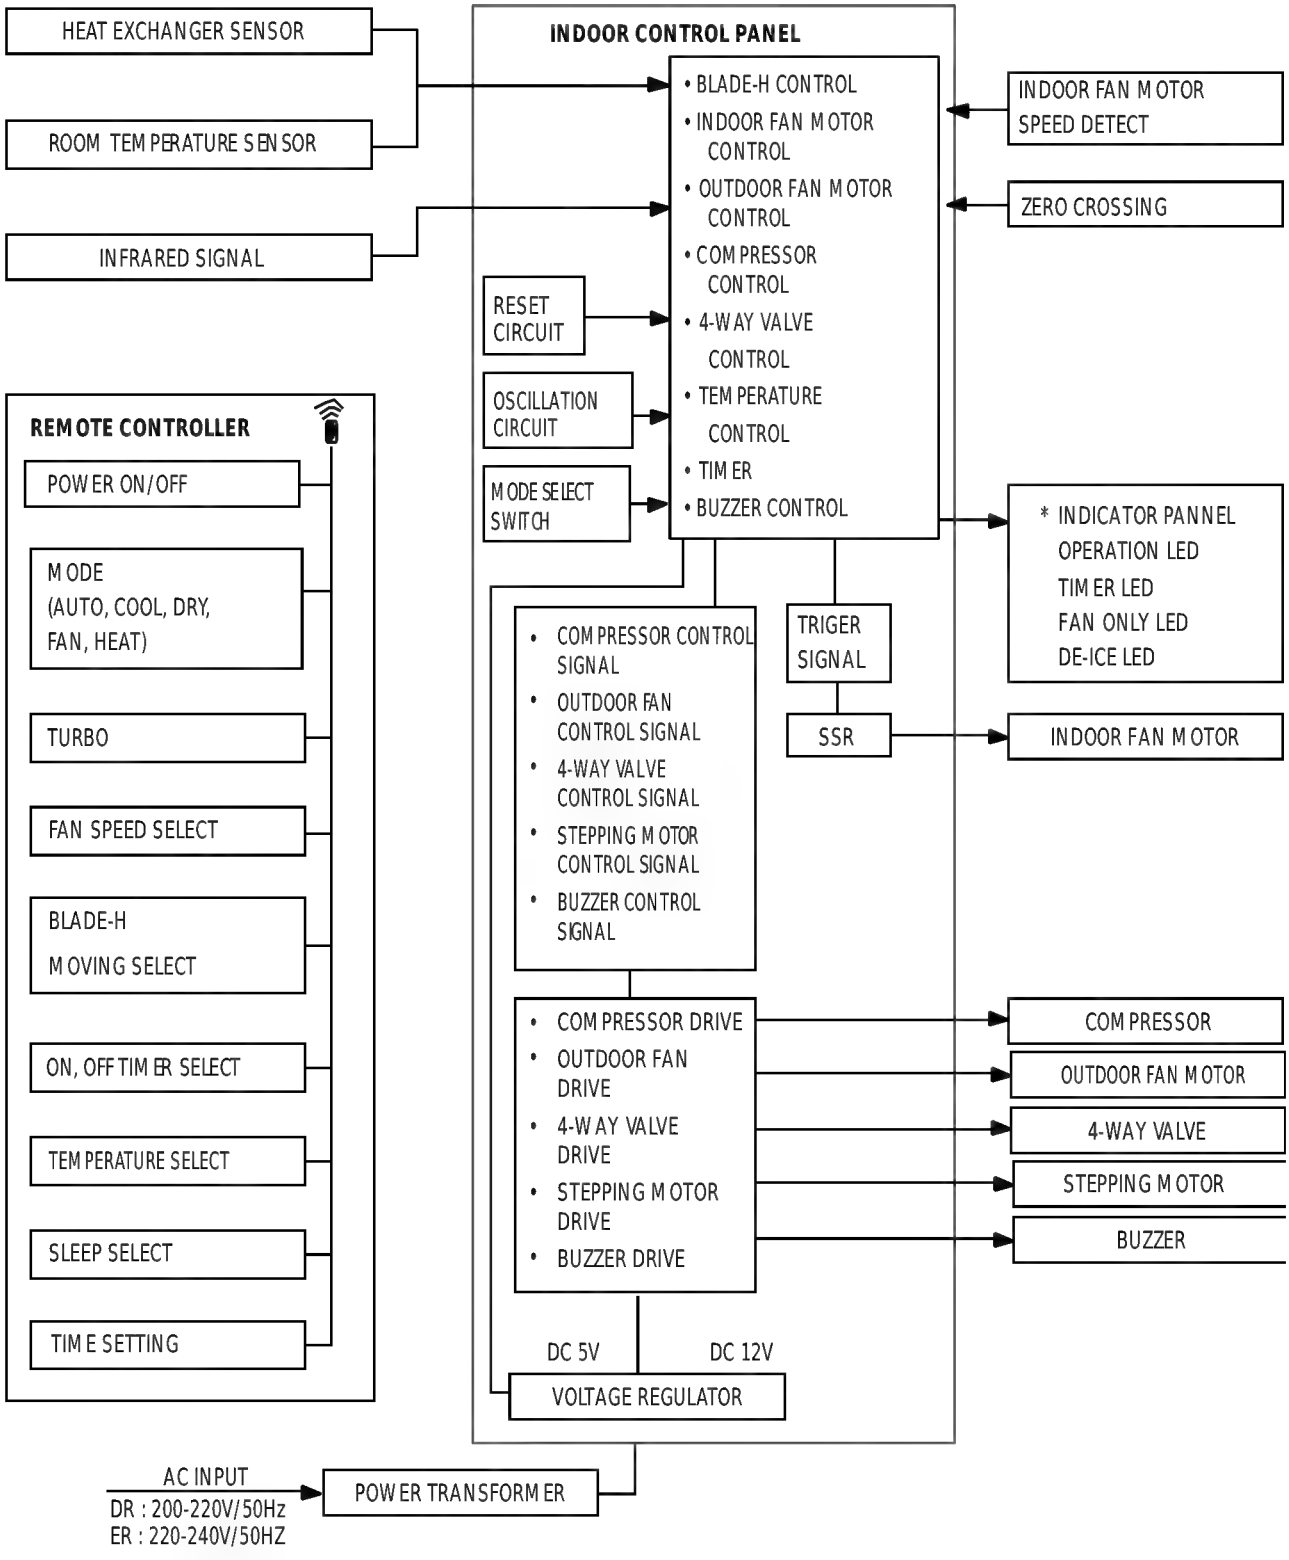

8. PCB Diagrams

8-1(a) Main PCB-7000Btu(DB93-10483A)

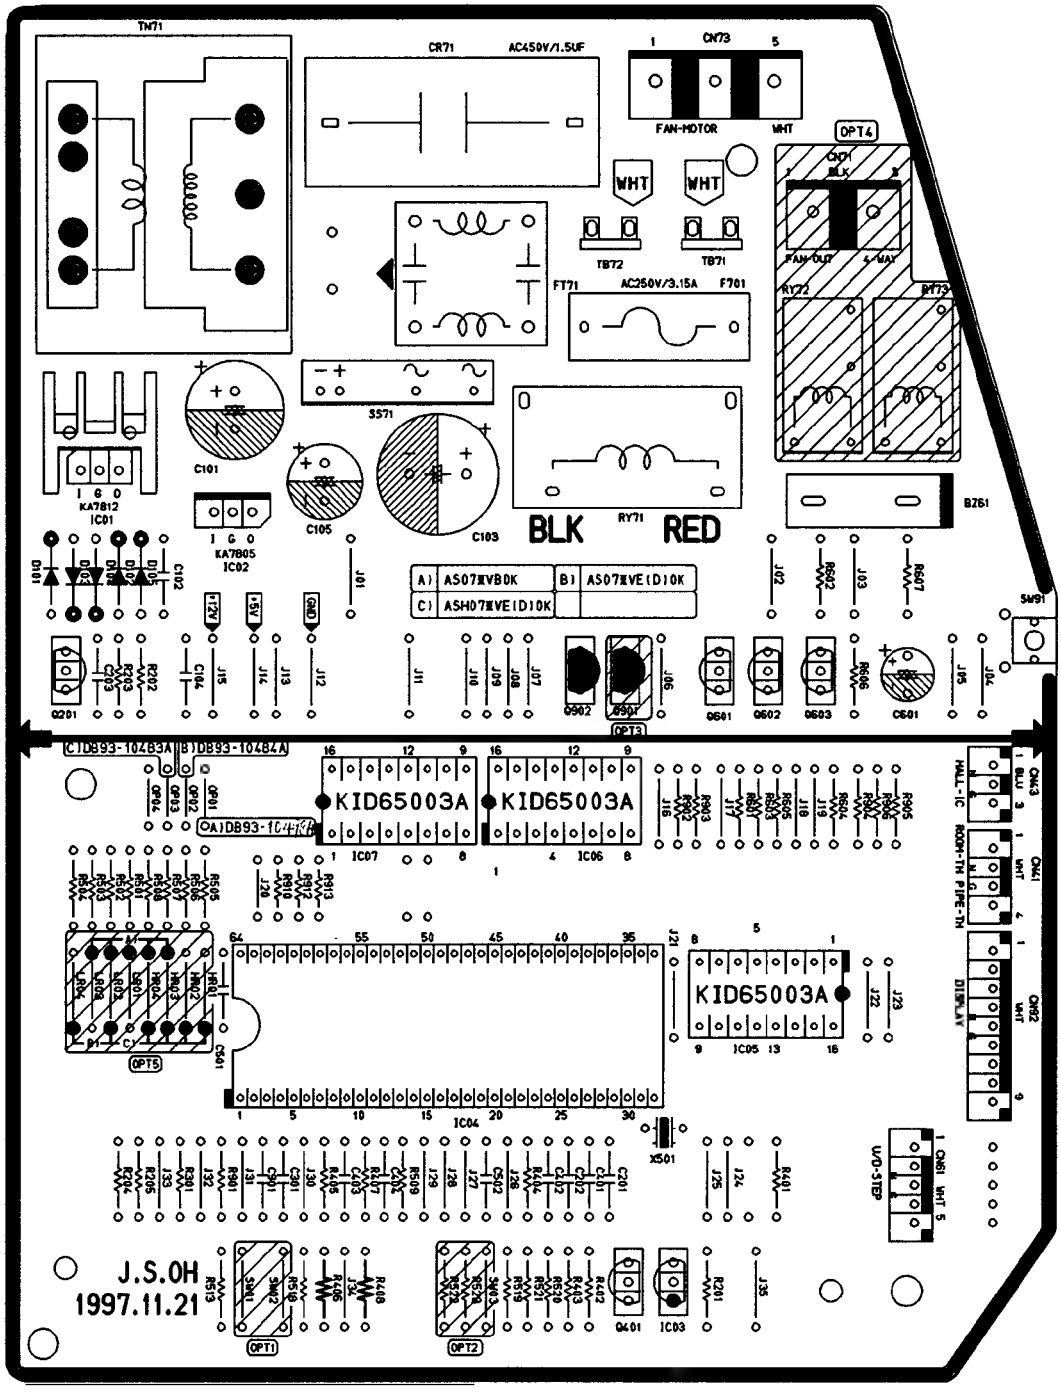

■ PART LIST

No	DESIGN LOCATION	CODE NO	Description	Specification	ASH070VE/D ASH071VE/D ASH074VE/D ASH075VE/D C	AS070VE/D AS071VE/D AS074VE/D AS075VE/D B	AS070VB AS071VB AS074VB AS075VB A
1	F701	DE32-10037A	FUSE	FST 250V 3.15A	1	1	1
2	F701	DE47-40024A	HOLDER-FUSE	FH-51H 7.5A	1	1	1
3	IC01	DE13-20008A	IC-VOLT REGU	KA7812A	1	1	1
4	IC01	DE62-30032A	HEAT-SINK	ALH25	1	1	1
5	IC01	DE60-10100A	SCREW-PH	M3*6 FeFzY	1	1	1
6	IC02	DE13-10016A	IC-VOLT REGU	KA7805A	1	1	1
7	CR71	2306-000294	C-FILM	CQS 450V 1.5	1	1	1
8	FT71	DE29-90004A	FILTER NOISE	MD250V 1.6A 6mH	1	1	1
9	R903,904,905,906	2001-000776	R-CARBON	RD 1/2 T(S) 821-J	4	4	4
10	R203	2001-000588	R-CARBON	RD 1/4 TP 332-J	1	1	1
11	R202,301,409,501~509,513,518~521,601,604,606,902	2001-000065	R-CARBON	RD 1/4 TP 103-J	21	21	21
12	R522	DE39-60001A	WIRE SO COPER	P10.6 SN T 52M M	1	1	1
13	R523	2001-000065	R-CARBON	RD 1/4 TP 103-J	1	1	1
14	R405,407	2001-000036	R-CARBON	RD 1/4 TP 331-J	2	2	2
15	R201,204,405,401,402,404,603,606	2001-000042	R-CARBON	RD 1/4 TP 102-J	8	8	8
16	R607	2001-000855	R-CARBON	RD 1/4 TP 560-J	1	1	1
17	R602	2001-001088	R-CARBON	RD 1/2 TP 102-J	1	1	1
18	R403	2001-000890	R-CARBON	RD 1/4 TP 682-J	1	1	1
19	R910,912,913	A1000-0244	R-CARBON	RD 1/8 TP 332-J	3	3	3
20	R406,408	2004-001137	R-METAL FILM	RD 1/4 TP 682-F	2	2	2
21	D101~105	0402-000137	DIODE-RECT	1N4007	5	5	5
22	SS71	B4190-0016	THYRISTOR	G3MB-202PL	1	1	1
23	BZ61	DE30-20016A	BUZZER	CBE 2220BA STICK	1	1	1
24	TN71	DE26-20154A	TRANS L.V	230V DC17V 300mA	1	1	1
25	TN71	DE60-60012A	PIN EYELET	OD2.5 L3.0	5	5	5
26	C202,402	2202-000783	C-CERAMIC	CA OA 50V 103Z	2	2	2
27	C301,401	2202-000796	C-CERAMIC	CA OA 50V 102Z	2	2	2
28	C102,104,201,203,403,404,501,502,902	2202-000780	C-CERAMIC	CA OA 50V 104Z	9	9	9
29	C103	2401-000710	C-ELEC	CE04 25V 222-M	1	1	1
30	C105	2401-001397	C-ELEC	CE 04 25V 471-M	1	1	1
31	C101	2401-000180	C-ELEC	CE 04 35V 102-M	1	1	1
32	C601	2401-001573	C-ELEC	47/50V	1	1	1
33	IC04	DE09-10149A	IC-MCU	MB89635R-466	1	1	1
34	IC03	DE13-20009A	IC	KA7533Z	1	1	1
35	X501	2802-000103	RSONATOR-CERAMIC	10MHz	1	1	1
36	IC05,IC06,IC07	DE13-20024A	IC-DRIVE	KID65003AP	3	3	3
37	Q201,401,601,602	A4050-0168	TR-GENERAL	KSC945Y	4	4	4
38	Q603	0501-000292	TRANSISTOR	A708Y	1	1	1
39	Q902, Q901	0504-000144	TRANSISTOR	R2002	2	1	1
40	SW91	3404-001013	SWITCH-TACT	KPT-1115V	1	1	1
41	CN73	3711-000262	CONNECTOR WAFER	YW396-05AV WHT	1	1	1
42	CN43	3711-000879	CONNECTOR WAFER	SMW250-03 BLU	1	1	1
43	CN41	3711-002662	CONNECTOR WAFER	JSW250-02WHT	1	1	1
44	CN61	3711-000999	CONNECTOR WAFER	SMW250-05 WHT	1	1	1
45	CN62	3711-000997	CONNECTOR WAFER	SMW250-05BLU	1	1	1
46	CN71		CONNECTOR WAFER	YW396-03AV BLK	1	0	0
47	CN92	3711-001154	CONNECTOR WAFER	SMW250-09 WHT	1	1	1
48	TB71,72	DE59-30001A	CONNECTOR-TERMINAL	250TAP,1PIN	2	2	2
49	RY71	3501-001058	RELAY	DI1U DC12V	1	1	1
50	RY72,RY72	B3068-0092	RELAY	JQ1a-12V	2	0	0
51	J1~J35	DE39-60001A	WIRE SO COPER	PI0.6 SN T 52M M	35	35	35
52	HR01	DE39-60001A	WIRE SO COPER	PI0.6 SN T 52M M	1	1	0
53	HR02	DE39-60001A	WIRE SO COPER	PI0.6 SN T 52M M	1	1	0
54	HR03	DE39-60001A	WIRE SO COPER	PI0.6 SN T 52M M	1	1	1
55	HR04	DE39-60001A	WIRE SO COPER	PI0.6 SN T 52M M	1	1	1
56	LR01	DE39-60001A	WIRE SO COPER	PI0.6 SN T 52M M	0	0	1
57	LR02	DE39-60001A	WIRE SO COPER	PI0.6 SN T 52M M	1	1	1
58	LR03	DE39-60001A	WIRE SO COPER	PI0.6 SN T 52M M	0	0	1
59	LR04	DE39-60001A	WIRE SO COPER	PI0.6 SN T 52M M	1	1	0
60	SW02	DE39-60001A	WIRE SO COPER	PI0.6 SN T 52M M	1	0	0
61	SW01	DE39-60001A	WIRE SO COPER	PI0.6 SN T 52M M	0	1	1
62	OP01	DE39-60001A	WIRE SO COPER	PI0.6 SN T 52M M	0	0	1
63	OP02	DE39-60001A	WIRE SO COPER	PI0.6 SN T 52M M	0	1	0
64	OP03	DE39-60001A	WIRE SO COPER	PI0.6 SN T 52M M	1	0	0
65	OP04	DE39-60001A	WIRE SO COPER	PI0.6 SN T 52M M	0	0	0

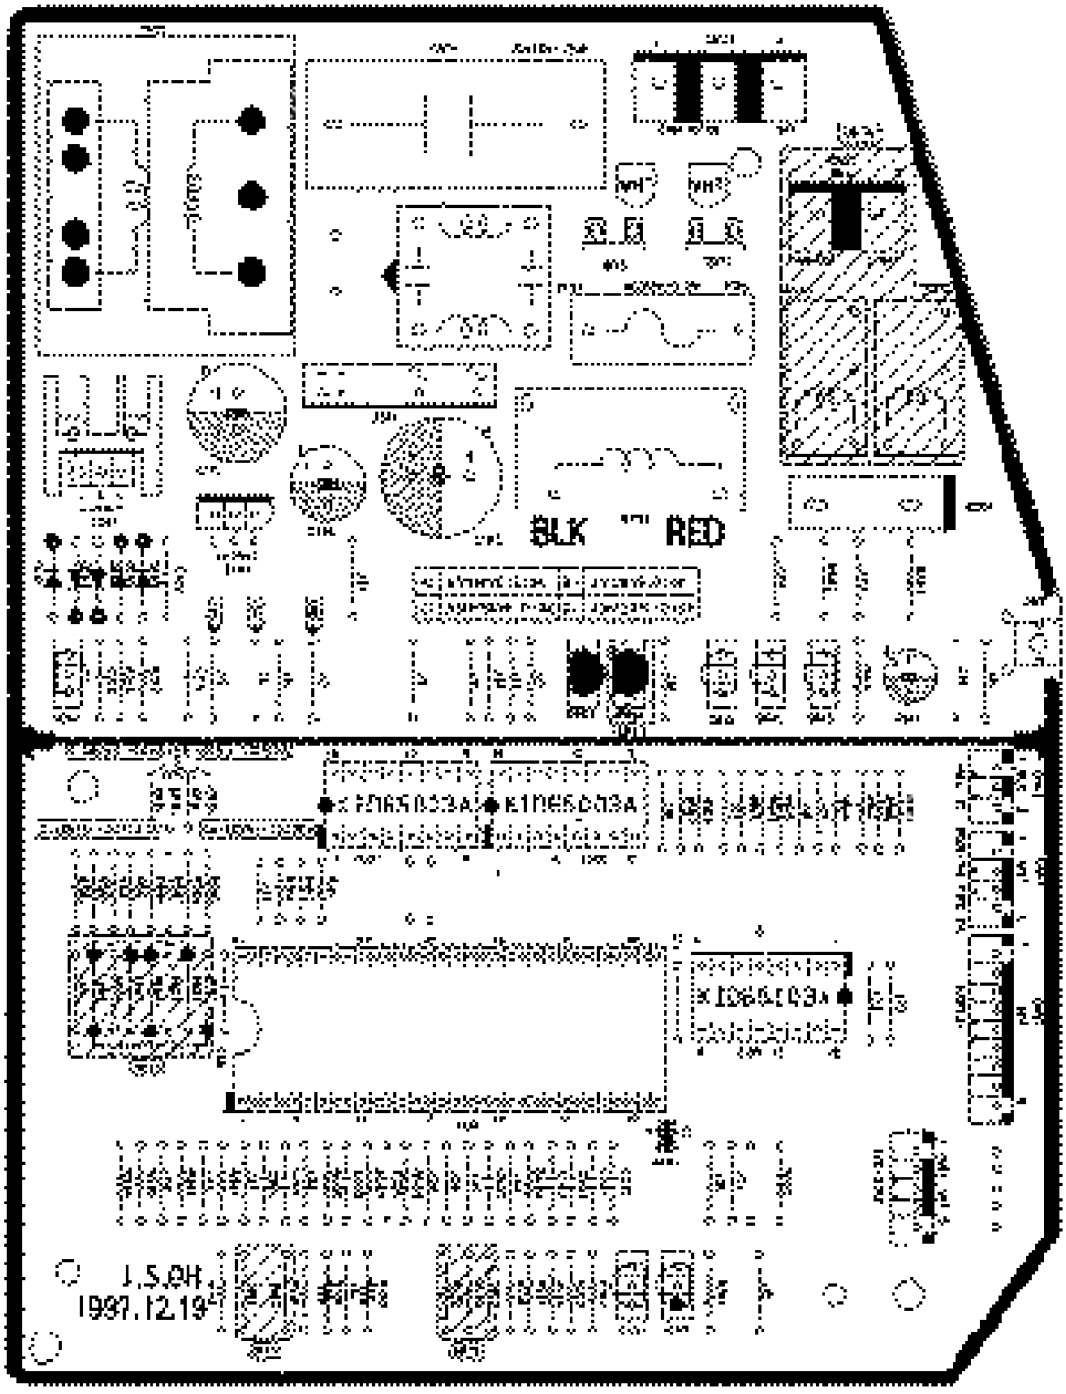
BLK
RED
1.5.0H
1997.12.19

■ PART LIST

No	DESIGN LOCATION	CODE NO	Description	Specification	A/S			
					ASH090VE/D ASH091VE/D ASH094VE/D ASH095VE/D C	ASH120VE/D ASH121VE/D ASH124VE/D ASH125VE/D D	AS090VE/D AS091VE/D AS094VE/D AS095VE/D A	AS120VE/D AS121VE/D AS124VE/D AS125VE/D B
1	F701	DE32-10037A	FUSE	FST 250V 3.15A	1	1	1	1
2	F701	DE47-40024A	HOLDER-FUSE	FH-51H 7.5A	1	1	1	1
3	IC01	DE13-20008A	IC-VOLT REGU	KA7812A	1	1	1	1
4	IC01	DE62-30032A	HEAT-SINK	AL H25	1	1	1	1
5	IC01	DE60-10100A	SCREW-PH	M 3*6 FeFzY	1	1	1	1
6	IC02	DE13-10016A	IC-VOLT REGU	KA7805A	1	1	1	1
7	CR71	2306-000294	C-FILM	CQS 450V 1.5	1	1	1	1
8	FT71	DE29-90004A	FILTER NOISE	MD250V 1.6A 6mH	1	1	1	1
9	R903,904,905,906	2001-000776	R-CARBON	RD 1/2 T(S) 821-J	4	4	4	4
10	R203	2001-000588	R-CARBON	RD 1/4 TP 332-J	1	1	1	1
11	R202,301,409,501~509,513,518~521,601,604,606,902	2001-000065	R-CARBON	RD 1/4 TP 103-J	21	21	21	21
12	R522	2001-000065	R-CARBON	RD 1/4 TP 103-J	1	1	0	0
13	R523	2001-000065	R-CARBON	RD 1/4 TP 103-J	1	1	0	0
14	R405,407	2001-000036	R-CARBON	RD 1/4 TP 331-J	2	2	2	2
15	R201,204,405,401,402,404,603,606	2001-000042	R-CARBON	RD 1/4 TP 102-J	8	8	8	8
16	R607	2001-000855	R-CARBON	RD 1/4 TP 560-J	1	1	1	1
17	R602	2001-001088	R-CARBON	RD 1/2 TP 102-J	1	1	1	1
18	R403	2001-000890	R-CARBON	RD 1/4 TP 682-J	1	1	1	1
19	R910,912,913	A1000-0224	R-CARBON	RD 1/8 TP 332-J	3	3	3	3
20	R406,408	2004-001137	R-METAL FILM	RD 1/4 TP 682-F	2	2	2	2
21	D101~105	0402-000137	DIODE-RECT	1N4007	5	5	5	5
22	SS71	B4190-0016	THYRISTOR	G3MB-202PL	1	1	1	1
23	BZ61	DE30-20016A	BUZZER	CBE 2220BA STICK	1	1	1	1
24	TN71	DE26-20154A	TRANS L.V	230V DC17V 300mA	1	1	1	1
25	TN71	DE60-60012A	PIN EYELET	OD2.5 L3.0	5	5	5	5
26	C202,402	2202-000783	C-CERAMIC	CA OA 50V 103Z	2	2	2	2
27	C301,401	2202-000796	C-CERAMIC	CA OA 50V 102Z	2	2	2	2
28	C102,104,201,203,403,404,501,502,902	2202-000780	C-CERAMIC	CA OA 50V 104Z	9	9	9	9
29	C103	2401-000710	C-ELEC	CE04 25V 222-M	1	1	1	1
30	C105	2401-001397	C-ELEC	CE 04 25V 471-M	1	1	1	1
31	C101	2401-000180	C-ELEC	CE 04 35V 102-M	1	1	1	1
32	C601	2401-001573	C-ELEC	47/50V	1	1	1	1
33	IC04	DE09-10149A	IC-MCU	MB89635R-466	1	1	1	1
34	IC03	DE13-20009A	IC	KA7533Z	1	1	1	1
35	X501	2802-000103	RSONATOR-CERAMIC	10MHz	1	1	1	1
36	IC05,IC06,IC07	DE13-20024A	IC-DRIVE	KID65003AP	3	3	3	3
37	Q201,401,601,602	A4050-0168	TR-GENERAL	KSC945Y	4	4	4	4
38	Q603	0501-000292	TRANSISTOR	A708Y	1	1	1	1
39	Q902, Q901	0504-000144	TRANSISTOR	R2002	2	2	1	1
40	SW91	3404-001013	SWITCH-TACT	KPT-1115V	1	1	1	1
41	CN73	3711-000262	CONNECTOR WAFER	YW396-05AV WHT	1	1	1	1
42	CN43	3711-000879	CONNECTOR WAFER	SMW250-03 BLU	1	1	1	1
43	CN41	3711-002662	CONNECTOR WAFER	JSW250-02WHT	1	1	1	1
44	CN61	3711-000999	CONNECTOR WAFER	SMW250-05 WHT	1	1	1	1
45	CN62	3711-000997	CONNECTOR WAFER	SMW250-05BLU	1	1	1	1
46	CN71		CONNECTOR WAFER	YW396-03AV BLK	1	1	0	0
47	CN92	3711-001154	CONNECTOR WAFER	SMW250-09 WHT	1	1	1	1
48	TB71,72	DE59-30001A	CONNECTOR-TERMINAL	250TAP,1PIN	2	2	2	2
49	RY71	3501-001058	RELAY	DI1U DB12V	1	1	1	1
50	RY72,RY72	B3068-0092	RELAY	JQ1a-12V	2	2	0	0
51	J1~J35	DE39-60001A	WIRE SOCOPER	PI0.6 SNT52MM	35	35	35	35
52	HR01	DE39-60001A	WIRE SOCOPER	PI0.6 SNT52MM	0	1	0	1
53	HR02	DE39-60001A	WIRE SOCOPER	PI0.6 SNT52MM	1	0	1	0
54	HR03	DE39-60001A	WIRE SOCOPER	PI0.6 SNT52MM	0	0	0	0
55	HR04	DE39-60001A	WIRE SOCOPER	PI0.6 SNT52MM	1	1	1	1
56	LR01	DE39-60001A	WIRE SOCOPER	PI0.6 SNT52MM	1	0	1	0
57	LR02	DE39-60001A	WIRE SOCOPER	PI0.6 SNT52MM	0	0	0	0
58	LR03	DE39-60001A	WIRE SOCOPER	PI0.6 SNT52MM	1	1	1	1
59	LR04	DE39-60001A	WIRE SOCOPER	PI0.6 SNT52MM	0	0	0	0
60	SW02	DE39-60001A	WIRE SOCOPER	PI0.6 SNT52MM	1	1	0	0
61	SW01	DE39-60001A	WIRE SOCOPER	PI0.6 SNT52MM	0	0	1	1
62	OP01	DE39-60001A	WIRE SOCOPER	PI0.6 SNT52MM	1	0	0	0
63	OP02	DE39-60001A	WIRE SOCOPER	PI0.6 SNT52MM	0	1	0	0
64	OP03	DE39-60001A	WIRE SOCOPER	PI0.6 SNT52MM	0	0	1	0
65	OP04	DE39-60001A	WIRE SOCOPER	PI0.6 SNT52MM	0	0	0	1

8-2 ASS'Y DISPLAY & Module

•DB93-10470A : ASH070,071,090,091,120,121VE/D
•DB93-10475A : ASH074,075,094,095,124,125VE/D

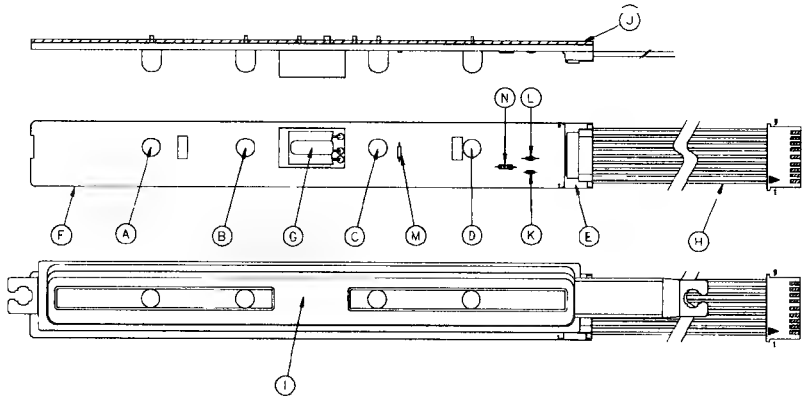

• PCB-DISPLAY (ASH070,071,090,091,120,121VE/D) : DB41-10199A



• PCB-DISPLAY (ASH074,075,094,095,124,125VE/D) : DB41-10200A

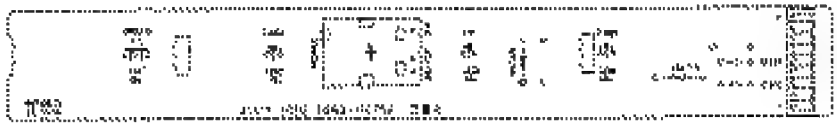

■ PART UST

No	Description	CODE-NO	Specification	Q'TY
A	LED - LAMP	DB07-10022A	LTL-52EG-002(ORG/GRN)	1
B	LED - LAMP	0601-001059	SY5511 (YEL)	1
C	LED - LAMP	0601-001060	SM5511 (GRN)	1
D	LED - LAMP	0601-001196	SO5511 (ORG)	1
E	CONNECTOR WAFER		YWLA200-09P	1
F	PCB-DISPLAY	DB41-10200A	FR-1T1.6 W20L170	1
		DB41-10199A	FR-1T1.6 W20L170	1
G	MODULE REMOCON	DB32-50021A	TSOP-1238UU1	1
H	C/W DIS & MODULE	DB39-20346A	-	1
I	CASE-CENTER PCB	DB61-10143A	ASH074,075,094,095,124,125VE/D	1
		DB61-10137A	ASH070,071,090,091,120,121VE/D	1
J	PAINT		DCR200H(BROWN)	
K	C-CERAMIC	2202-000780	CA OA 50V 104Z	1
L	C-CERAMIC	2201-000283	CA OA 50V 102Z	1
M	DIOD-SWITCHING	0401-000005	1N4148	1
N	R-CARBON	2001-000034	RD 1/4TP 221-J	1

9. Wiring Diagrams

9-1 Indoor Unit

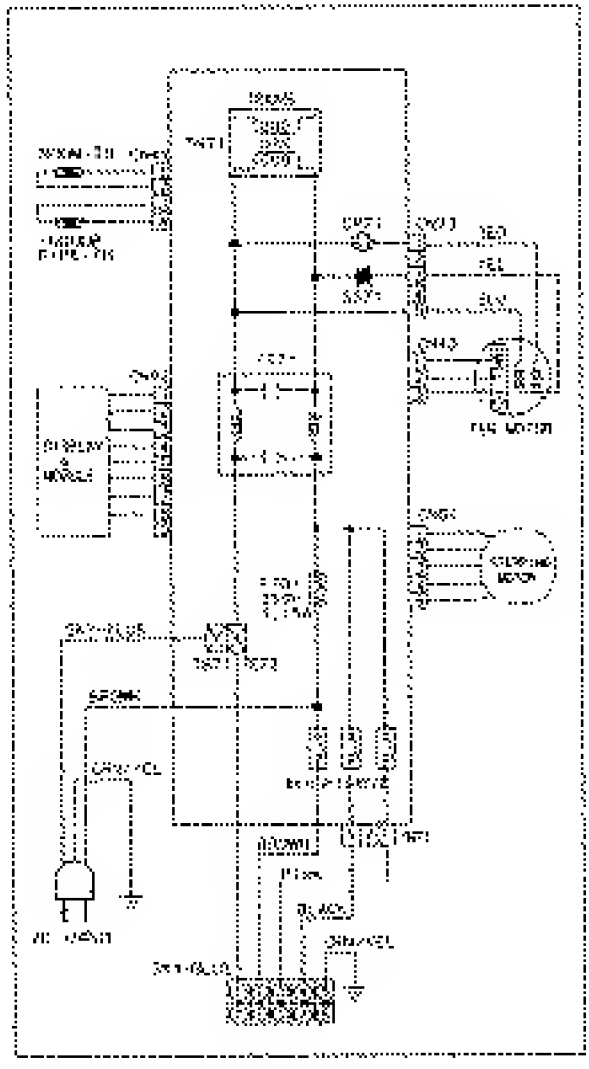

9-2 Outdoor Unit

■ AXH 120/121/124/125VE

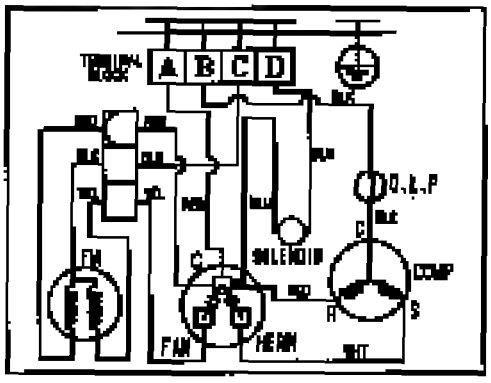

CAPACITOR	AXH120/121/124/125VE: 0.9/30μF X 450VAC

■ AXH 120/121/124/125VD

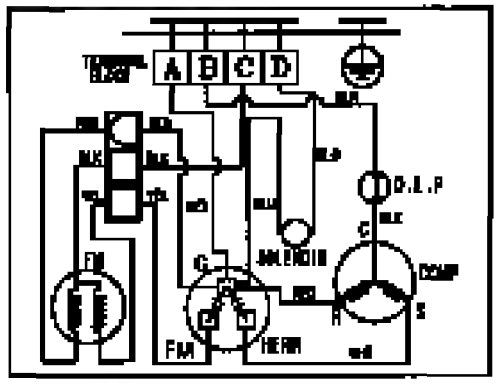

CAPACITOR	AXH120/121/124/125VD: 1.2/30μF X 450VAC

■ AXH 070/071/074/075VE

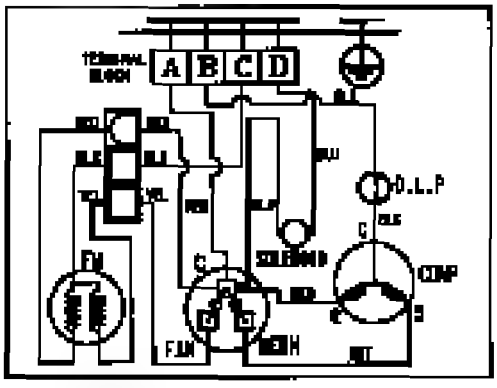

CAPACITOR	AXH070/071/074/075VE: 1.5/25μF X 450VAC

■ AXH 070/071/074/075VD

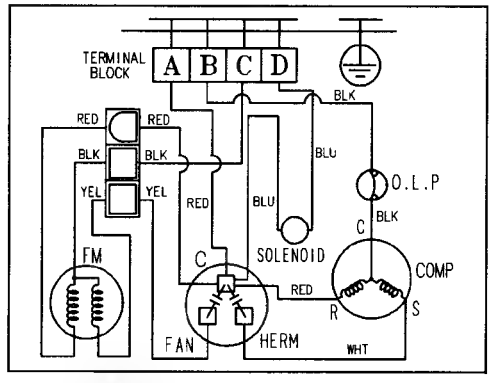

CAPACITOR	AXH070/071/074/075VD: 1.7/20μF X 450VAC

■ AXH 090/091/094/095VE

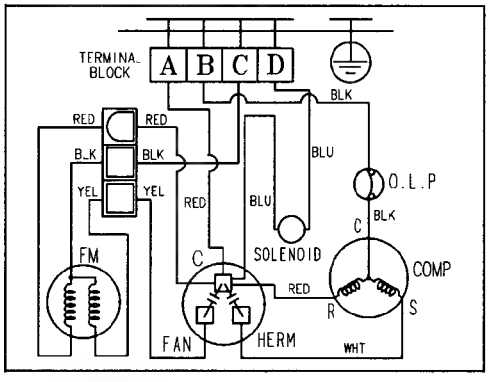

CAPACITOR	AXH090/091/094/095VE: 1.5/30μF X 450VAC

■ AXH 090/091/094/095VD

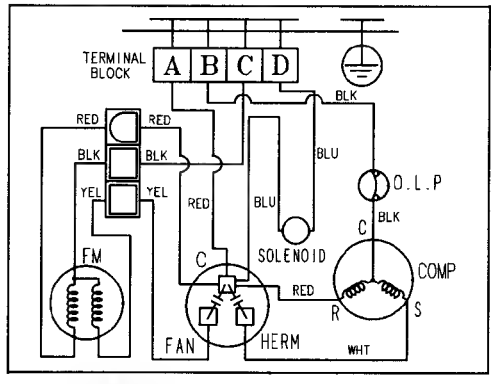

CAPACITOR	AXH090/091/094/095VD: 1.7/30μF X 450VAC

MEMO

MEMO

10. Schematic Diagrams

10-1 Indoor Unit

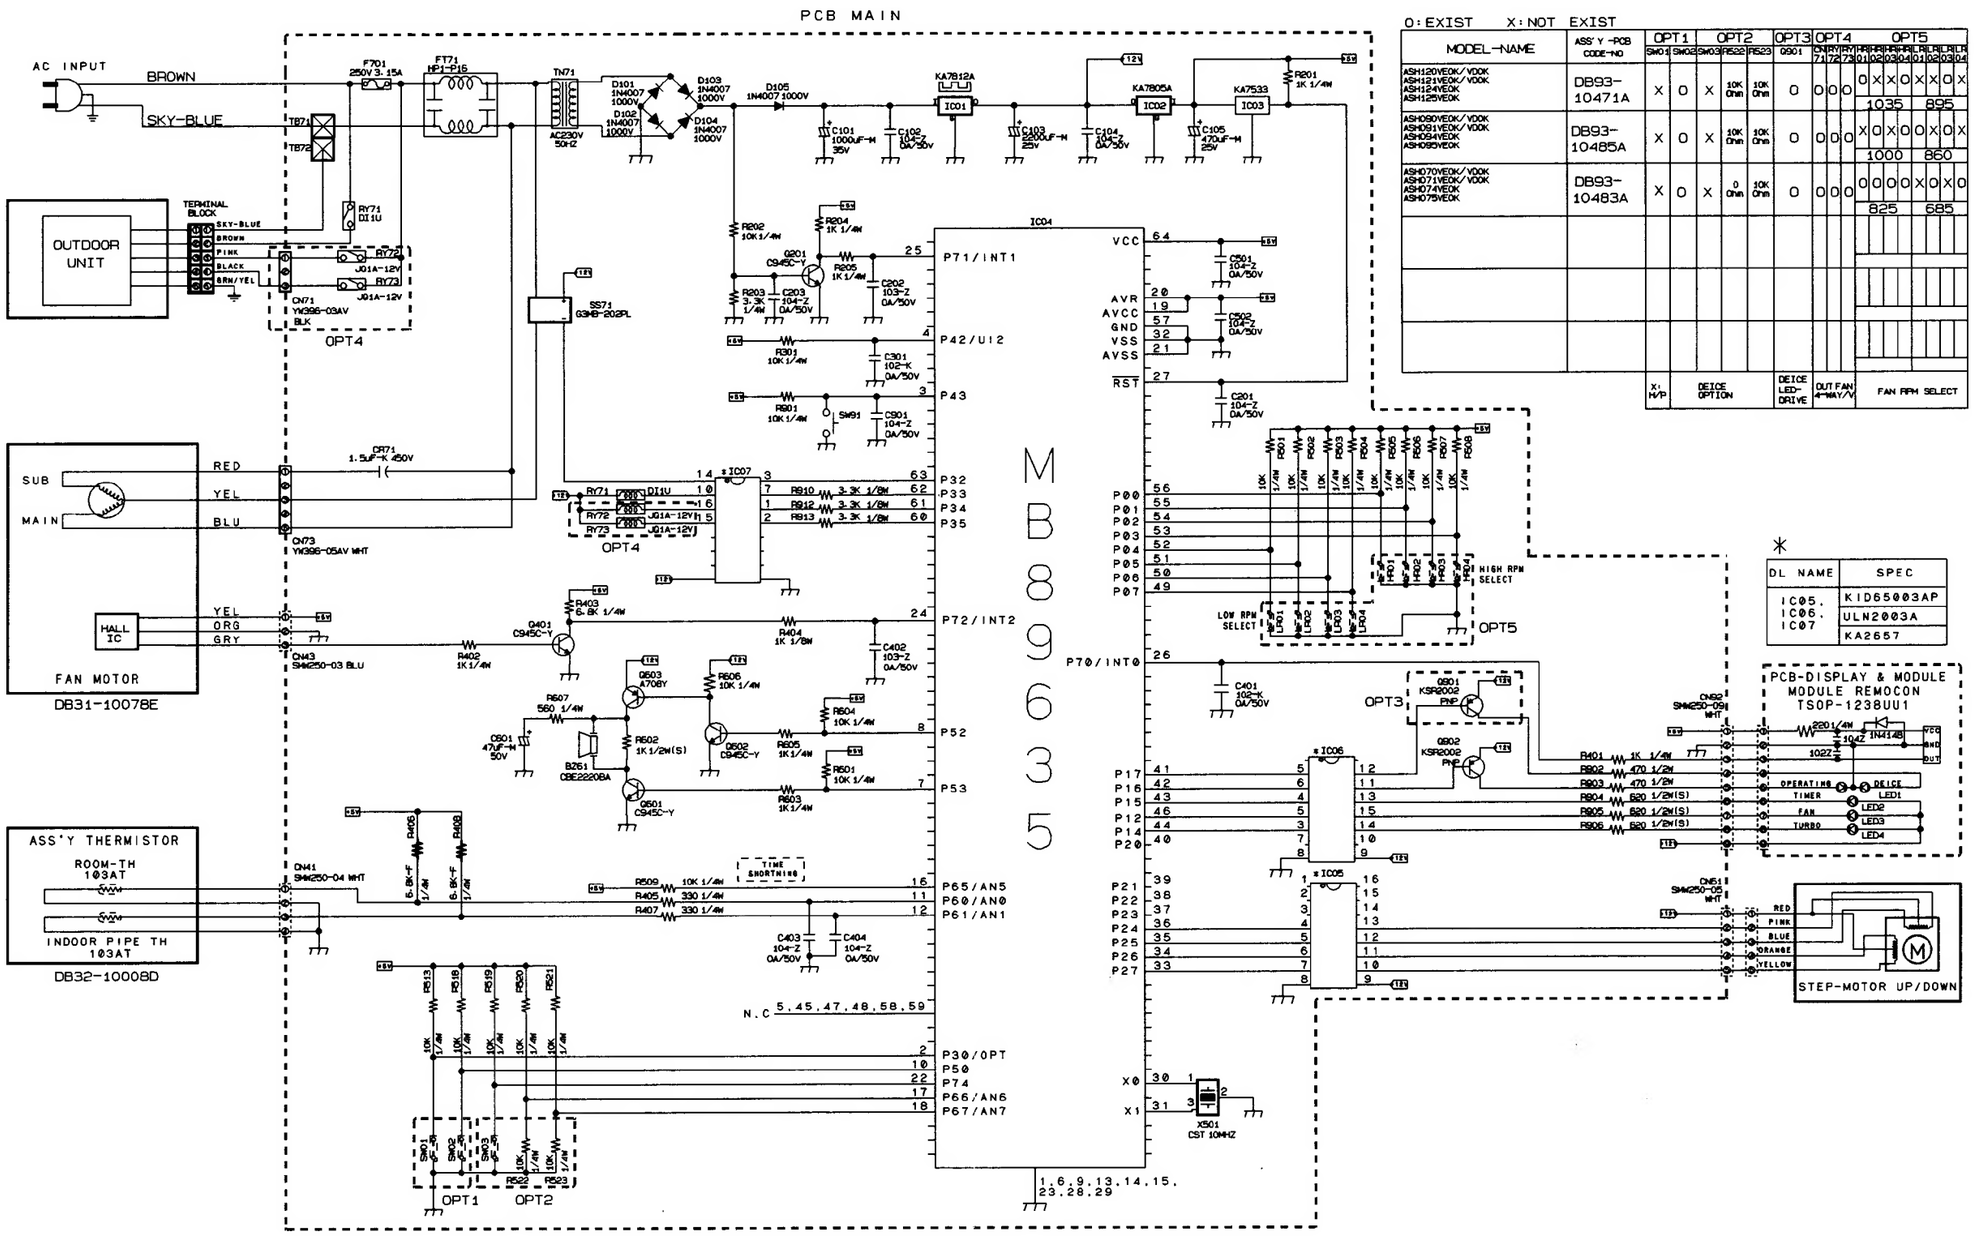

O:EXIST X:NOT EXIST

MODEL-NAME	ASS'Y-PCB CODE-NO	OPT1 SW01	OPT1 SW02	OPT2 SW03	OPT2 RS22	OPT2 RS23	OPT3 Q901	OPT4 CN-RY 71	OPT4 CN-RY 72	OPT4 CN-RY 73	OPT5 RA-RA 01	OPT5 RA-RA 02	OPT5 RA-RA 03	OPT5 RA-RA 04	OPT5 RL-RL 01	OPT5 RL-RL 02	OPT5 RL-RL 03	OPT5 RL-RL 04
ASH120VEOK/VDOK ASH121VEOK/VDOK ASH124VEOK ASH125VEOK	DB93-10471A	X	O	X	10K Ohm	10K Ohm	O	O	O	O	O	X	X	O	X	X	O	X
											1035				895			
ASH090VEOK/VDOK ASH091VEOK/VDOK ASH094VEOK ASH092VEOK	DB93-10485A	X	O	X	10K Ohm	10K Ohm	O	O	O	O	X	O	X	O	O	X	O	X
											1000				860			
ASH070VEOK/VDOK ASH071VEOK/VDOK ASH074VEOK ASH075VEOK	DB93-10483A	X	O	X	0 Ohm	10K Ohm	O	O	O	O	O	O	O	O	X	O	X	O
											825				685			
		X: M/P	DEICE OPTION				DEICE LED-DRIVE	OUT FAN 4-WAY/V	FAN RPM SELECT									

*

DL NAME	SPEC
IC05, IC06, IC07	KID65003AP
	ULN2003A
	KA2657

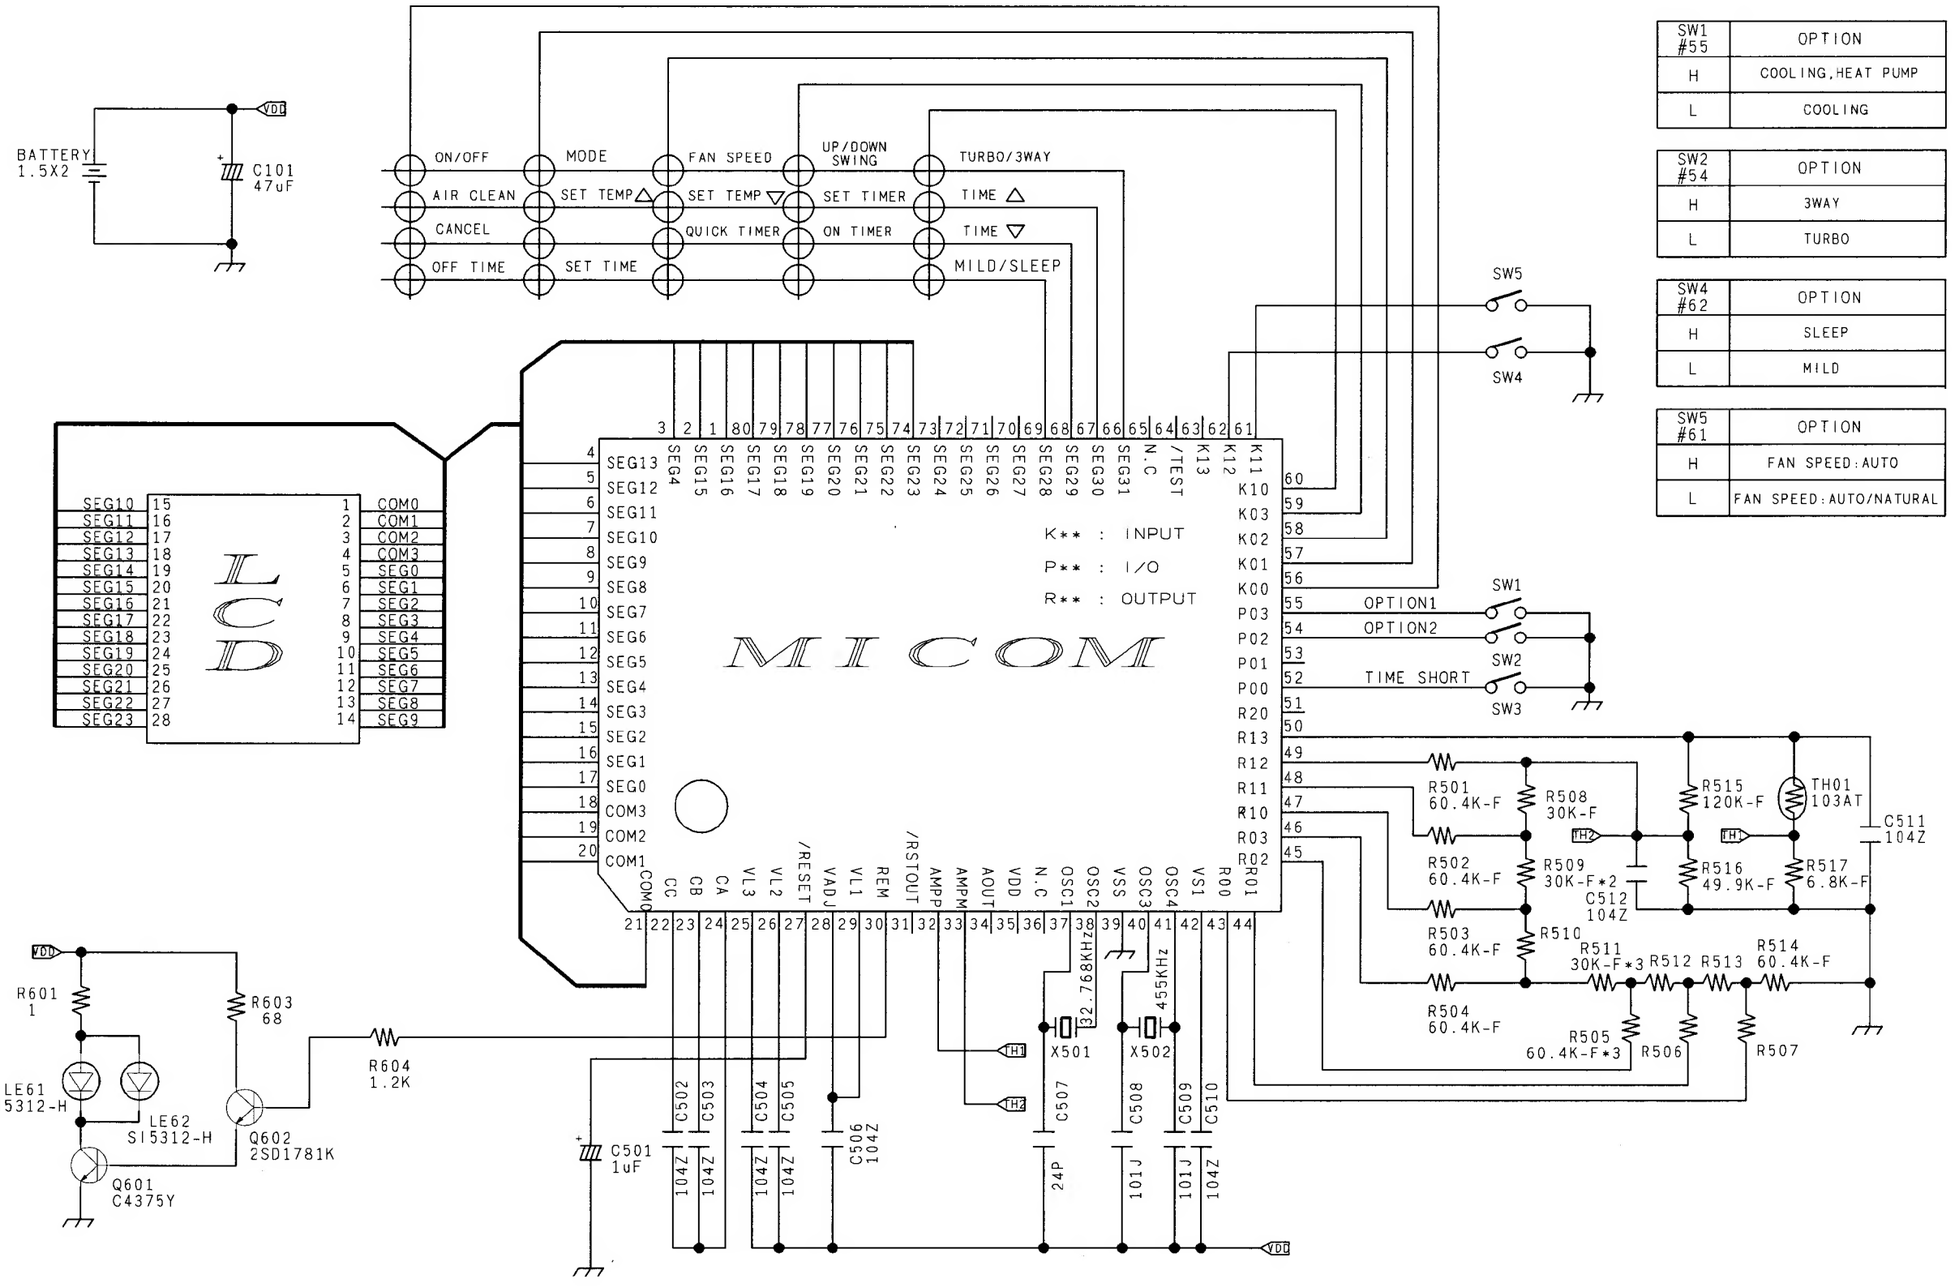

SW1 #55	OPTION
H	COOLING,HEAT PUMP
L	COOLING

SW2 #54	OPTION
H	3WAY
L	TURBO

SW4 #62	OPTION
H	SLEEP
L	MILD

SW5 #61	OPTION
H	FAN SPEED:AUTO
L	FAN SPEED:AUTO/NATURAL

UPDA TE LOG SHEET

Application date	Page	Part#	Note(Cause & Solution)	S/Bulletin#

Use this page to keep any special servicing information. (Service Bulletin, etc.)
If only parts number changes, Just change parts number directly on parts list.
And if you need more information, please see the service bulletin

Copyright

®œ 1995 by Samsung Electronics Co., Ltd.
All rights reserved.
This manual may not, in whole or in part, be copied, photocopied, reproduced, translated, or converted to any electronic or machine readable from without prior written permission of Samsung Electronics Co., Ltd.

SyncMaster 17GLi/CMG7387L Service Manual
First edition June 1995.

Printed in Korea.

Trademarks

Samsung is a registered trademark and SyncMaster 17GLi/CMG7387L and MacMaster Cable Adapter are trademark of Samsung Electronics Co., Ltd.

Macintosh, Centris, Quadra, Duo Dock, and Power Macintosh are trademark of Apple computer, Inc.

All other trademarks are the property of their respective owners.